


800FM-F3



D7PX11 – Contact Block Screw
Sold Separately



800FM-F3 – Button Only

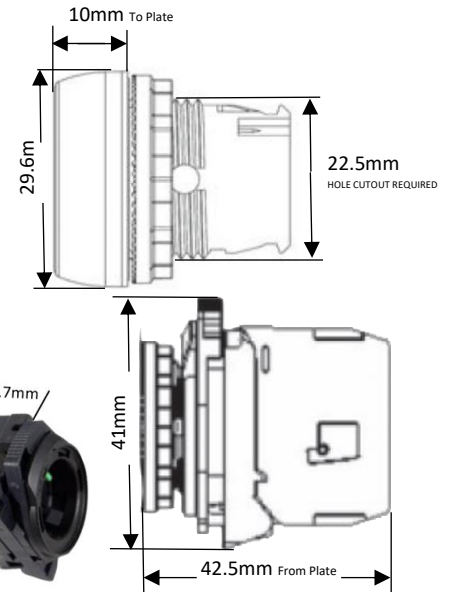

Series : 800FM

Material : Plastic

Component Type : Pushbutton

Component Style : Flush Type

Button Color : GREEN

Button Diameter: 29.6 mm

Mounting Cutout Hole Size : 22.5 mm

Material – Operator : Zinc Alloy, Die Cast, Chrome Plated

Material – Bezel : Zinc

Material – Body/Housing : Body – Plastic, Housing – Zinc

Material – Spring : Stainless Steel

Operator Action : Momentary

Coupling Pate Included : NO (Requires D7PX11)

Contact Block Included : NO (Requires D7PX11)

IP Rating : IP66

Illuminated : NO

Tightening Torque Nominal : 4.4 Nm

Relative Humidity : 50% ~ 95% RH

Mechanical Service Life : 10000000 cycles

Shock Acceleration MAX : 100 g

Shock Duration MAX : 11 ms

Operating Temperature : -25° ~ 70° C

Storage Temperature : -40° ~ 85° C

Vibration Acceleration MAX : 10 m/s²

Vibration Displacement (Peak to Peak MAX) : 1.52 mm

Vibration Duration MAX : 180 Mins

Vibration Frequency – Operational MAX : 2000 Hz

Illuminated : No

Button Size : 29.6DIA x 32D (mm)

Certifications : UR, UL, CSA, CCC, CE, RoHS

Standards Compliance : NEMA ICS-5, UL 508, EN 60947-1, EN 60947-5-1, EN 60947-5-5, IEC 60947-1, ISO 13850

CE Marked : Yes

RoHS Approved : Yes