

34 Yale Drive, Epping VIC 3076
Ph (03) 9408 9907 Fax (03) 9408 9920
www.lockitwell.com.au for Full Product Information

“R Series” Removal Cylinder



Panel Mount	“A” Stage		“B”
	1	2	
Digit 5 = 1,4,7	61mm	70mm	43mm
Digit 5 = 2	65mm	77mm	47mm

Max Material Thickness 4mm



Lift Mount	“A” Stage		“B”
	1	2	
Digit 5 = 1,4,7	71mm	81mm	43mm
Digit 5 = 2	75mm	88mm	47mm

Thread Max Material Thickness 22mm

Cylinder Max Material Thickness 2.5mm

Optional Mounting Types


 Surface Mount Box
LIW Order Code "KEJB1"

 Water Resistant Box
LIW Order Code "KEWP1"

 Stainless Steel
LIW Order Code "PZ11"

The "R" series uses a unique removable cylinder enabling convenient master keying and key recombination of rental properties. The key may be removed or held captive in any switched position. This series is available in a variety of mounting types including panel, lift, bezel and wall plate. It is also available in a wide range of switching configurations.

Features

Incorporates specialised lock cylinders for key removable in multiple positions.
Cylinder removable from front without risk of the switch falling apart.

May be master keyed into most common lock brands and high security lock systems.
Electrical isolated cylinder for added safety

Specialised Security Products

Patented & Registered Designs

©copyright Lock It Well 2023

 R -Series
2023

How To Order

RL121003

Digit 1
"Removable Series"

Digit 2 "Lock Type"

- A Astra
- B Bilock
- D Abloy (Protec & Disklock)
- E Efco
- G Kaba Modular
- H Kaba Gege
- K Kaba Quattro (Old Size Core)
- L Lockwood** (6-Pin Inline)
- P Binary Plus
- S Schlage
- T Lockwood Twin
- V Lockwood V7
- W Evva
- O Other

Digit 3 "Mounting"



Digit 4 "Key Removal"

- 1 Position
- 2 Position
- 3 Position
- 4 Position
- 5 Position
- 6 Position

Spring Return=1 Position.
Note: Specify if Captive Positions are Required.

Digit 5 "Electrical Rating"

- 1 -Mains Voltage** (Standard)
 - Silver Button Contacts
 - AC21A 20Amp
 - DC1 24V-20Amp
- 2 -Mains Voltage/Amps**
 - Silver Button Contacts
 - AC21A 32Amp
 - DC1 24V-25Amp
- 4 -Low Current** (Low Bounce)
 - Silver H-Bridge Contacts
 - AC21A 12V-5Amp
 - DC1 12V-3Amp
- 7 -PLC Data** (Low Bounce)
 - Gold H-Bridge Contacts
 - AC21A 12V-2Amp
 - DC1 12V-1.5Amp

The Example shown is for a R-Series Lockwood 6-pin inline, Panel mount, with key removal in 2 positions at 240V at 20 amp switch.

Digit 6,7&8 "Switch Circuits"


Note: Refer to full switch circuits for other switch configurations

60 degree	90 degree	Spring Return
003 position 1 2 3 4 5 6	105 position 1 2 3 4	004 position 1 2 3 4 5 6
001 position 1 2 3 4 5 6	002 position 1 2 3 4	008 position 1 2 3 4 5 6
010 position 1 2 3 4 5 6 7 8 8 9 9 10 10 11	023 position 1 2 3 4 5 6	007 RAISE 2 LOWER 2 position 1 2 3 4 5 6 7 8 8 9 9 10 10 11
011 position 1 2 3 4 5 6 7 8 8 9 9 10 10 11	070 position 1 2 3 4 5 6 7 8 8 9 9 10 10 11	070 position 1 2 3 4 5 6 7 8 8 9 9 10 10 11
005 position 1 2 3 4 5 6 7 8 8 9 9 10 10 11	999 you specify position 1 2 3 4 5 6 7 8 8 9 9 10 10 11 11 12	
005 position 1 2 3 4 5 6 7 8 8 9 9 10 10 11	999 you specify position 1 2 3 4 5 6 7 8 8 9 9 10 10 11 11 12	

Key
■ = Contact
○ = Terminal
← = Spring Ret

Engraving

Some switch types have common
engraving. If you have special requirements
Please show them in the following way at time of order.

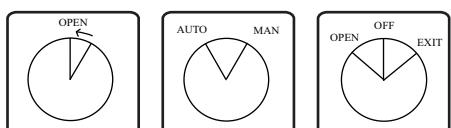

Note: Charges may apply



"R Series"
Cylinder Cam
LIW Code "PR05"

Optional Mounting Types



Surface Box Mounting

LIW Order Code "KEJB1"
100mm X 100mm X 100mm
Order with Panel Mounting Only



Water Resistant Box Mounting

LIW Order Code "KEWP1"
100mm X 100mm X 100mm
Order with Panel Mounting Only



Stainless Steel Mount

LIW Order Code "PZ11"
75mm X 115mm
Order with Panel Mounting Only



Clipsal 2000 Series Wall

LIW Order Code "EZY WALL"
75mm X 115mm
Order with Panel Mounting Only



Flush Fit - Studless

LIW Order Code "DL Studless"
Diameter = 40mm Hole Size = 36mm
Order with Lift Mounting Only