


# T-001T

## 9000 SERIES PLUG-IN MODULE

The T-001T is a plug-in module designed for use with the 9000 Series amplifiers and can provide two independent balanced outputs. It can drive load of 600 Ohm# up to +16 dB. It can process effect for TONE/EQ/COMPRESSOR to two outputs independently..

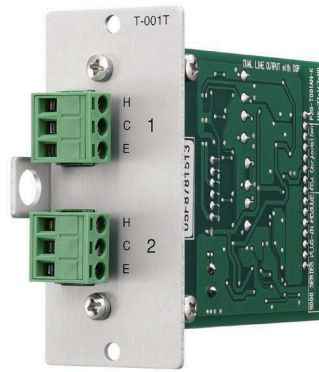

Article number:T-001T


### Specifications

Power source	24 V DC
Power source	24 V DC
Frequency response	20 Hz - 20 kHz (+1 / -3 dB)
Frequency response	20 Hz - 20 kHz (+1 / -3 dB)
Distortion	< 0.005 % (at 1 kHz, 20 Hz - 20 kHz BPF, 5 V output, 10 kOhm load)
Current consumption (value)	35,0 mA
S/N ratio	73 dB (at 20 Hz - 20 kHz BPF)
Crosstalk	87 dB
Current consumption	35 mA
S/N ratio	73 dB (at 20 Hz - 20 kHz BPF)
Distortion	< 0.005 % (at 1 kHz, 20 Hz - 20 kHz BPF, 5 V output, 10 kOhm load)
Equalizer / Filter	Parametric Equalizer: 10 bands, Frequency: 20 Hz - 20 kHz, 31 points, Variable range: ±12 dB, Q: 0.3 - 5 Speaker Equalizer: 10 (setup software has 30 TOA speaker presets) High-pass Filter: -12 dB/oct, Variable frequency range: 20 Hz - 20 kHz, 31 points Low-pass Filter: -12 dB/oct, Variable frequency range: 20 Hz - 20 kHz, 31 points Compressor: Depth: 1 - 5 Delay: 0 - 40 ms (1 ms step), maximum 40 ms (CH 1 + CH 2), mixer mode only
Finish	Aluminium, hairline,
Operating temperature	-10 °C to +40 °C

# T-001T

## 9000 SERIES PLUG-IN MODULE

### Appearance

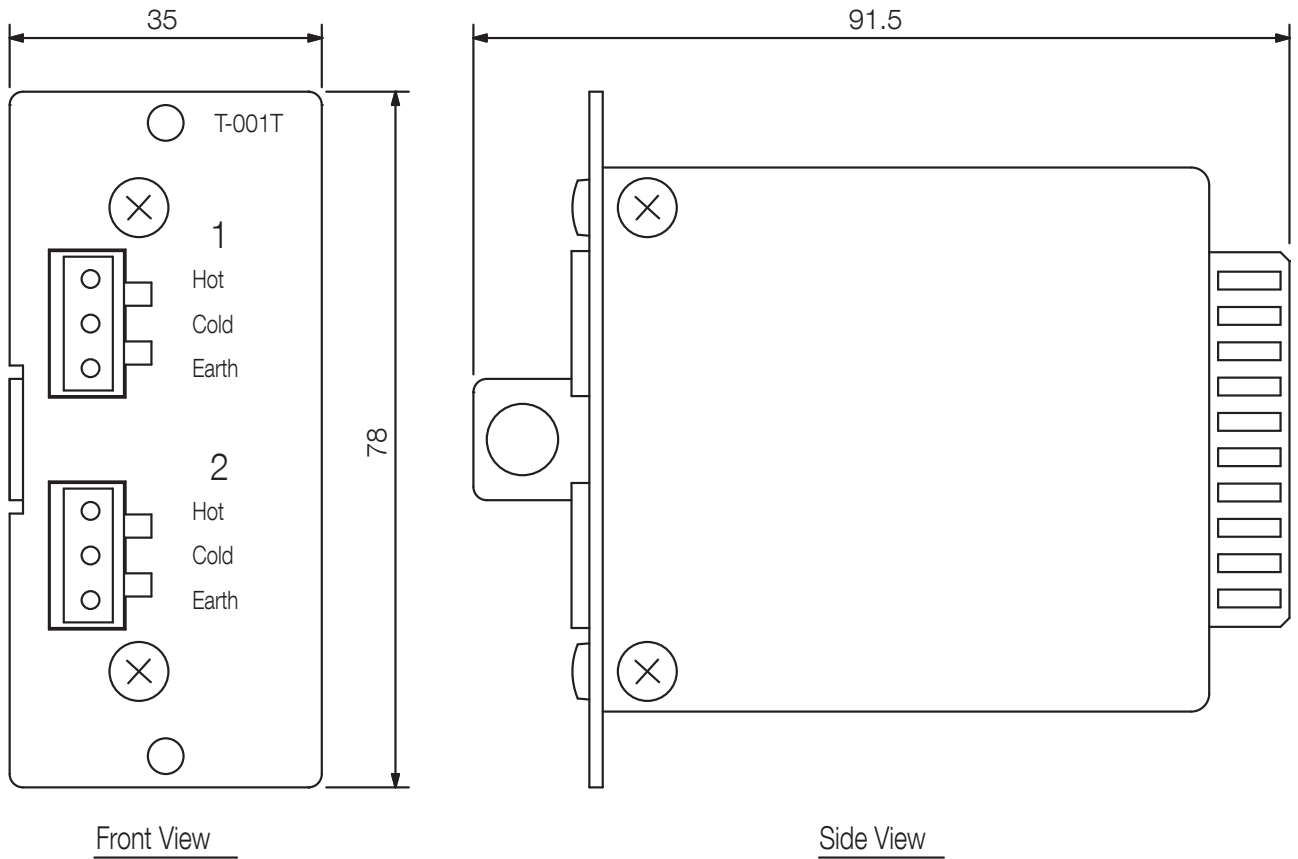

UNIT:mm

SCALE:1/1