

# Hands-Free Color Video Multi-tenant Building System with Zoom & PanTilt

## Entrance station


### All-in-one type



**GT-DMB-N**  
Available 3rd Quarter 2017  
W/NFC reader  
(Back box not included.)  
Use GF-3B.

**GT-DMA**  
Available 1st Quarter 2017  
W/O NFC reader

### Module type

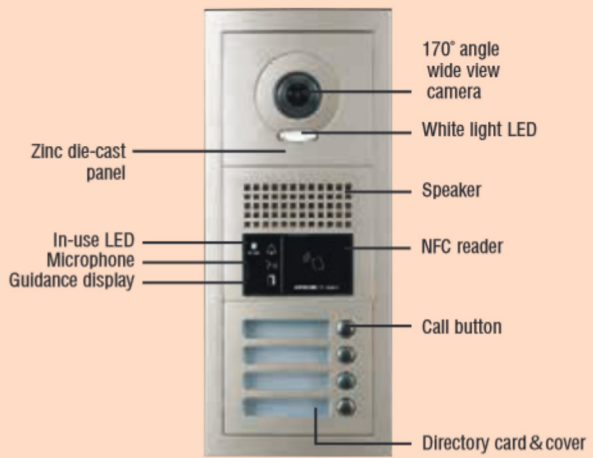

### Camera Module



**GT-VP**  
Camera panel



**GT-VB**  
Camera module  
for GT-DB(-VN)  
Available 3rd Quarter 2017



**GT-VAA**  
Camera module  
for GT-DA(-L)  
Available 1st Quarter 2017

### Audio Module



**GT-DBP**  
Audio panel  
for GT-DB(-VN)  
Available 3rd Quarter 2017



**GT-DB**  
Audio module  
W/O NFC reader  
Available 3rd Quarter 2017



**GT-DB-VN**  
Audio module  
W/NFC reader  
Available 3rd Quarter 2017



**GT-DP**  
Audio panel  
for GT-DA



**GT-DA**  
Audio module



**GT-DP-L**  
Audio panel  
for GT-DA-L



**GT-DA-L**  
Audio module  
W/guide display

### Specifications (GT-DMB-N,GT-DMA)

Power source	24V DC, supplied by PS-2420
Video monitor	3.5-inch TFT color LCD
Camera	1/4-inch color CMOS
Communication	Open voice hands-free communication
Mounting	Flush wall-mount
Material	Stainless steel
IP rating	IP54
IK rating	IK07

\* GT-DMA cannot be used in the tenant sections and common sections of a multi building systems.

### Specifications (GT-VB,GT-VAA,GT-DB,GT-DB-VN,GT-DA,GT-DA-L)

Camera	GT-VB, GT-VAA : 1/4-inch color CMOS
Communication	GT-DB, GT-DB-VN, GT-DA, GT-DA-L : Open voice hands-free communication
Wiring	Two single-pair cable common
Type of cable	2-conductor cable solid copper & non-braided, polyethylene insulation, 0.65mm dia.~1.0mm dia.
Mounting	Box and front frame GF-2B, 3B and GT-4B, and GF-2F, 3F and GT-4F
Material	GT-VB, GT-VAA: Self-extinguishing PC + ABS resin GT-DB, GT-DB-VN: Self-extinguishing ABS resin GT-DA, GT-DA-L: Fire-retardant plastic

\* GT-DB and GT-DB-VN cannot be used in the common sections of a multi building systems.

\* GT-DA and GT-DA-L cannot be used in the tenant sections and common sections of a multi building systems.