



DESCRIPTION

The IXG-DM7 is an IP video entrance station for the IXG Series multi-tenant system. It is equipped with a 7 inch LCD directory screen that is used for calling a tenant or entering an access entry code. Up to 9,999 names/numbers can be stored in the station. A motion sensor will activate the screen when the visitor approaches. Once a call is placed, the visitor will be displayed on the tenant station or app using the 720p HD camera. Up to 10 entrance stations can be within a unit (i.e. interior, exterior) with multiple units allowed in the system.


FEATURES

- 7" touchscreen
- PoE compliant
- On-board recording with microSD card
- Simple user interface
- Hands-free audio communication
- 720p HD camera
- Up to 9,999 names/numbers can be stored
- Programmable contact inputs and outputs
- Motion sensor to activate LCD
- Stainless steel panel
- Rugged IP65 and IK08 ratings

IXG-DM7

IP Video Entrance Station

FEATURE CALL-OUT

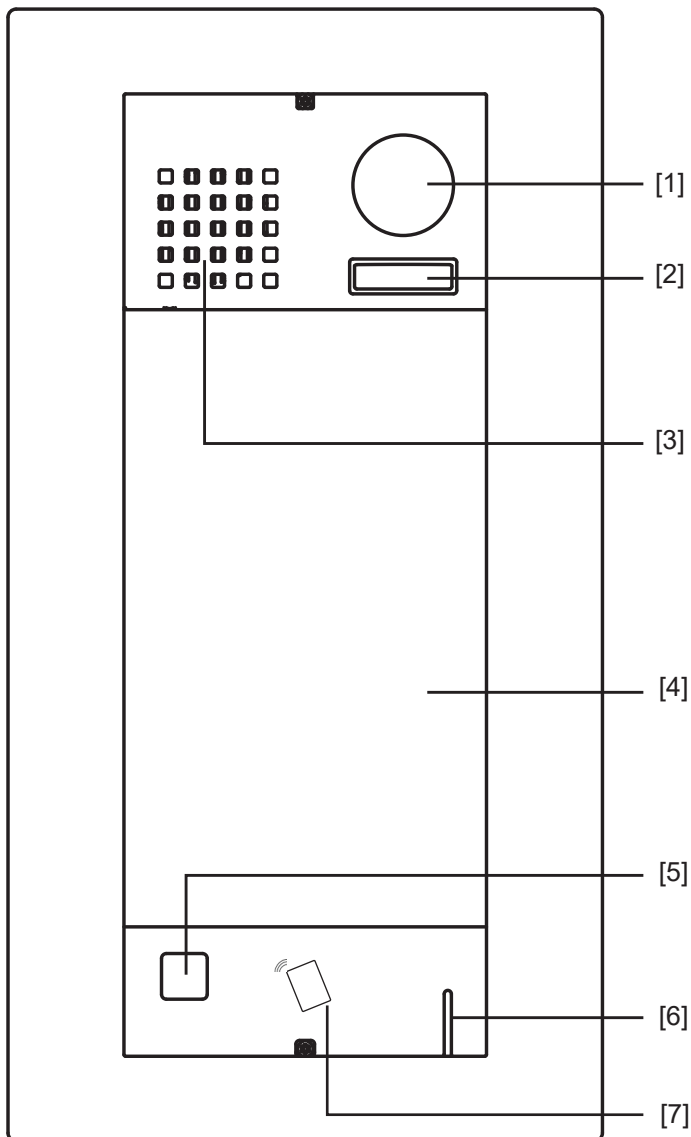

FEATURE CALL-OUT DEFINITIONS

[1] Camera

[2] White LED

[3] Speaker

[4] LCD Touch Screen

[5] Sensor

[6] Microphone

SPECIFICATIONS

Power Source: PoE (IEEE 802.3af Class 0)

Consumption: 5.3 W Standby, 11.6 W Max.

Screen: 7" TFT LCD Display

Monitor resolution: 800 x 400

Communication: Full-duplex

Audio Codec: G.711(μ -law, A-law)

Video Codec: H.264

Protocol: IPv4/v6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP/RTCP, IGMP, MLD, SMTP, FTP, DHCP, NTP, DNS, TLS

Operating Temp: -22° ~ 140°F (-30° ~ 60°C)

Dimensions: 13-¹¹/₁₆" H x 7-³/₁₆" W x 2" D