

**DESCRIPTION**

The IXGW-GW is a gateway adaptor for the IXG Series IP multi-tenant system. Only 1 gateway adaptor is allowed per system. This adaptor allows the system to be programmed to call cloud-based mobile apps, giving users the ability to answer the calls from visitors remotely and release the door.

The IXG app is compatible with iOS® and Android® mobile devices. Up to 8 apps can be registered per tenant station.


FEATURES

- PoE compliant
- DIN Rail mountable
- 8 simultaneous call paths
- Supports up to 9,999 IXG apps

IXGW-GW

Gateway Adaptor

FEATURE CALL-OUT

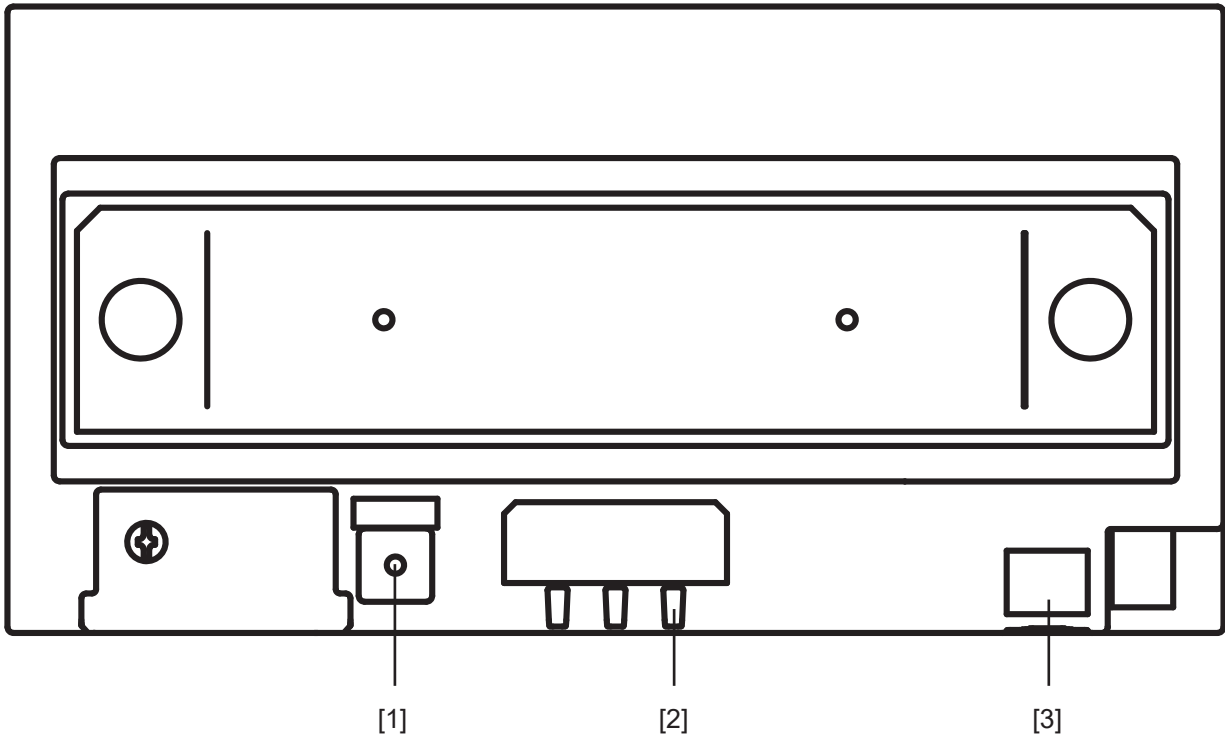

FEATURE CALL-OUT DEFINITIONS

[1] Reset

[2] Status Indicator (orange/green)

[3] LAN Port (PoE)

SPECIFICATIONS

Power Source: PoE

Consumption: Standby 2.1W, Max 2.9W

LAN: Ethernet
(10BASE-T, 100BASE-TX)

Packet delivery: Unicast, Multicast

Protocol: IPv4/v6, TCP, UDP, SIP,
HTTPS, RTP, RTCP, SRTP,
SRTCP, IGMP, MLD, SFTP,
DHCP, NTP, DNS, MQTT,
ICE, DTLS, SDP

Channel: 8

Encryption: TLS 1.0, 1.1, 1.2

Operating Temp: 14° ~ 122°F (-10° ~ 50°C)

Dimensions: 4-1/4" H x 8-1/4" W x 2-3/8" D