

### DESCRIPTION

The IXGW-LC is a lift control adaptor for the IXG Series IP multi-tenant system. This adaptor allows for integration to the elevator control system allowing the elevator to be called to specific floors based on which tenant opened the door.

The IXGW-LC is equipped with 20 Form C relays and up to 16 adaptors can be included in a building. Each relay can be configured and assigned to a specific entry, tenant station, or app. Individual relay contacts can be activated when a specific tenant activates door release on a specific entry panel allowing the elevator to open and go to a specific floor. Additionally the elevator recall button on the IXG-2C7 can be used to activate a contact to recall the elevator to that specific floor.


### FEATURES

- PoE compliant
- 20 Form C relays
- Relay rating (24V AC/DC 500mA)
- Max of 16 adaptors per building

# IXGW-LC

## Lift Control Adaptor

### FEATURE CALL-OUT

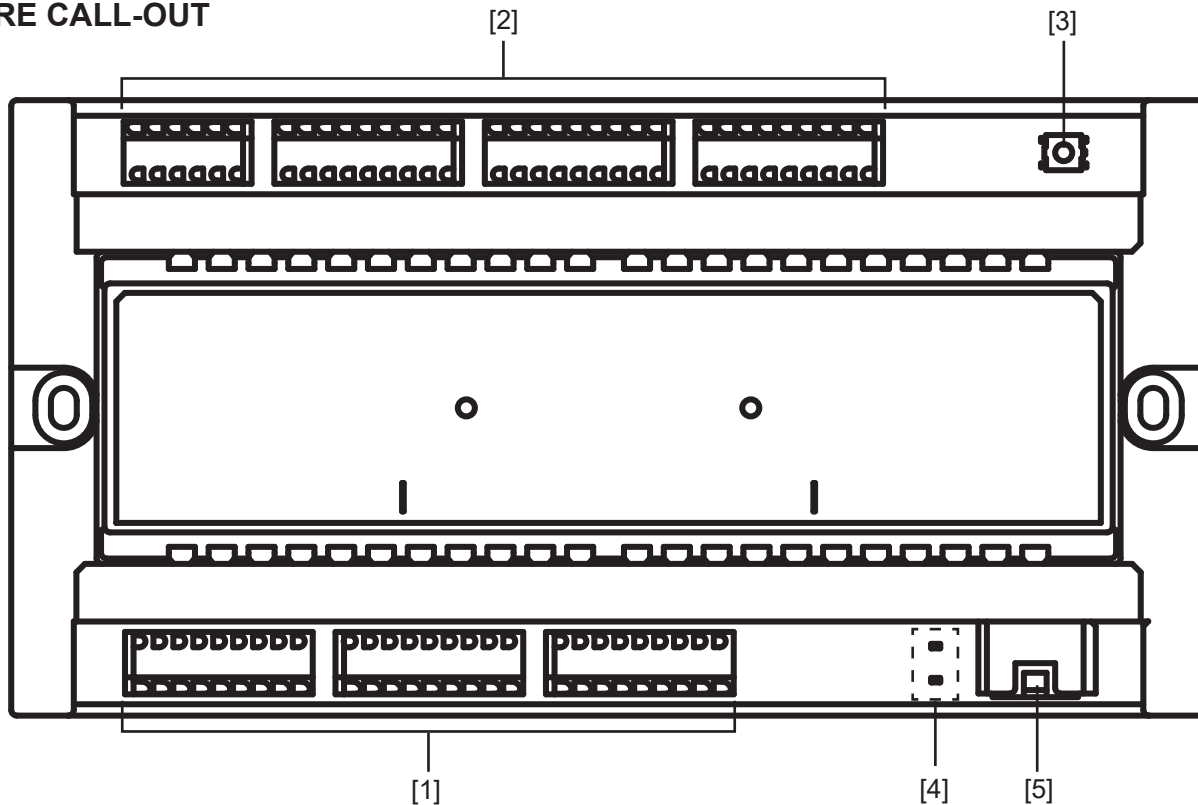

### FEATURE CALL-OUT DEFINITIONS

- [1] Relays 1-9
- [2] Relays 10-20
- [3] Reset button
- [4] Status Indicators (orange/green)
- [5] LAN Port (PoE)

### SPECIFICATIONS

- |                  |   |
|------------------|---|
| Power Source:    | PoE   |
| Consumption:     | Standby 2.1W, Max 4.4W  |
| LAN:             | Ethernet<br>(10BASE-T, 100BASE-TX)  |
| Packet delivery: | Unicast, Multicast  |
| Protocol:        | IPv4/v6, TCP, UDP, HTTP,<br>HTTPS, IGMP, MLD, FTP,<br>DHCP, NTP, DNS, TLS |
| Encryption:      | TLS 1.0, 1.1, 1.2   |
| Operating Temp:  | 14° ~ 122°F (-10° ~ 50°C)   |
| Dimensions:      | 4-1/4" H x 8-1/4" W x 2-3/8" D  |