

# 214/215 Series 10mm Radius Corner Push/Pull Plates



## Application

The 214 Series Door Furniture is 300 x 100 x 2mm thick stainless steel or brass plates with 10mm radius corners. Concealed fixed plates have studs with internal threads located in each corner, visible plates have corresponding countersunk holes and are fixed back to back through the door.

Designed for use with Lockwood 3570 Synergy Series and 3770 Selector Series Mortice Locks.

## Function/Handle Selection

Certain functions require certain handles to be used. The following table outlines which length handles (screw centre distance shown) should be used for a given function.

## Product Details

<b>Dimensions</b>	Length: 300mm
	Width: 100mm
	Thickness: 2mm
	Handle Diameter: 17.5mm Finger Clearance: 40mm
<b>Materials</b>	Stainless steel or brass
<b>Door Thickness</b>	35 to 45mm standard. For doors 45 to 55mm thick, specify long fixing screws SP2000-208.
<b>Finishes</b>	Satin Stainless Steel (SS)
	Polished Stainless Steel (PS)
	Powdercoat (PC)
	Polished Brass (PB)

## Standards and Compliance



Disabled Access - AS1428.1



Successfully tested up to 4 hours on fire door assemblies in accordance with Australian Standard AS1905.1 2005 - Part 1: Fire Resistant Doorsets.

# 214/215 Series 10mm Radius Corner Push/Pull Plates

## D Handle Selections



### Handle 17.5mm


P1      P2      P3      P4

Centres      108mm      152mm      203mm      250mm


Function	Description	No Engraving	With Engraving
24	Pull Handle Only	P4	P3
25	Pull Handle and Cylinder	P2	P2
26	Pull Handle and Emergency Turn	P2	P2
27	Pull Handle and Turn Knob	P2	P2
28	Pull Handle and Privacy Indicator Emergency Turn	P2	P2
42	Pull Handle and Disabled Turn	P2	P1
44	Pull Handle Only – Offset from Bottom	P1 P2	x

**Note:** x indicates this function is not available in this configuration.

## External Plates

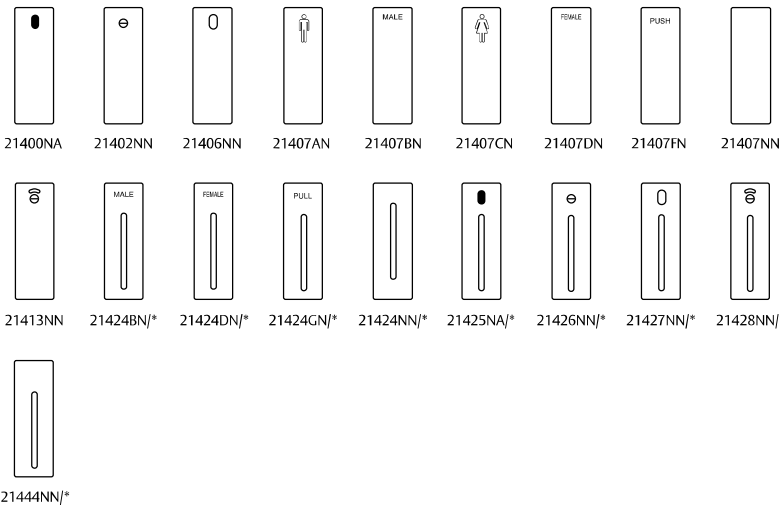

## Internal Plates

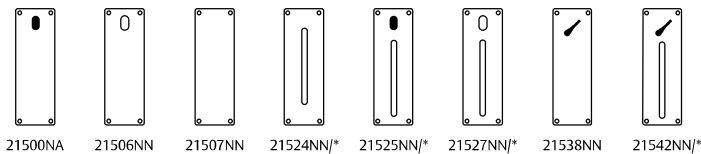

### Legend

Cylinder Hole		Slotted Button		Indicating Slotted Button	
Turn-Snib		Disabled			