

724 Series Door Closer



A range of adjustable power door closer units suitable for architectural and commercial applications.

Short arm to suit 400mm width door is also available (SP7724-130SIL)

Specifications

Power	EN adjustable 2 to 4
Back check (BC)	Adjustable
Hold Open	Adjustable. Hold-open can be set at any angle up to 150° of opening.
Handing	Non-handed Suitable for left or right hand doors
Cover	Clip-on
Materials	Extruded aluminium body manufactured from high-performance silicon alloy
Mechanism	Rack and pinion design
Mounting	Regular, parallel and over-door
Valves	Adjustable closing and latching speed valves with overload protection

Ordering Information

Model	Part Number	Finish
Standard Arm	724SSS	Satin Stainless Steel
	724PSS	Polished Stainless Steel
	724SIL	Silver
	724BLK	Black
Hold-Open	724HSSS	Satin Stainless Steel
	724HPSS	Polished Stainless Steel
	724HSIL	Silver

For formed cover with these finishes add:
 7724-171 (SSS,PSS) option
 724SIL + 7724-171SSS = 724SSS

Standards and Compliance



The Lockwood 724 series closer has been successfully tested up to four hours (depending on type of doorset) on fire door assemblies in accordance with Australian Standard AS1905.1:2005, Part: Fire Resistant Door sets.


Note: Hold open option is not approved on any fire door.

724 Series Door Closer

724 Standard Arm

Part Numbers	Description
724	Non hold-open
724H	Hold-open


Closer installed on pull side of door. This mounting position permits opening of 180°.

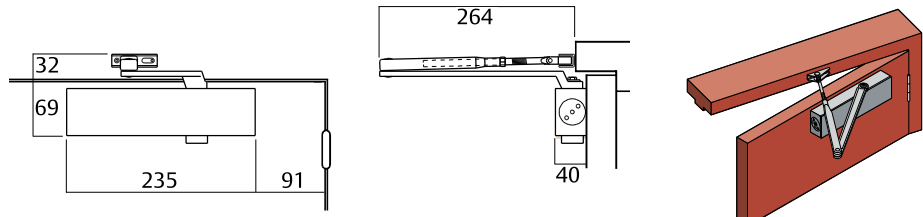

724 Parallel Arm

Part Numbers	Description
724	Non hold-open
724H	Hold-open

Closer installed on push side of door. This mounting position permits opening of 180°.

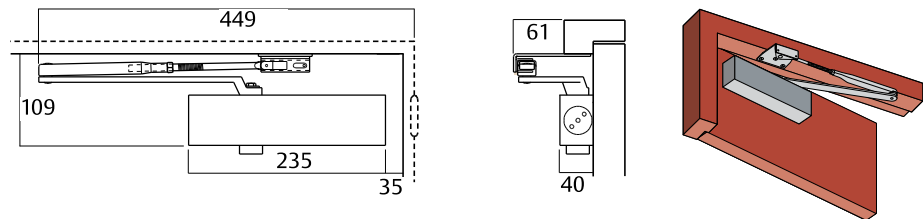

724 Over Door Mounting

Part Numbers	Description
724	Non hold-open
724H	Hold-open

Closer installed on push side of door and top rail where conditions do not allow parallel mounting. This mounting position permits opening of 180°.

