

# ABLOY® EP400, EP401, EP402

## Key Operated Switch Locks

ABLOY® switch locks provide key-actuated switching for burglar alarms, control boxes and other high security applications.

Locks can be fitted on panels from 0.5 mm to 22 mm thick

### EP400

Key removable in 'on' and 'off' positions

### EP401

Key removable in 'off' positions

### EP402

Momentary-contact key removable in 'off' position

**Number of Discs:** 11

### Material Finish

**Cylinder housing:** Chrome-Plated Brass  
**First disc:** Case-Hardened Nickel-Plated Steel  
**Hex nut:** Zinc-Plated Steel  
**Coupling piece and switch mounting plug:** Molded Plastic

Other parts: Brass, Stainless Steel, Tin Bronze

### Microswitch

Honeywell 1SX1-H58 for contacting with AMP 0.058 inch (1.47 mm) reseatables

### Electrical Specifications

7A, 250 VAC  
 7A res., 28 VDC  
 4A ind., 28 VDC

### Operational range

-54° to +120 °C






### Keying Platforms

ABLOY® PROTEC<sup>2</sup> CLIQ(T)  
 ABLOY® PROTEC<sup>2</sup> (T)  
 ABLOY® PROTEC CLIQ(N)  
 ABLOY® PROTEC (N)  
 ABLOY® SENTRY (B)  
 ABLOY® CLIQ Express (CE)

### Diagram Circuit

C = Common  
 NO = Normally Open  
 NC = Normally Closed

Note: EP400, EP401 and EP402 are available in CLIQ with the product codes EPL410, EPL411 and EPL412.

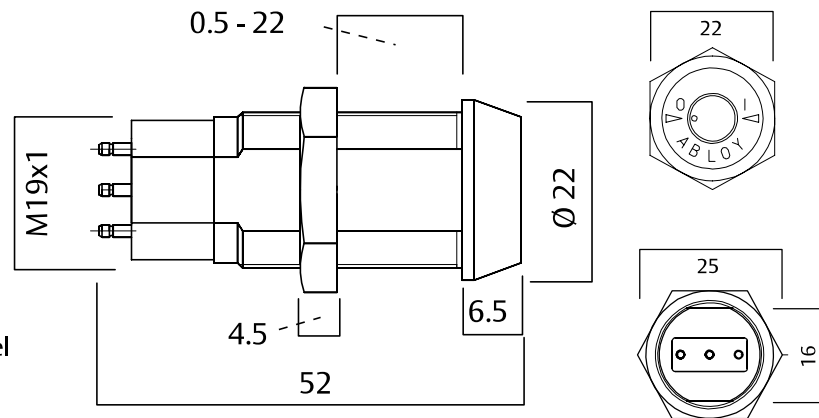

### Ordering Information

Product Description	Part Number
Assembled to Code	EP400#/CP
Assembled to Code	EP401#/CP
Assembled to Code	EP402#/CP
Unassembled	EP400#/UA/CP
Unassembled	EP401#/UA/CP
Unassembled	EP402#/UA/CP