

Any one of the IP modules shown on the right can be installed. IP via WiFi is available when the WiFi keypad is used.

P/N - CM743B
Plug On GSM/
GPRS Module




P/N - CM365B
IP Communications Module
2G GSM/GPRS/SMS/Ethernet




P/N - CM751B
Plug On Ethernet
IP Module




P/N - CM101B
Interactive Voice
Control Module



P/N - CC610B
Solution 6000 Security
Controller with Enclosure




P/N - CM195
Multi RF Receiver
Interface



x1

1 x RF3212E Receiver
Directly Connected



P/N - SW500B
Upload/Download
Software
(V2.10 or higher)




P/N - SW501B
Site Manager
Onsite Administration
Software
(IP Connectivity Required)

P/N - CM710B
4 Way LAN Relay
Output Expander
Module



x8

P/N - CM720B
1AMP LAN Power
Supply & Battery
Charger Module



x8

Panel supports direct
RX connection or via
CM195.

P/N - CP050B
Night Arming
Station



P/N - CP151B
Slim Style
External Keypad



Graphic Keypad
P/N - CP700B White
P/N - CP710B Black



Up to 16 keypad devices of any type can be installed on the Solution 6000 panel.

This includes Keypads, Readers and Wiegand to LAN Interfaces.



Fingerprint Reader
P/N - CM729B White
P/N - CM728B Black



P/N - CP150B
External Keypad



Graphic Keypad With WiFi
P/N - CP740B White
P/N - CP743B Black

SMART CARD CREDENTIALS AND LAN READERS

P/N - PR365
Adhesive Smart Card Sticker

P/N - PR301
Smart Card Token with Keyring

P/N - PR350
ISO Smart Card

Graphic Keypad with
Internal Smart Card Reader
P/N - CP722B White
P/N - CP732B Black

External
Smart Card Reader
P/N - PR116B White
P/N - PR115B Black

Internal
Smart Card Reader
P/N - PR114B White
P/N - PR113B Black

PROX CREDENTIALS AND LAN READERS

P/N - PR250
ISO Prox Card

P/N - PR260
Clam Shell Prox Card

P/N - PR200
Prox Token

P/N - PR201
Prox Token with Keyring

Graphic Keypad with
Built-In Prox Reader
P/N - CP701B White
P/N - CP711B Black

External Prox Reader
P/N - PR112B White
P/N - PR111B Black


Internal Prox Reader
P/N - PR110B White
P/N - PR109B Black

Up to 8 zone expanders of any type can be connected to the system. When using Single or Alarm & Tamper EOL, the CM707B can be installed to provide 16 zones on the CM705B Expander. The CM707B cannot be installed when using split EOL monitoring.

Max panel zone count configuration is:
Single EOL = 136
Alarm & Tamper = 136
Split EOL = 144

- = Encrypted RS485 LAN
- = ISOLATED Encrypted RS485 LAN
- = Programmable Serial Input


The CM723B and CM724B can be easily installed inside the CM350, CM720B and CM730B enclosures.

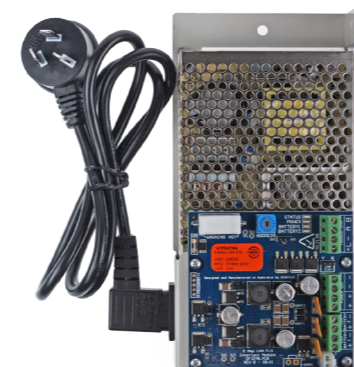

P/N - CM723B
LAN 5 Amp P/S Module
With Dual Battery Chargers



Up to 8 LAN Isolator modules can be connected. Isolators provide electrical isolation between LAN segments reducing the chance of surge damage. Isolators can also be used to increase the total LAN length.



x8



P/N - CM704B
8/16 LAN Zone
Expander

x8



P/N - CM707B
8 Zone Piggy
Back Expander

x8

P/N - CM705B
8/16 Universal LAN Zone
Expander with Cabinet


P/N - CM705PB
8/16 Universal LAN Zone
Expander PWA Only

x1

P/N - CM760B
Real Time Clock Module

Wiegand to LAN Interface
can support 3rd party
readers up to 40 bits.

x8



P/N - CM796B
Wiegand to DF RS485
LAN Interface Module


P/N - PR100B
External Wiegand Reader
(Not Smart Card Compatible)




P/N - CM900B
Direct Link Interface



P/N - CM444B
Slim Style Relay Card
Form C - 2 Amp



P/N - CM435B
Power Terminal
Expander Module



P/N - CM940B
6 Way Programmable Relay Card
Can be separated into single relay cards.



P/N - CM255B
Panel Default Unlock Key
Will reset Installer PIN and RAS
PIN on Solution 6000 panels.



P/N - CM436B
Desktop Prox Card / Token Reader
For use with Solutionlink and Site
Manager Software packages.

Panels, modules and keypads with Orange product labels or serial number labels are running Digiflex's proprietary RS485 LAN system.

They are not compatible with older modules carrying white product labels with the exception of the CM195 which is not a LAN module.

