

Any one of the IP modules shown on the right can be installed. IP via WiFi is available when the WiFi keypad is used.

P/N - CM743B
Plug On GSM/
GPRS Module




P/N - CM365B
IP Communications Module
2G GSM/GPRS/SMS/Ethernet



P/N - CM751B
Plug On Ethernet
IP Module



P/N - CM101B
Interactive Voice
Control Module



x1

x1



P/N - CC610B
Solution 6000 Security
Controller with Enclosure

Panel supports direct
RX connection or via
CM195.

1 x RF3212E Receiver
Directly Connected

P/N - CM195
Multi RF Receiver
Interface




RF3212E

RF3212E

RF3212E

P/N - CM710B
4 Way LAN Relay
Output Expander
Module



x8

P/N - CM720B
1AMP LAN Power
Supply & Battery
Charger Module



x8


P/N - CP050B
Night Arming
Station



P/N - CP151B
Slim Style
External Keypad



Graphic Keypad
P/N - CP700B White
P/N - CP710B Black



Up to 16 keypad devices of any
type can be installed on the
Solution 6000 panel.

This includes Keypads, Readers
and Wiegand to LAN Interfaces.



Fingerprint Reader
P/N - CM729B White
P/N - CM728B Black



P/N - CP150B
External Keypad



WiFi



Graphic Keypad With WiFi
P/N - CP740B White
P/N - CP743B Black

SMART CARD CREDENTIALS AND LAN READERS

P/N - PR365
Adhesive Smart Card Sticker



P/N - PR301
Smart Card Token with Keyring



P/N - PR350
ISO Smart Card

Graphic Keypad with
Internal Smart Card Reader
P/N - CP722B White
P/N - CP732B Black

External
Smart Card Reader
P/N - PR116B White
P/N - PR115B Black

Internal
Smart Card Reader
P/N - PR114B White
P/N - PR113B Black

PROX CREDENTIALS AND LAN READERS

P/N - PR250
ISO Prox Card



P/N - PR260
Clam Shell Prox Card



P/N - PR201
Prox Token
with Keyring

P/N - PR200
Prox Token



Graphic Keypad with
Built-In Prox Reader
P/N - CP701B White
P/N - CP711B Black

External Prox Reader
P/N - PR112B White
P/N - PR111B Black

Internal Prox Reader
P/N - PR110B White
P/N - PR109B Black

Up to 8 zone expanders of any type can be
connected to the system. When using Single
or Alarm & Tamper EOL, the CM707B can be
installed to provide 16 zones on the CM705B
Expander. The CM707B cannot be installed
when using split EOL monitoring.

Max panel zone count configuration is:
Single EOL = 136
Alarm & Tamper = 136
Split EOL = 144

■ = Encrypted RS485 LAN
■ = ISOLATED Encrypted RS485 LAN
■ = Programmable Serial Input

P/N - CM797B
LAN Isolator
Module



x8

Up to 8 LAN Isolator modules can be connected
Isolators provide electrical isolation between LAN
segments reducing the chance of surge damage.
Isolators can also be used to increase the total LAN
length.

P/N - CM704B
8/16 LAN Zone
Expander



x8


P/N - CM707B
8 Zone Piggy
Back Expander



x8

P/N - CM705B
8/16 Universal LAN Zone
Expander with Cabinet

P/N - CM705PB
8/16 Universal LAN Zone
Expander PWA Only



P/N - CM796B
Wiegand to DF RS485
LAN Interface Module

x8

x1

P/N - CM760B
Real Time Clock Module



Wiegand to LAN Interface
can support 3rd party
readers up to 40 bits.


P/N - PR100B
External Wiegand Reader
(Not Smart Card Compatible)



The CM723B and CM724B can
be easily installed inside the
CM350, CM720B and CM730B
enclosures.



P/N - CM723B
LAN 5 Amp P/S Module
With Dual Battery Chargers

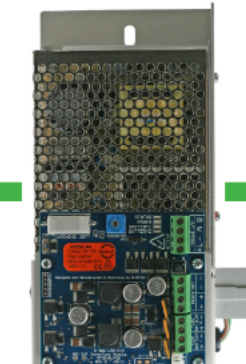


P/N - CM724B
LAN 5 Amp P/S Module
With Dual Battery Chargers
Export Model




P/N - CM900B
Direct Link Interface



P/N - CM444B
Slim Style Relay Card
Form C - 2 Amp



P/N - CM435B
Power Terminal
Expander Module



P/N - CM940B
6 Way Programmable Relay Card
Can be separated into single relay
cards.



P/N - CM255B
Panel Default Unlock Key
Will reset Installer PIN and RAS
PIN on Solution 6000 panels.



P/N - CM436B
Desktop Prox Card / Token Reader
For use with Solutionlink and Site
Manager Software packages.

Panels, modules and keypads
with Orange product labels or
serial number labels are running
Digiflex's proprietary RS485 LAN
system.

They are not compatible with
older modules carrying white
product labels with the excep-
tion of the CM195 which is not a
LAN module.

