



RADUM SECURITY COMPOSITE CABLE

DESCRIPTION:

Composite of 4 Core 14/0.20, 6 Core 14/0.20, 6 Core Shielded Data, and Figure 8 24/0.20 Cables.
Stock Code: BCCOMPRAD6C-150

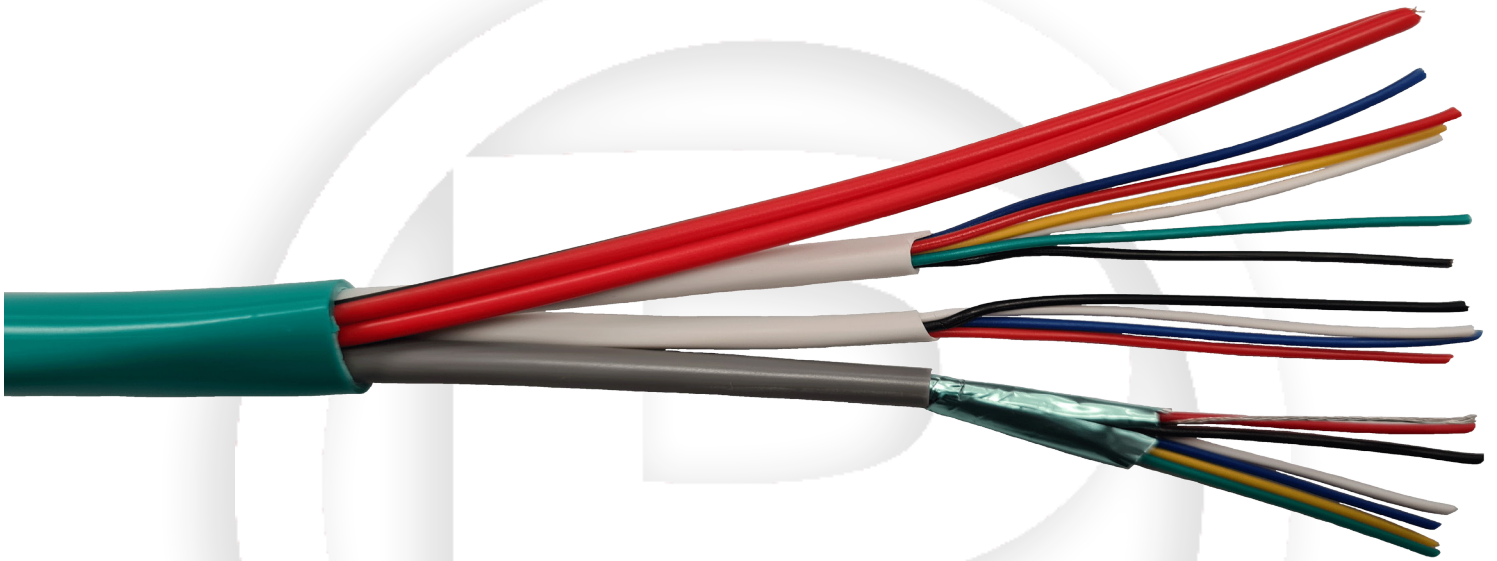

CONSTRUCTION

Overall Diameter	12.6 ~ 12.9mm
Overall Jacket	V75 PVC
Jacket Colour	Green
Members	1 x 4 Core 14/0.20 White Cable 1 x 6 Core 14/0.20 White Cable 1 x 6 Core (2 x 14/0.20 + 4 x 7/0.20) Grey Data Cable 1 x Figure 8 24/0.20 Red/Black Cable
Printing	WWW.RADUM.COM.AU Composite Cable 
Packaging	150m Wooden Drum in Carton
Dimension	42 x 42 x 36cm - 22kg

4 CORE 14/0.20 SECURITY CABLE

Description	4 Core Security / Automotive / Control Cable
Conductor	14 Strands x 0.20mm
Conductor Insulation	PVC
Conductor Colours	White, Blue, Red, Black
Jacket	PVC
Jacket Colour	White
Use	This cable is for Low Voltage use only
Jacket O/D	4.5 mm
Printing	Black Printing on the White Sheath Printing to be repeated at approximately 0.05m intervals WWW.RADUM.COM.AU RADUM 4 CORE 14/0.20mm SECURITY CABLE N11251

6 CORE 14/0.20 SECURITY CABLE

Description	6 Core Security / Automotive / Control Cable
Conductor	14 Strands x 0.20mm
Conductor Insulation	PVC
Conductor Colours	White, Blue, Red, Black, Green, Yellow
Jacket	PVC
Jacket Colour	White
Use	This cable is for Low Voltage use only
Jacket O/D	6.0 mm
Printing	Black Printing on the White Sheath Printing to be repeated at approximately 0.05m intervals WWW.RADUM.COM.AU RADUM 6 CORE 14/0.20mm SECURITY CABLE N11251

6 CORE OVER ALL SCREENED DATA CABLE

Description	For connecting Serial RS 232 & 4-20Ma loop circuit DATA terminal and communication equipment in a limited distance and unbalanced mode
Conductor	2 x 14 Strands x 0.20mm + 4 x 7 Strands x 0.20mm
Insulation	80 Degree Centigrade 300 Volt Polypropylene
Conductor Colours	Blue, Yellow, Red, Green, Black, White
Shielding	Aluminium Polyester Laminate Foil Tape
Drain Wire	7 Strands x 0.20mm
Jacket	PVC
Jacket Colour	Grey
Use	This cable is for Low Voltage use only
Jacket O/D	6.5 mm
Printing	Black Printing on the Grey Sheath Printing to be repeated at approximately 0.05m intervals WWW.RADUM.COM.AU RADUM 6 CORE SHIELDED DATA CABLE N11251

FIGURE 8 2 x 24/0.20 CABLE

Description	Parallel Webbed 24/0.20mm PVC Sheathed wires
Conductor	24 Strands x 0.20mm
Nominal Area	0.75 square mm
Amp Rating	7.5 Amps
Insulation Thickness	0.3mm (240 Volts)
Nominal O/D	2.40 x 5.40mm
Conductor Sheath	V75 PVC
Colours and Trace	Red / Black
Printing	Black Printing on the Grey Sheath Printing to be repeated at approximately 0.05m intervals WWW.RADUM.COM.AU RADUM 24/0.20 F8 CABLE N11251