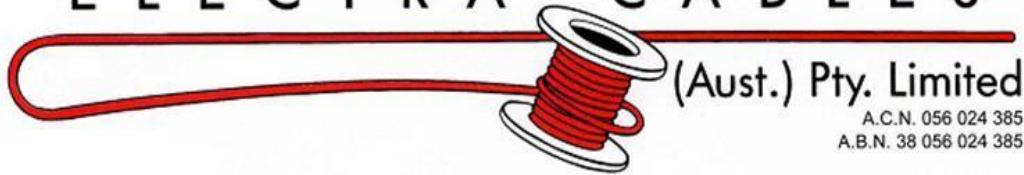


ELECTRA CABLES

**Head Office:**

1/13 Cooper St. Smithfield NSW 2164
P.O. Box 2084, Smithfield NSW 2164
Tel: (02) 8786 5200
Fax: (02) 8786 5288

Victoria Branch:

460-464 Hammond Rd.
Dandenong South, VIC 3175
Tel: (03) 9706 6819
Fax: (03) 9768 3580

Queensland Branch:

118 Sandstone Place
Parkinson, QLD 4115
Tel: (07) 3271 6600
Fax: (07) 3809 0411

Western Australia Branch:

24 Harrison Rd.
Forrestfield, WA 6058
Tel: (08) 9454 2628
Fax: (08) 9454 3026

Individually Screened Multi Pair Instrumentation Cable

Application: Internal and external inter-connections of electronic apparatus such as computers, intercoms, telemetering, signaling and alarm systems.

Conductor: Tinned Copper wire (AS/NZS1125)

7/0.25mm

Insulation: LDPE Red&BLK and White&Light Blue pair twist

Insulation Thickness: 0.2mm

Individually Screened: Aluminum tape screen, polyester mylar tape lapping and 7/0.2mm tinned copper drain wire.

Sheath: HR-70 Grey

NO.	Electra Cables Part No.	No. of Triple x Cross-section mm ²	Sheath thickness mm	Overdiameter ±10% mm	Approx. mass kg/km
1	EIS72502PPE	2 x 0.34	0.5	4.8	29



Note: Other types or other lengths of the above cables can be manufactured according to customers' specifications.

Quality ISO 9001
Certified System