



RADUM 2 PAIR 7/0.25 INDIVIDUAL SCREENED DATA CABLE

CONSTRUCTION	
Type	2 Pair 7/0.25 Individual Screened Data Cable
Conductor	Stranded 22 AWG 7 Strands x 0.25mm Tinned Copper
Insulation	0.26mm 75°C Polypropylene
1st Pair	Red & Black
2nd Pair Colours	White & Green
Pair Shielding	Individual Aluminium Polyester Laminate Tape
Construction	Pairs cabled on common axis to reduce diameter
Drain Wire	7 strands x 0.25mm Tinned Copper
Jacket	Fire Retardant PVC Non Migrating
Jacket Colour	Grey
Jacket O/D	4.27mm
Impedance	45 Ohm
Insulation Resistance	100 mega ohms between shields
Working Voltage	50 Volts between adjacent shields

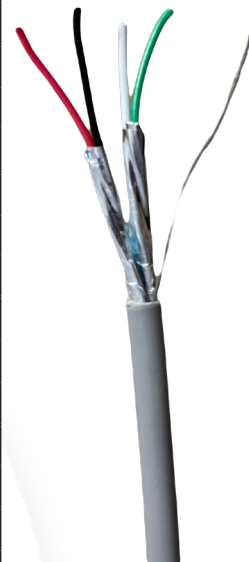

Printing	Black Printing on the Grey Sheath Printing to be repeated at approximately 0.05m intervals WWW.RADUM.COM.AU RADUM 2P INDI SCREENED DATA CABLE N11251		
Shipping Mark	RADUM in a triangle <div style="text-align: center;">  </div>		
Packing	Note: The Diameter of the Centre hole in the drum MUST be at least 30mm or the shipment will be rejected 100m Drum (4 by 100m drum per cardboard box) 300m Drum (2 by 300m drum per cardboard box) 500m Drum (1 by 500m drum per cardboard box)		
Labelling	On the outside of each drum flange		
	On the 100m Drum BCP27025-100 RADUM 2 Pair Individual Screened Data Cable N11251 Length - 100m	On the 300m Drum BCP27025-300 RADUM 2 Pair Individual Screened Data Cable N11251 Length - 500m	On the 500m Drum BCP27025-500 RADUM 2 Pair Individual Screened Data Cable N11251 Length - 500m
	On the outside of each packing box		
	On the 100m Drum BCP27025-500 RADUM 2 Pair Individual Screened Data Cable N11251 Quantity: 4 x 100m	On the 300m Drum BCP27025-300 RADUM 2 Pair Individual Screened Data Cable N11251 Quantity: 2 x 300m	On the 500m Drum BCP27025-500 RADUM 2 Pair Individual Screened Data Cable N11251 Quantity: 1 x 500m