

DHI-VTH1550CHM-BLK (DAHI1015)

IP Indoor Monitor



Features

- 7" TFT Capacitive touch screen
- IPC surveillance
- Alarm integration
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)



Technical Specification

| | |
|-------|-------------------------------|
| Model | DHI-VTH1550CHM-BLK (DAHI1015) |
|-------|-------------------------------|

System

| | |
|----------------|--------------------------|
| Main Processor | Embedded Micro Processor |
|----------------|--------------------------|

| | |
|------------------|-------------------|
| Operation System | Embedded LINUX OS |
|------------------|-------------------|

Video

| | |
|-------------------|-------|
| Video Compression | H.264 |
|-------------------|-------|

Audio

| | |
|-------------------|-------|
| Audio Compression | G.711 |
|-------------------|-------|

| | |
|-------------|--------------------------|
| Audio Input | All-direction Microphone |
|-------------|--------------------------|

| | |
|--------------|----------------------|
| Audio Output | Built-in Loudspeaker |
|--------------|----------------------|

| | |
|--------------------|-------------------------------------|
| Bidirectional Talk | Support Dual-way Bidirectional talk |
|--------------------|-------------------------------------|

Display

| | |
|------------|------------------------|
| LCD Screen | 7" 800x480, Capacitive |
|------------|------------------------|

Operation Mode

| | |
|-------|--------------|
| Input | Touch screen |
|-------|--------------|

Interface

| | |
|----------|---|
| Alarm In | 8 |
|----------|---|

| | |
|-------|---|
| RS485 | 1 |
|-------|---|

Network

| | |
|----------|---------------------------|
| Ethernet | 10M/100Mbps Self-adaptive |
|----------|---------------------------|


| | |
|------------------|--------|
| Network Protocol | TCP/IP |
|------------------|--------|

General


| | |
|-------------|--------------------|
| Memory Slot | Micro SD, Max 32GB |
|-------------|--------------------|

| Installation | Flush |
|---------------------|--------------------------------------|
| Power | DC 12V/ supply directly by VTNS1060A |
| Power Consumption | Standby ≤1.5W, Work ≤7W |
| Working Temperature | -10°C~+55°C |
| Relative Humidity | 10%~90%RH |
| Dimensions | 200.5mm×136.5mm×22.0mm |
| Weight | 1.0Kg |

Dimensions

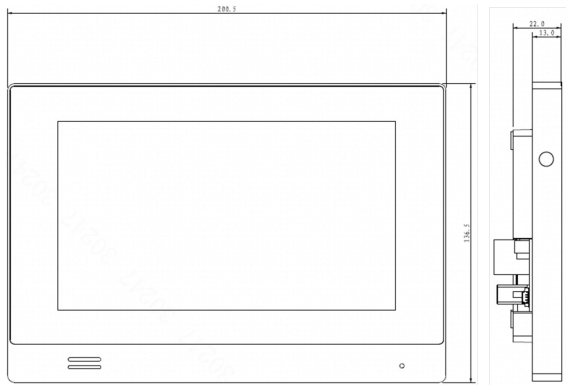

View Area

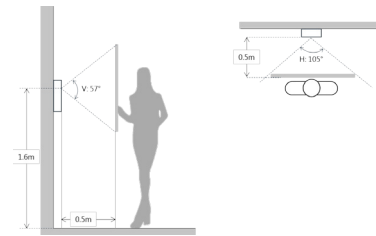

Application

