

GUARD doorstation mkII

For secure remote access entry.



features:

- ✓ telephone-line powered
- ✓ hands free operation
- ✓ loud speaker output > 78dBa/1metre
- ✓ auto dialling with alternate numbers
- ✓ multi-number dialling option *up to 3 buttons*
- ✓ push-to-talk option *for noisy environments*
- ✓ remote level control *speaker/microphone*
- ✓ remote relay activation *door release*
- ✓ remote programming facilities
- ✓ remote diagnostic testing
- ✓ self identification
- ✓ vandal resistant
- ✓ weathershield panel/enclosure *stainless steel*

versatile

easy to use

durable

dependable


The **Guard Doorstation** is a powerful all in one, interactive telephone unit that thinks for you. It offers security and control literally at your finger tips. Designed to fit any place you require a high quality, loud speaker, hands-free telephone. It is well suited for homes, hotels, hospitals and universities as well as many business and commercial settings. Guarding you against unwanted entry onto your property, this unit will give you the ability to authorise access to welcomed visitors without having to leave the comfort of your home or office. The **Guard**, *making sure your safety and well-being come first!*

easy to install:



Installation is made easy thanks to the line powered Guard, only a single pair of line wires are required for operation. The housing allows for trouble free mounting to just about any surface. Programming and setting up of the unit is flexible, either via a remote touch tone phone or using a local keypad (*if fitted*). Extremely simple instruction sets are used for quick setup.

easy to use:

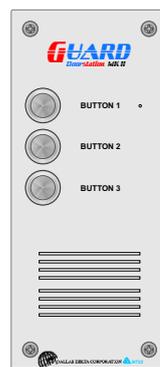

The Guard is an interactive telephone, while on line the remote operator can control certain features of the Guard by ways of keypad tones. The Guard's microphone and speaker level can be adjusted remotely as well as individually activating up to two separate relays. Multiple call buttons can be fitted on request.


GUARD doorstation mkII

specifications:

PSTN:	exchange line or analog PABX extension	24 - 50 volts @ 18 - 100mA
DTMF:	tone duration inter-digit pause	80 milli-seconds 80 milli-seconds
DIALLING:	digit capacity direct number call alternate number call	16 3 (optional) 2
RELAY:	switching maximum	0.5A @ 60Vdc / 40Vac SELV or TNV 2kV isolated voltage free contacts
SPL:	speaker output level	>78dBa @ 1 metre (onboard amplifier) 18 - 80mA >84dBa @ 1 metre (booster amplifier) ext. 12Vdc
PHYSICAL:	dimensions weight material button	226.0mm x 100.0mm x 45.0mm 700 grams stainless steel 304 non rusting stainless steel, water resistant
REN:		0.7

~ This unit must be installed by qualified personnel ~

enclosure:

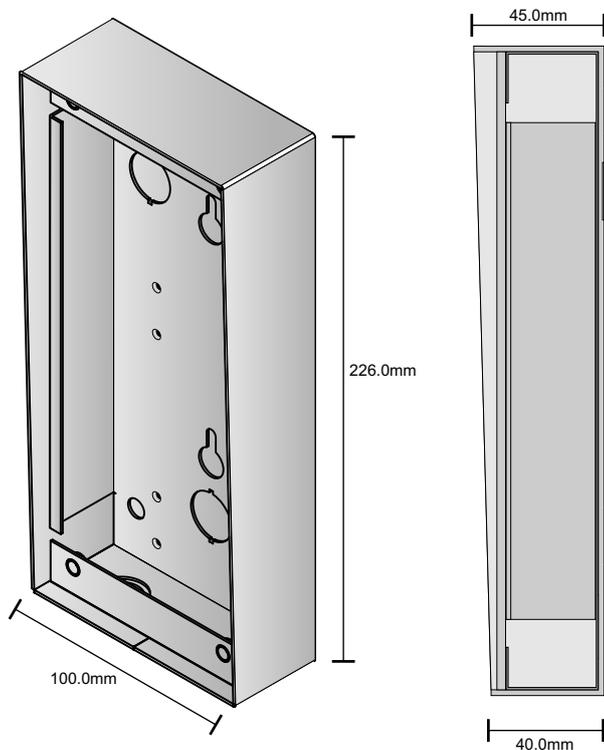

The Guard Doorstation mkII boasts a vandal resistant, robust stainless steel housing. This enclosure is slightly hooded at the top and offers weather-shielding for the toughest of environments. Mounting of your telephone can be easily made to just about any surface thanks to this versatile enclosure.

Dimensions:
226.0mm (height)
100.0mm (width)
45.0mm (depth)



designed and manufactured by:
dallas delta corporation pty. ltd.

The information contained on this product brochure is subject to change without notice.



complies with:
ACMA
EN60950
AS/NZS CISPR22
EN55022

All relevant Australian Communications & Media Authority Standards
European Safety Standard
EMI Australia/NewZealand Standard
EMI European Standard (CISPR22)



seadan 
security & electronics

You're in very secure company

VIC Unit 7, 170 Forster Road, Mt Waverley VIC 3149
NSW Unit 5, 142 James Ruse Drive, Parramatta NSW 2150
QLD 15-19 Hudson Road, Albion QLD 4010
WA Unit 4, 200 Balcatta Road, Balcatta WA 6021
ACT Unit 2, 157-161 Gladstone Street, Fyshwick ACT 2609

1300 366 851 | seadan@seadan.com.au

20170125