

DH-HAA110

Patch Cord

**Features**

- 3.5mm male plug to RCA male audio cable.


Technical Specifications

Model		DH-HAA110
Structure Parameter		
Conductor	AWG	28AWG(2C)
	Material	Tinned copper
	Size	7/0.127±0.008mm
Insulation	Min. average Thickness	0.20mm
	Material	PVC
	Inner Diameter	0.85±0.05mm
Spiral	Material	Tinned copper
	Size	45±3/0.10±0.008mm
	Coverage	70%
Jacket	Min. average Thickness	0.30m
	Material	PVC
	Color	White
	Outer Diameter	2.8±0.10mm

Audio Series | DH-HAA110

Length	125±0.50mm(4.92"±0.2"), 8g
Tensile strength	Jacket≥1500psi
Elongation	Jacket≥100%
Electrical Characteristics	
Rated Temperature	80°C
Rated Voltage	30V
Conductor Resistance	239Ω/km↓ at 20°C
Insulation Resistance	10MΩ/km↑ at 20°C
Dielectric Strength	AC 500V/1min at 20°C

Dimensions (mm/inch)

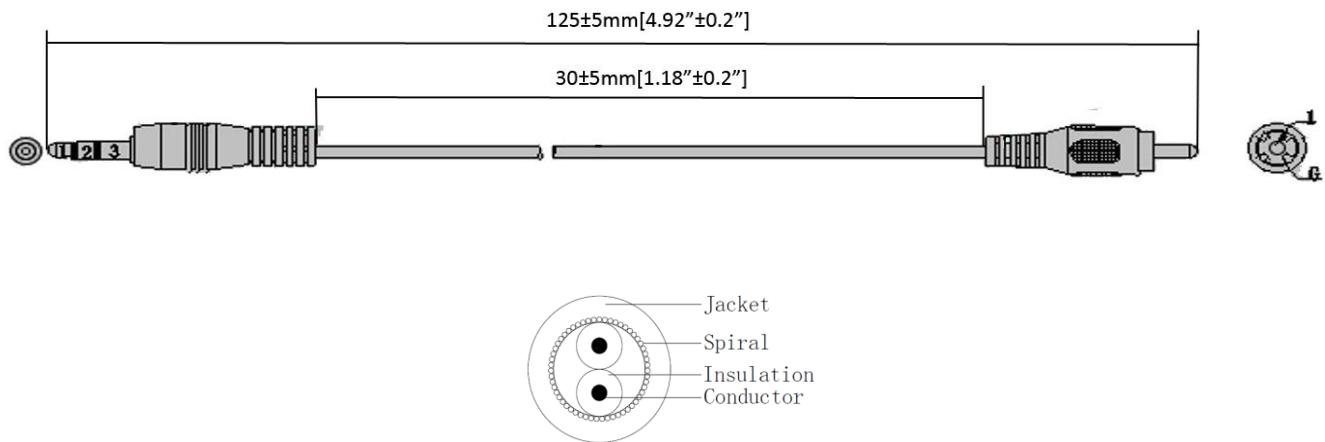

Package Information

- Patch cord *1