


# Gallagher SMB HBUS Boards

Gallagher SMB HBUS I/O Boards provide secure input and output device options for connecting third-party devices to Gallagher's security solution for small and medium business.

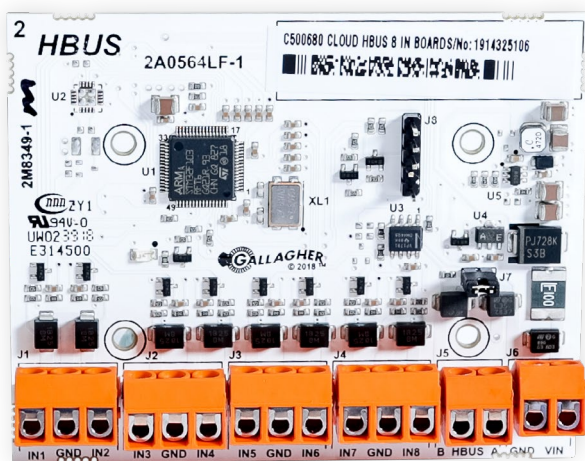

## Gallagher SMB HBUS I/O Boards include

- 8In Board
- 8In 4Out Board

The HBUS communications protocol is based on the RS485 standard and allows each HBUS I/O device to communicate with the Gallagher SMB Controller 6000 over a distance of up to 500 m (1640 ft) at a speed of 1 Mb/s.

The HBUS 16In 16Out Board can be utilized with the SMB Kit to expand the solution.

## Key features

- End of line resistance value can be assigned at the board level
- Multiple boards can be daisy chained together along the same cable run
- Unique identities for all field devices
- IT grade authentication and encryption levels to prevent data tampering

## Variable end of line resistance

Variable end of line resistance is supported for all Gallagher SMB HBUS I/O boards.

## Controlling inputs and outputs

Making no high level decisions, the Gallagher SMB HBUS I/O boards monitor the state of the balanced inputs and switches the output relays as instructed by the Gallagher SMB Controller 6000.

## Monitoring inputs

The inputs on Gallagher SMB HBUS I/O Devices are 4-state balanced inputs. The four states monitored are:

- Open
- Closed
- Short Circuit (Tamper)
- Open Circuit (Tamper)


Inputs may be used for monitoring:

- Access controlled doors
- Passive Infrared detectors (PIRs)
- Uncontrolled doors
- Equipment alarms
- Any other devices that provide a clean contact

## Activating outputs

Relays may be triggered by timers or with logic configuration used to:

- Unlock doors
- Activate sirens

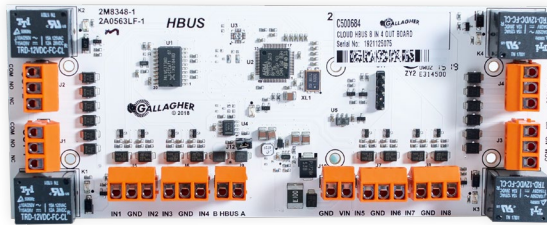

## LED indications

3 Flash (Red)	No communications with the controller
2 Flash (Red)	Communications with the controller, but board is not configured
1 Flash (Red)	Fully configured and functioning normally

## Technical Specification

8In Board	
Product number	C500680
Voltage	13.6 Vdc +/- 15%
Fuse	Onboard 1 A resettable polyfused
Current	50 mA (all inputs terminated with 4k7 resistors)
Power rating	0.68 W
Temperature range	-10 °C to +50 °C (+14 °F to +122 °F)
Humidity	95% non condensing <sup>1</sup>
Inputs	8 (format = 4 state monitoring)
HBUS ports	1 (format = RS485 balanced)
Dimensions	Height with terminal blocks 30 mm (1.2 ") Depth 70 mm (2.8 ") Width 87 mm (3.4 ")

8In 4Out Board	
Product number	C500684
Voltage	13.6 Vdc +/- 15%
Fuse	Onboard 1 A resettable polyfused
Current	45 mA (relays off) 200 mA (relays on)
Power rating	0.61 W (relays off) 2.72 W (relays on)
Temperature range	-10 °C to +50 °C (+14 °F to +122 °F)
Humidity	95% non condensing <sup>1</sup>
Inputs	8 (format = 4 state monitoring)
Output relays	4 (format = 24 Vdc/ac, 3 A resistive, 1 A inductive)
HBUS ports	1 (format = RS485 balanced)
Dimensions	Height with terminal blocks 30 mm (1.2 ") Depth 180 mm (7.1 ") Width 70 mm (2.8 ")

16In 16Out Board	
Product number	C300688
Voltage	13.6 Vdc +/- 15%
Fuse	Onboard 2 A resettable polyfused
Current	73 mA (relays off) 674 mA (relays on)
Power rating	0.99 W (relays off) 9.17 W (relays on)
Temperature range	-10 °C to +50 °C (+14 °F to +122 °F)
Humidity	95% non condensing <sup>1</sup>
Inputs	16 (format = 4 state monitoring)
Output relays	16 (format = 24 Vdc/ac, 3 A resistive, 1 A inductive)
HBUS ports	1 (format = RS485 balanced)
Dimensions	Height with terminal blocks 30 mm (1.2 ") with connectors Depth 180 mm (7.1 ") Width 180 mm (7.1 ")

<sup>1</sup> Gallagher modules are UL humidity tested and certified to 85% and have been independently verified to 95%.

### Gallagher World Headquarters

181 Kahikatea Drive, Melville, Hamilton 3204  
New Zealand

Phone +64 7 838 9800

Email [smb@security.gallagher.com](mailto:smb@security.gallagher.com)



### Disclaimer

Please note that information contained in this document is intended for general information only. While every effort has been taken to ensure accuracy as at the date of the document, there may be errors or inaccuracies and specific details may be subject to change without notice. Copyright © Gallagher Group Limited.