


## ST245SL Electric Strike

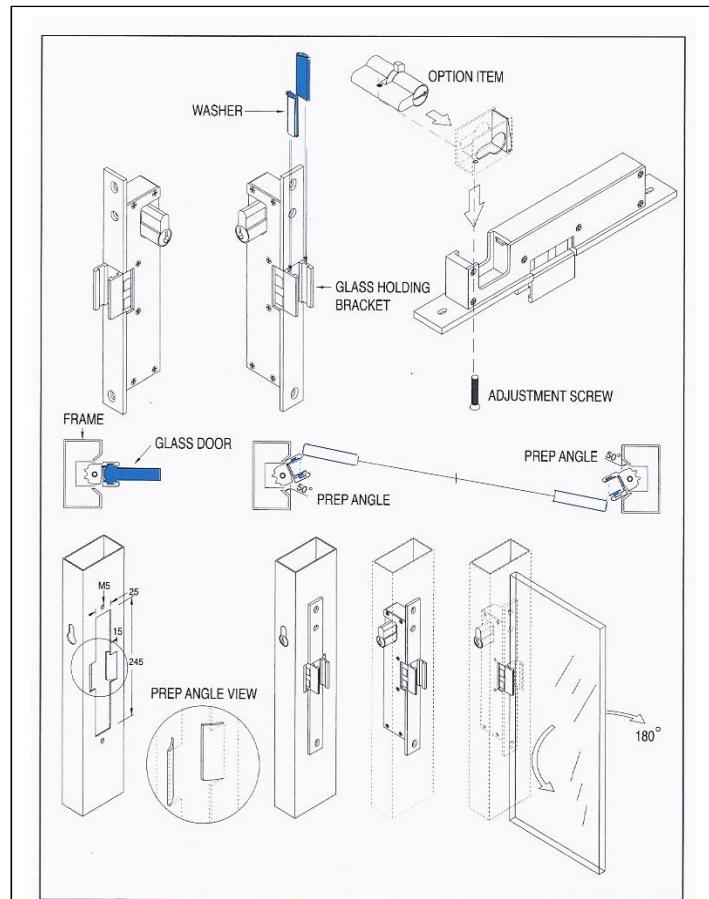

### Specifications

- Dimensions: L245 x W24 x D41mm
- Voltage: Dual 12VDC / 24VDC
- Power: 300mA / 12VDC, 150mA / 24VDC
- Dual mode: Fail safe / Fail secure field selectable
- Bi-directional locking function
- In fail secure mode, lock can be integrated with a mechanical lock which can be opened when there is a power shortage.
- Applicable to frameless glass doors only
- Glass thickness: 8 – 12mm
- Accepts euro profile cylinder (not supplied)

### Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original client. The Guardall policy is one of continual development and improvement, therefore Guardall reserves the right to change specifications without notice