


## ELECTRIC STRIKES - ST250 SERIES




ST250

- ST250 / SST250 : 250L\*25W\*31H mm

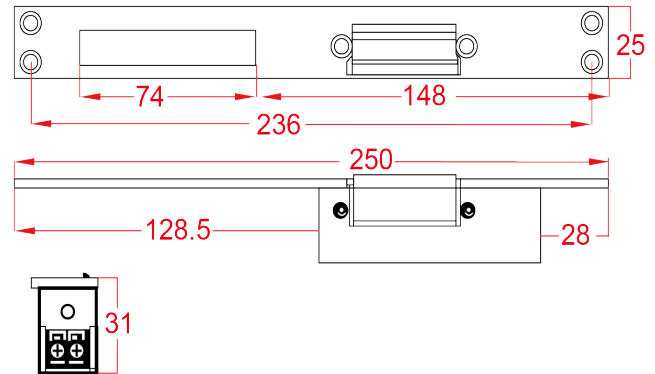

ELECTRIC STRIKES

### ▼ ORDERING INFORMATION

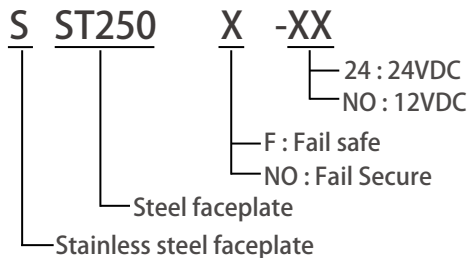

#### EXAMPLE :

- ST250 : Steel face plate fail secure 12VDC
- SST250 : Stainless steel face plate fail secure 12VDC
- ST250F : Steel face plate fail safe 12VDC
- SST250F-24 : Stainless steel faceplate fail safe 24VDC

### ▼ SPECIFICATION

- Steel Faceplate : 250L\*25W\*3T mm
- Stainless Faceplate : 250L\*25W\*3T mm
- Door Latch : 3/8"(9.5mm)
- Keeper Depth : 9.6 mm
- Fail secure : 12VDC / 400mA
- Fail secure : 24VDC / 200mA (Specify on order)
- Fail safe : 12VDC / 200mA
- Fail safe : 24VDC / 100mA (Specify on order)

### ▼ APPLICATION

