


V90-7924 Viro electric gate lock



- Installation: vertical or horizontal
- Backset: 70 mm
- Functions:
 - service (standard): the lock opens with the electric impulse and only resets once the door/gate has been opened and then closed. It is therefore suitable for use with door closers and/or all types of automation systems.
 - security (selected by manually removing an internal part): the lock opens only when electric impulse and manual or automatic pressure are applied simultaneously. It is therefore not advisable to use it with a door closer and/or unsuitable automation systems.
- Double replaceable coil: which distributes the load uniformly and ensures a long working life
- Voltage: standard 12V AC
- Case: one-piece galvanized steel
- Cover with handle: galvanized steel
- Striker: galvanized steel, to ensure the correct working of the lock even if there is vertical adjustment between the lock and the striker (caused by weather changes)

- **Cylinder:**
 - solid brass, fixed internal, fixed external. Keys: supplied with 3 Viro profile nickel-plated brass keys.
- **Mechanism** (version with round cylinder):
 - brass pins;
 - mushroom brass counter pins, pick-resistant;
 - phosphor bronze pin springs.
- **Supplied with:** galvanized steel striker for horizontal installation [for vertical installation, order the specific galvanized steel floor striker], galvanized steel roof-plate for horizontal installation and fixing screws.

Dimensions

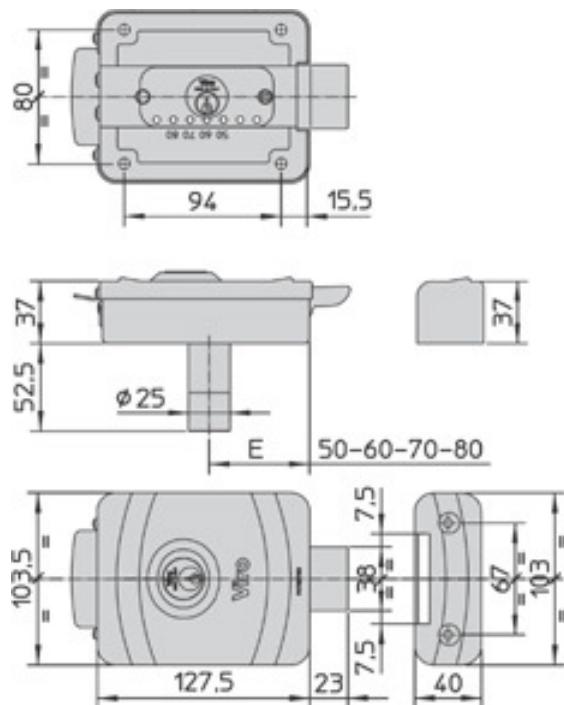

Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original client. The Guardall policy is one of continual development and improvement, therefore Guardall reserves the right to change specifications without notice