

# Resettable Call Points


## CP-32/33 Series

Patented, Safe, Visible, Easy to Install



CP-32G

CP-32G-LB

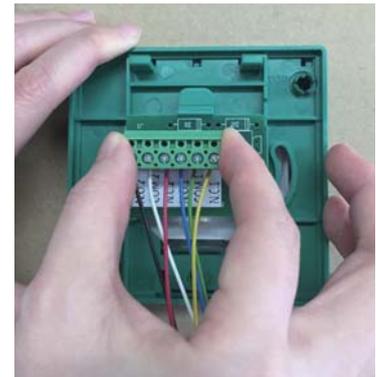

Detachable Terminal Blocks for CP-33 Series

The GEM Resettable Call Point features a resettable operating element that produces no dangerous glass shards, making it suitable for use in high traffic areas, such as schools, shopping malls, or commercial buildings. The CP-33 series is designed with detachable terminal blocks allowing for easy and quick installation.

### Standard Features & Specifications

- Operating voltage: 12/24 VDC (Default 24VDC for CP-32GBZ-LB and other color models)
- Contact resistance: 100 mΩ
- Contact rating: 5A 125/250 VAC
- Resettable key included
- Choice of 5 colors (Green/Blue/Yellow/White/Red)
- Detachable terminal blocks for easy installation (For CP-33 series)
- Blue backlight (For CP-32G-LB/CP-32GBZ-LB/CP-33GBZ-LB and other color models)
- Built-in 80db buzzer (For CP-32GBZ-LB and other color models)

### Patents, Approvals, and Listings

- CE: 332113
- Patent: Taiwan-M444599




## CP-32/33 Series Resettable Call Points


Models	Contact	Blue Backlight	Built-in Buzzer	Case Colors
<b>CP-32G</b> <b>CP-33G</b>	Double pole	—	—	<u>Green</u> , <u>Red</u> , <u>Yellow</u> , <u>White</u> , <u>Blue</u>
<b>CP-32G-LB</b>	Double pole	●	—	<u>Green</u> , <u>Red</u> , <u>Yellow</u> , <u>White</u> , <u>Blue</u>
<b>CP-32GBZ-LB</b> <b>CP-33GBZ-LB</b>	Double pole	●	●	<u>Green</u> , <u>Red</u> , <u>Yellow</u> , <u>White</u> , <u>Blue</u>

## Dimensions

Backlit models such as CP-32G-LB, CP-32GBZLB, CP-33GBZ-LB shown as below

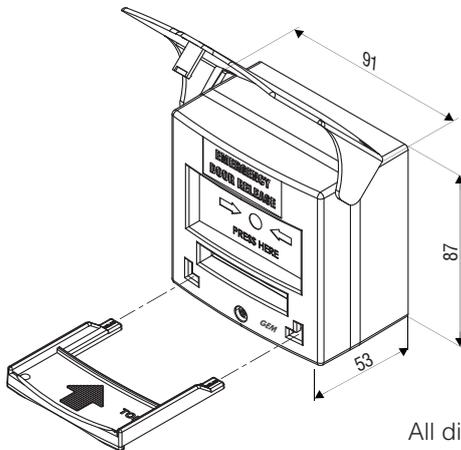

All dimensions in mm

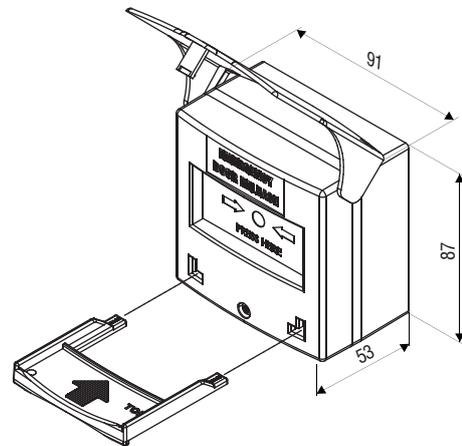

## Accessories


**P-PL-CP-32-K**  
Resettable key



**P-PL-CP-32-UC**  
Clear plastic cover



## CP-33 Series with Detachable Terminal Blocks

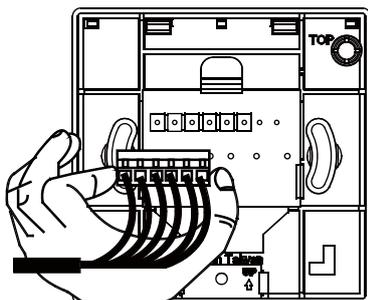

The CP-33 series with Detachable Terminal Blocks is designed with convenient terminal block concept for easy and quick installation. Simply wire the terminal connector and plug it in the back of the CP-33 product. No re-termination is required.

### Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original client. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.