

1. Technical Parameter

Max VESA: 600X400; Maximum load: 30kgs.

2. Parts List

Please check the parts in the package in comparison with the following list, make sure all of the parts are in the package. Never use defective parts, never replace part with different specification.



(A) M6x50 Self-tap Screw (4)

(B) 8x40 Plastic Anchor (4)

(C) Square Washer (4)

(D) 15mm Plastic Sleeve (4)




(E) M6x30 screws (4)

(F) M6x30 screws (4)

(G) Bubble Level (1)


3. Installation and operation instructions

Note: please read the instructions carefully before installation!

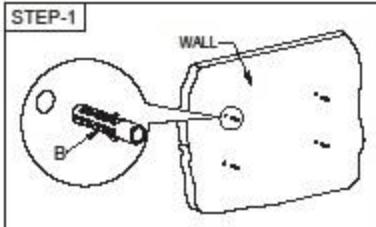



Step 1:

Use the wall plate as a template to drill four holes of dia. 8mm and 50mm depth in the wall. Then wedge four plastic anchors into the holes.

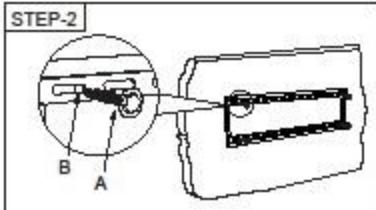


Step 2:

Install the wall plate. Put the wall plate on the wall, and then screw four self-tap screws into each plastic anchor through metal washer to fix the wall plate onto the wall.

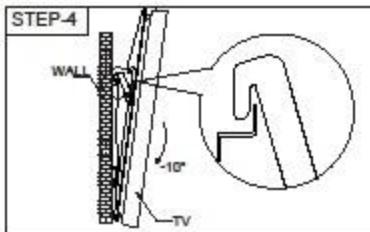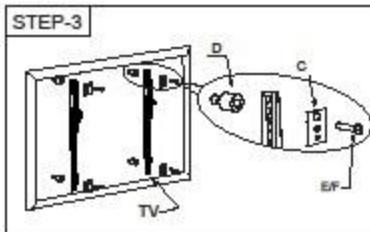

Step 3:

Install the bracket rail onto the back of the TV. Select suitable screws from the screw package according to the size of the holes in the back of TV. Fix the two hanging arms onto the back of TV by screws into the holes. Make sure equal height of the two hanging arms.

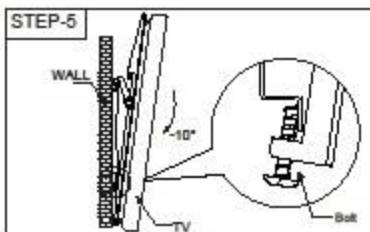

Step 5:

Tighten the screw of the two hanging arms to make sure the TV has been fixed firmly.