

Overview

HP Pro Mini 400 G9 Desktop PC




1. Type-C® SuperSpeed USB 20Gbps signaling rate port (charge support up to 5V/3A)
2. Type-A SuperSpeed USB 10Gbps signaling rate port
3. Type-A SuperSpeed USB 10Gbps signaling rate port (charge support up to 5V/1.5A)
4. Combo Audio Jack with CTIA and OMTP and headset support
5. Dual-state power button
6. Hard drive activity light

Not shown

- (2) M.2 (1 as M.2 2230 socket for WLAN/Bluetooth® and 1 as M.2 2280 socket for storage)
- (1) 2.5" internal storage drive bay

Overview

HP Pro Mini 400 G9 Desktop PC

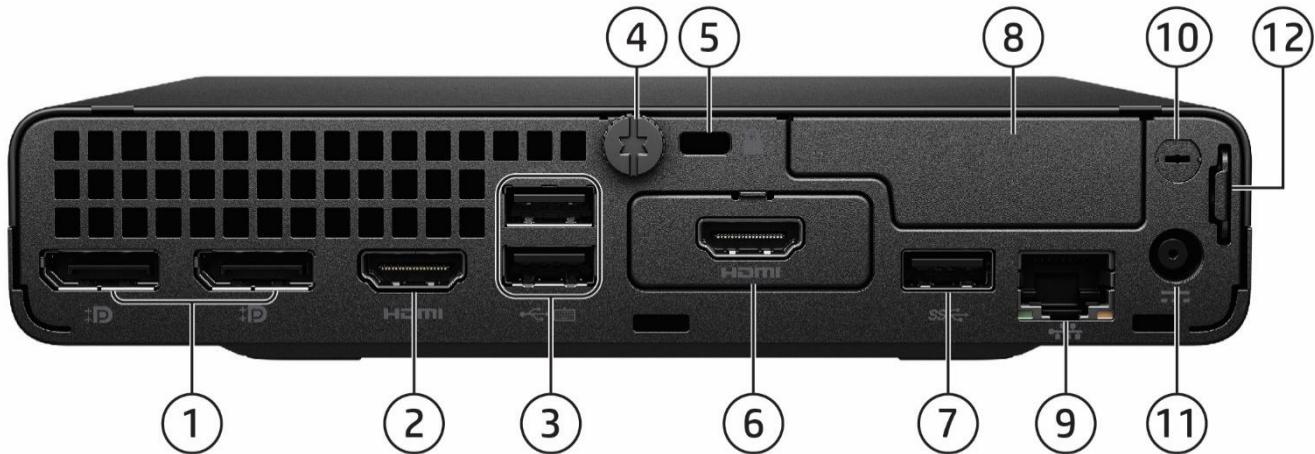

- 1. 2x Dual Mode DisplayPort™ 1.4a(DP++)
- 2. HDMI 2.1
- 3. 2x Type-A SuperSpeed USB 5Gbps signaling rate port (Supporting wake from S4/S5 with keyboard/mouse connected and enabled in BIOS)
- 4. Cover release thumbscrew
- 5. Standard cable lock slot (10 mm)
- 6. Flex Port 1, choice of:
 - DisplayPort™1.4a with HBR3
 - HDMI 2.1a
 - Type-C® SuperSpeed USB 10Gbps signaling rate port w/ DisplayPort™ Alt mode and power intake via Type-C® Power Delivery up to 100W
 - VGA
 - Serial¹
- 7. Type-A SuperSpeed USB 10Gbps signaling rate port
- 8. Flex Port 2², choice of:
 - 2x Type-A Hi-Speed USB 480Mbps signaling rate port
 - Serial
 - 2nd External Antenna
- 9. RJ45 network connector
- 10. External WLAN antenna opening²
- 11. Power connector
- 12. Retractable Padlock loop

Not shown

Slots

- (1) Internal M.2 2230 connector for WLAN
- (1) Internal M.2 SSD storage 2280 connector

Mounting

- Support for
 - Dual VESA Sleeve V4 Standalone
 - Quick Release Bracket
 - B200/B300/B500/B550/B560/B600 Mounting bracket
 - Integrated Work Center Stand
 - HP Single Monitor Arm

1. Sold separately or as an optional feature.

2. Must be configured at time of purchase.

Overview

HP Pro SFF 400 G9 Desktop PC



1. Slim optical drive (optional)
2. (1) Type-C® SuperSpeed USB 10Gbps signaling rate port (charge support up to 5V/3A)
3. (1) Type-A SuperSpeed USB 10Gbps signaling rate port (charge support up to 5V/0.9A)
4. (2) Type-A SuperSpeed USB 10Gbps signaling rate port (charge support up to 5V/0.9A)
5. SD card 4.0 reader (optional)
6. Combo Audio Jack with CTIA and OMTP and headset support
7. Dual-state power button
8. Hard drive activity light


Not shown

- (1) PCI Express x16
- (1) PCI Express x1
- (2) M.2 (1 as M.2 2230 socket for WLAN/Bluetooth®¹ and 1 as M.2 2280 socket for storage)

1. Must be configured at time of purchase.

Overview

HP Pro SFF 400 G9 Desktop PC

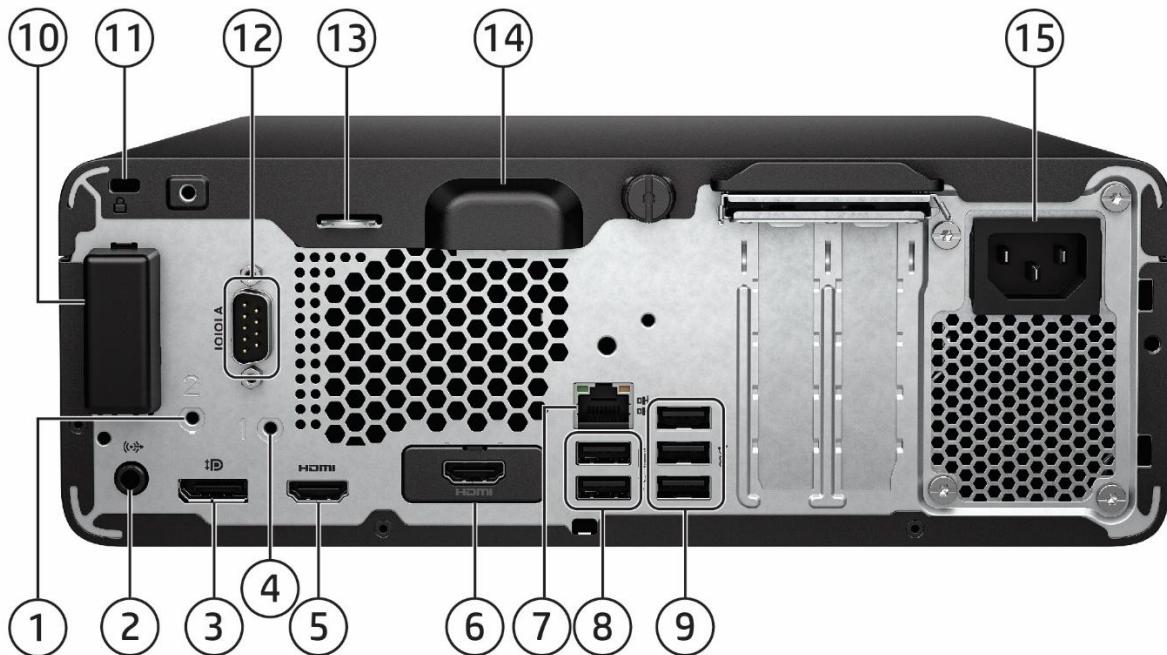

| | |
|---|---|
| 1. External antenna (optional) | 7. RJ45 network connector |
| 2. Audio line-in/line-out connector | 8. (2) Type-A Hi-Speed USB 480Mbps signaling rate port (Supporting wake from S4/S5 with keyboard/mouse connected and enabled in BIOS) |
| 3. Dual-Mode DisplayPort™ 1.4a (DP++) | 9. (3) Type-A SuperSpeed USB 5Gbps signaling rate port |
| 4. External antenna (option 1) | 10. Internal WLAN antenna cover (optional) |
| 5. HDMI 1.4b | 11. Standard cable lock slot |
| 6. Flex Port, choice of: | 12. Serial Port (Optional) |
| <ul style="list-style-type: none"> • DisplayPort™1.4a • VGA • HDMI 2.1 • Serial • Dual Type-A SuperSpeed USB 5Gbps signaling rate • Type-C® SuperSpeed USB 10Gbps signaling rate with DisplayPort™ Alt mode | 13. Padlock loop |
| | 14. Integrated accessory cable lock |
| | 15. Power cord connector |

Not shown

Port

Optional PS/2 (2 ports) & serial port card¹ (connected with mainboard via flyer cable)

Optional parallel port¹

Optional 4 Serial Port PCIe Card¹ (1 to 4 serial port dongle)


Bay

(1) 9.5mm internal optical drive bay
(1) 3.5" internal storage drive bay

1. Each of the legacy options will occupy one rear slot.

Overview

HP Pro Tower 400/480 G9 PCI Desktop PC

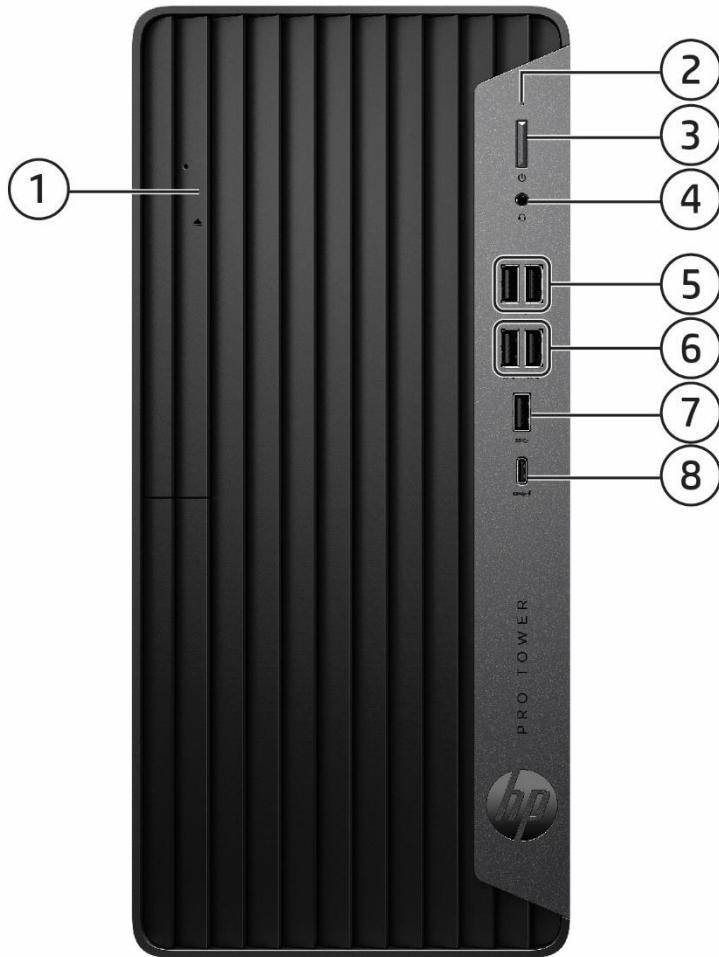

1. Slim optical drive (optional)
2. Hard drive activity light
3. Dual-state power button
4. Combo Audio Jack with CTIA and OMTP headset support
5. Front FlexIO Dual USB module (Option)
6. (2) Type-A SuperSpeed USB 10Gbps signaling rate port (charge support up to 5V/0.9A)
7. (1) Type-A SuperSpeed USB 10Gbps signaling rate port (charge support up to 5V/0.9A)
8. (1) Type-C® SuperSpeed USB 10Gbps signaling rate port (charge support up to 5V/3A)

Not shown


- PCI Express x16
- (1) PCI Express x1
- (1) PCI x1
- (2) M.2 (1 as M.2 2230 socket for WLAN/Bluetooth®/storage¹ and 1 as M.2 2280 socket for storage)

1. Optional

2. SD card and front flex port can only select one at the same time

Overview

HP Pro Tower 400/480 G9 PCI Desktop PC

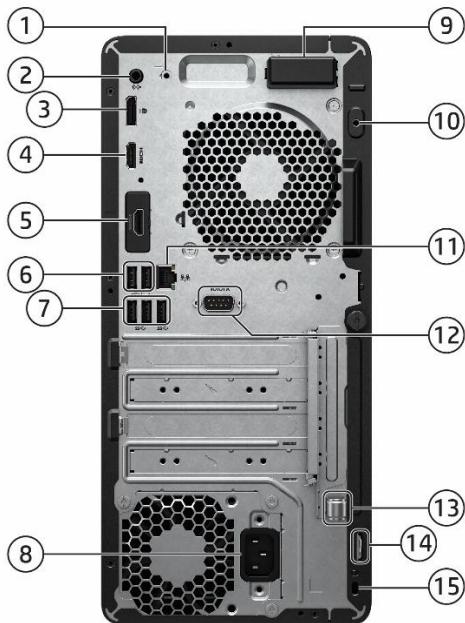

1. External WLAN antenna (select products only)
2. Audio line-in/line-out connector
3. Dual-Mode DisplayPort™ 1.4a (DP++)
4. HDMI 1.4b
5. Flex Port, choice of:
 - DisplayPort™ 1.4a
 - VGA
 - HDMI 2.1
 - Serial
 - Dual Type-A SuperSpeed USB 5Gbps signaling rate
 - Type-C® SuperSpeed USB 10Gbps signaling rate with DisplayPort™ Alt mode)
6. (2) Type-A Hi-Speed USB 480Mbps signaling rate (Supporting wake from S4/S5 with keyboard/mouse connected and enabled in BIOS)
7. (3) Type-A SuperSpeed USB 5Gbps signaling rate port
8. Power cord connector
9. Internal WLAN antenna cover (optional)
10. Internal WLAN antenna cover (optional)
11. RJ45 network connector
12. Serial port (optional)
13. Integrated keyboard/mouse wire hoop
14. Padlock loop
15. Standard cable lock slot

Not shown

Port

Optional PS/2 (2 ports) & serial port card (connected with mainboard via flyer cable)¹

Optional parallel port¹

Optional 4 Serial Port PCIe Card¹ (1 to 4 serial port dongle)

Bay

(1) 9.5mm internal optical drive bay
(2) 3.5" internal storage drive bay

¹ Each of the legacy options will occupy one rear slot


Overview

HP ProOne 440 23.8 inch G9 All-in-One Desktop PC (Touch/Non-Touch)




| | |
|--|--|
| 1. Pull-up webcam (optional) | 6. Power button |
| 2. Combo Audio Jack with CTIA and OMTP headset support | 7. Power activity light |
| 3. Speakers (optional) | 8. Type-C® SuperSpeed USB 10Gbps signaling rate port (charge support up to 5V/3A) |
| 4. SD media card reader (optional) | 9. Type-A SuperSpeed USB 10Gbps signaling rate port (charge support up to 5V/1.5A) |
| 5. On-screen display (OSD) buttons | |

5MP webcam with Temporal Noise Reduction (optional)

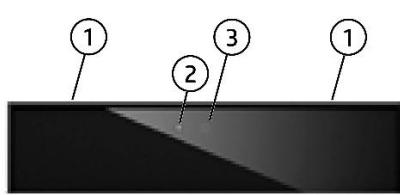

1. Dual microphones
2. Webcam light
3. 5MP webcam


5MP webcam with Temporal Noise Reduction + IR Sensor + Color Light Sensor (optional)

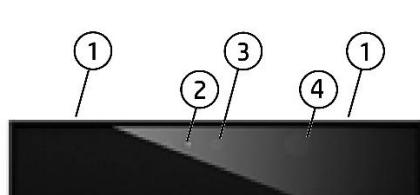

1. Dual microphones
2. Webcam light
3. IR/5MP/CLS webcam
4. IR light

Overview

HP ProOne 440 23.8 inch G9 All-in-One Desktop PC (Touch & Non-Touch)

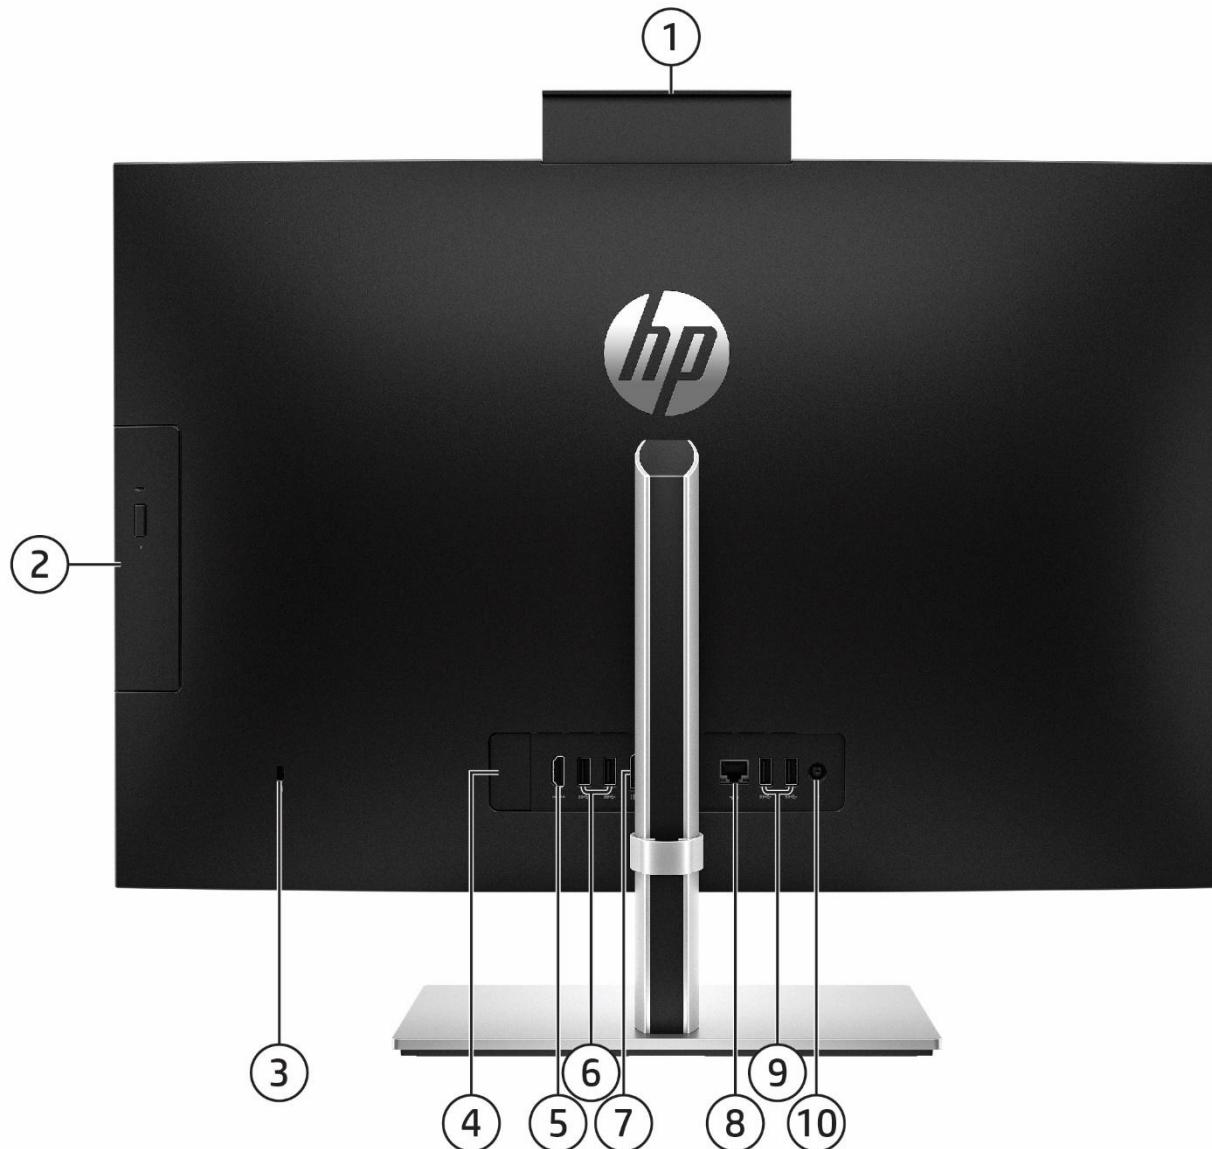

1. Pull-up webcam (optional)
2. Optical disc drive (optional)
3. Standard cable lock slot
4. Flex Port, choice of:
 - DisplayPort™ 1.4a
 - HDMI 2.1a
5. HDMI-in 1.4b
6. (2) Type-A SuperSpeed USB 5Gbps signaling rate port (Supporting wake in from S4/S5 with keyboard/mouse connected and enabled BIOS)
7. Dual-Mode DisplayPort™ 1.4 (DP++)
8. RJ45 network connector
9. (2) Type-A SuperSpeed USB 10Gbps signaling rate port
10. Power connector

1. Availability may vary by country

Overview

AT A GLANCE

- Choice of four form factors: Tower, Small Form Factor, Mini Desktop and All-in-One.
- Latest commercial class Intel® Q670 chipsets supporting Intel® Core™ 12th, 13th and latest 14th Generation processors, featuring both integrated Intel® UHD Graphics and optional discrete graphics.
- Choice of Windows 11 Professional, Windows 11 Home, and FreeDOS.
- Dust filter available for the following platforms (Mini Desktop, PC SFF and Tower)
- Hardware feature highlights:
 - All Form Factors:
 - Support up to 4 displays for UMA graphics configurations
 - Up to 64 GB DDR5 Memory, Max Speed up to 4800 MT/s (and up to 5600 MT/s on TWR and SFF) with selected Intel® Core™ 14th Gen i5 & i7 Processors.
 - Integrated 10/100/1000 Ethernet Controller, with optional Wi-Fi 6E, Wi-Fi 6 (802.11ax) and Wi-Fi 5 (802.11ac) and Bluetooth®.
 - TUV Ultra Low Noise Certification on selected configuration.
 - TWR/SFF:
 - Multiply video outputs via 2 standard video ports, optional Flex IO and discrete graphics.
 - Rear Flex IO choices of Serial, VGA, DisplayPort, HDMI & USB Type-C® with DisplayPort™ Output.
 - Total 9 USB ports including 8 USB-A and 1 USB Type-C®
 - Mini
 - Configurable FlexPort which provides the following choices: HDMI 2.1, Serial, VGA, DisplayPort™ 1.4a, or USB Type-C® with DisplayPort™ 1.4 with Power Delivery and Dual USB Type-A.
 - 2nd FlexPort available for configuration with the following ports: Serial, Dual USB Type-A, and 2nd external antenna.
 - Single cable scenario support when configured with FlexPort USB Type-C® with DisplayPort™ 1.4 with Power Delivery via selected HP monitors.
 - Total 10 USB ports including 9 USB-A and 1 USB Type-C® when configured with both FlexPorts in USB offering.
 - AiO:
 - Audio with HP Noise Cancellation Software, HP Dynamic Audio, and HP Sound Calibration.
 - Enhanced video conferencing experience with HP Auto Frame, HP Keystone Correction, Auto Camera Select, and Backlight/Lowlight Adjustments.
 - Multicamera software support of an additional webcam (optional) (sold separately).
 - HP Eye Ease TÜV Certified Integrated Low Blue Light panels.
 - Optional 23.8" FHD touchscreen with micro-edge bezel.
 - Optional 5MP pull-up camera with options for Temporal Noise Reduction, IR sensor, and Color Light sensor.
 - HDMI-in enabled Monitor Mode which disassociates panel from CPU for use as strictly display only.
 - Rear Flex IO choices of Serial, DisplayPort, HDMI & USB Type-C® with DisplayPort™ Output.
- Sustainability:
 - ENERGY STAR® certified. EPEAT® Climate+ registered where applicable.
 - High efficiency energy saving power supply and external power supply adapters.
 - Recycled metals, low halogen & ocean bound plastics used in materials.
 - 100% sustainably sourced and recyclable package
- TCO edge for AiO & TCO 9.0 for TWR/SFF/Mini. Software, Security & Manageability
 - Optional vPro Enterprise and Essentials

Overview

- HP Wolf Security for Business includes HP Sure Click and HP Sure Sense
- HP Tamper lock
- HP Connect
- HP BIOSphere
- Protected by HP Services, including limited warranty up to 1-1-1 (terms and conditions vary by country; certain restrictions and exclusions apply); Care Packs available with up to 5 years Next Business Day Onsite Hardware Support.
- Power consumption of Desktop Mini PC varies per configuration, for the best user experience, please connect PC power cord while using USB-C® cable via Super Speed USB Type-C® port in the rear side of the platform.
- Reduce clutter on Mini Desktop with single cable connection for power and video through USB Type-C® enabled displays with the optional USB- Type-C® port w/ DisplayPort Alt Mode and power intake via USB Type-C® Power Delivery up to 100W; reduce desktop footprint with the DM mounted behind a USB-C™ enabled display.

1. MIL-STD H testing is not intended to demonstrate fitness for U.S. Department of Defense contract requirements or for military use. Test results are not a guarantee of future performance under these test conditions. Accidental damage requires an optional HP Accidental Damage Protection Care Pack.

NOTE: See important legal disclosures for all listed specs in their respective features sections.

Standard Features and Configurable Components (availability may vary by country)

PRODUCT NAME

HP Pro Mini 400 G9 Desktop PC
HP Pro SFF 400 G9 Desktop PC
HP Pro Tower 400 G9 PCI Desktop PC
HP Pro Tower 480 G9 PCI Desktop PC
HP ProOne 440 23.8 inch G9 All-in-One Desktop PC

OPERATING SYSTEM

| | |
|---------------------|---|
| Preinstalled | Windows 11 Pro ¹ Windows 11 Pro Education ¹ Windows 11 Home - HP recommends Windows 11 Pro for business ¹ Windows 11 Home Single Language - HP recommends Windows 11 Pro for business ¹ Windows 11 Pro (Windows 11 Enterprise or Windows 10 Enterprise available with a Volume Licensing Agreement) ¹ FreeDOS |
|---------------------|---|

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows is automatically updated and enabled. High speed internet and Microsoft account required. ISP fees apply and additional requirements may apply over time for updates. See <http://www.windows.com>.

CHIPSET

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|-------------|-------------|------------|------------|------------|
| Intel® Q670 | X | X | X | X |

Standard Features and Configurable Components (availability may vary by country)

PROCESSORS

| Intel® 12 th Generation Core™ Processors | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|---|-------------|------------|------------|------------|
| Intel® Core™ i7-12700 Processor ¹ 65W 2.1 GHz base frequency Up to 4.9 GHz max. turbo frequency with Intel® Turbo Boost Technology ² 25 MB cache, 12 cores, 20 threads Intel® UHD Graphics 770 Supports Intel® vPro® Technology and Intel® Stable Image Platform Program (SIPP) ³ | | X | X | X |
| Intel® Core™ i7-12700T Processor ¹ 35W 1.4 GHz base frequency Up to 4.7 GHz max. turbo frequency with Intel® Turbo Boost Technology 3.0 ² 25 MB cache, 12 cores, 20 threads Intel® UHD Graphics 770 Supports Intel® vPro® Technology and Intel® Stable Image Platform Program (SIPP) ³ | X | | | X |
| Intel® Core™ i5-12600 Processor ¹ 65W 3.3 GHz base frequency Up to 4.8 GHz max. turbo frequency with Intel® Turbo Boost Technology ² 18 MB cache, 6 cores, 12 threads Intel® UHD Graphics 770 Supports Intel® vPro® Technology and Intel® Stable Image Platform Program (SIPP) ³ | | X | X | X |
| Intel® Core™ i5-12600T Processor ¹ 35W 2.1 GHz base frequency Up to 4.6 GHz max. turbo frequency with Single P-core turbo Technology 18 MB cache, 6 cores, 12 threads Intel® UHD Graphics 770 Supports Intel® vPro® Technology and Intel® Stable Image Platform Program (SIPP) ³ | X | | | X |

Standard Features and Configurable Components (availability may vary by country)

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|---|-------------|------------|------------|------------|
| <p>Intel® Core™ i5-12500 Processor¹ 65W 3.0 GHz base frequency Up to 4.6 GHz max. turbo frequency with Intel® Turbo Boost Technology² 18 MB cache, 6 cores, 12 threads Intel® UHD Graphics 770 Supports Intel® vPro® Technology and Intel® Stable Image Platform Program (SIPP)³</p> | | X | X | X |
| <p>Intel® Core™ i5-12500T Processor¹ 35W 2.0 GHz base frequency Up to 4.4 GHz max. turbo frequency with Single P-core Turbo Technology 18 MB cache, 6 cores, 12 threads Intel® UHD Graphics 770 Supports Intel® vPro® Technology and Intel® Stable Image Platform Program (SIPP)³</p> | X | | | X |
| <p>Intel® Core™ i5-12400 Processor¹ 65W 2.5 GHz base frequency Up to 4.4 GHz max. turbo frequency with Intel® Turbo Boost Technology² 18 MB cache, 6 cores, 12 threads Intel® UHD Graphics 730</p> | | X | X | X |
| <p>Intel® Core™ i5-12400T Processor¹ 35W 1.8 GHz base frequency Up to 4.2 GHz max. turbo frequency with Single P-core Turbo Technology 18 MB cache, 6 cores, 12 threads Intel® UHD Graphics 730</p> | X | | | X |
| <p>Intel® Core™ i3-12300 Processor¹ 60W 3.5 GHz base frequency Up to 4.4 GHz max. turbo frequency with Single P-Core technology 12 MB cache, 4 cores, 8 threads Intel® UHD Graphics 730</p> | | X | X | X |

Standard Features and Configurable Components (availability may vary by country)

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|---|-------------|------------|------------|------------|
| <p>Intel® Core™ i3-12300T Processor¹ 35W 2.3 GHz base frequency Up to 4.2 GHz max. turbo frequency with Single P-Core technology 12 MB cache, 4 cores, 8 threads Intel® UHD Graphics 730</p> | X | | | X |
| <p>Intel® Core™ i3-12100 Processor¹ 60W 3.3 GHz base frequency Up to 4.3 GHz max. turbo frequency with Intel® Turbo Boost Technology² 12 MB cache, 4 cores, 8 threads Intel® UHD Graphics 730</p> | | X | X | X |
| <p>Intel® Core™ i3-12100T Processor¹ 35W 2.2 GHz base frequency Up to 4.1 GHz max. turbo frequency with Single P-core Technology 12 MB cache, 4 cores, 8 threads Intel® UHD Graphics 730</p> | X | | | X |

Standard Features and Configurable Components (availability may vary by country)

Intel® Pentium® Processors

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|---|-------------|------------|------------|------------|
| Intel® Pentium® Gold G-7400 Processor ¹ 46W 3.7 GHz base frequency 6 MB cache, 2 cores, 4 threads Intel® UHD Graphics 710 | | X | X | X |
| Intel® Pentium® Gold G-7400T Processor ¹ 35W 3.1 GHz base frequency 6 MB cache, 2 cores, 4 threads Intel® UHD Graphics 710 | X | | | X |
| Intel® Celeron® 6900 Processor ¹ 46W 3.4 GHz base frequency 4 MB cache, 2 cores, 2 threads Intel® UHD Graphics 710 | | X | X | X |
| Intel® Celeron® 6900T Processor ¹ 35W 2.8 GHz base frequency 4 MB cache, 2 cores, 2 threads Intel® UHD Graphics 710 | X | | | X |

Standard Features and Configurable Components (availability may vary by country)

Intel® 13th Generation Core™ Processors

| | Mini | SFF | TWR | AiO |
|--|------|-----|-----|-----|
| Intel® Core™ i7-13700 processor with Intel® UHD Graphics 770 (P-core Max turbo frequency up to 5.1 GHz, up to 5.2 GHz with Intel® Turbo Boost Technology ¹ , 30 MB L3 cache, 16 cores) 65W ² . Supports Intel® vPro® Technology ³ | | X | X | X |
| Intel® Core™ i7-13700T Processor with Intel® UHD Graphics 770 (P-core Max turbo frequency up to 4.8 GHz, up to 4.9 GHz with Intel® Turbo Boost Technology ¹ , 30MB cache, 16 cores) 35W ² . Supports Intel® vPro® Technology ³ | X | | | X |
| Intel® Core™ i5-13600T processor with Intel® UHD Graphics 770 (P-core Max turbo frequency up to 4.8 GHz, 24 MB cache, 14 cores) 35W. Supports Intel® vPro® Technology | X | | | X |
| Intel® Core™ i5-13500 processor with Intel® UHD Graphics 770 (P-core Max turbo frequency up to 4.8 GHz, 24 MB cache, 14 cores) 65W ² . Supports Intel® vPro® Technology ³ | | X | X | X |
| Intel® Core™ i5-13500T processor with Intel® UHD Graphics 770 (P-core Max turbo frequency up to 4.6 GHz, 20 MB cache, 14 cores) 35W ² . Supports Intel® vPro® Technology ³ | X | | | X |
| Intel® Core™ i5-13400 processor with Intel® UHD Graphics 730 (P-core Max turbo frequency up to 4.6 GHz, 20 MB cache, 10 cores) 65W ² . | | | | X |
| Intel® Core™ i3-13100 processor with Intel® UHD Graphics 730 (P-core Max turbo frequency up to 4.5 GHz, 12 MB cache, 4 cores) 65W ² . | | X | X | X |
| Intel® Core™ i3-13100T processor with Intel® UHD Graphics 730 (P-core Max turbo frequency up to 4.2 GHz, 12 MB cache, 4 cores) 35W ² . | X | | | X |
| <p>1. Multi-core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.</p> <p>2. Intel® Turbo Boost technology requires a PC with a processor with Intel® Turbo Boost capability. Intel® Turbo Boost performance varies depending on hardware, software and overall system configuration. See www.intel.com/technology/turboboost for more information.</p> <p>3. Intel vPro® requires Windows 10 Pro 64 bit or higher, a vPro supported processor, vPro enabled chipset, vPro enabled wired LAN and/or Wi-Fi 6E WLAN and TPM 2.0. Some functionality requires additional 3rd party software in order to run. Features of vPro® Essentials and Enterprise vary. See http://intel.com/vpro.</p> | | | | |

Standard Features and Configurable Components (availability may vary by country)

| Intel® 14 th Generation Core™ Processors | Mini | SFF | TWR | AiO |
|---|------|-----|-----|-----|
| Intel® Core™ i7-14700 with Intel UHD Graphics 770 (1.5 GHz E-core base frequency, 2.1 GHz P-core base frequency, up to 4.2 GHz E-core Max Turbo frequency, up to 5.3 GHz P-core Max Turbo frequency, 33 MB L3 cache, 8 P-cores and 12 E-cores, 28 threads), supports Intel® vPro® Technology | | X | X | X |
| Intel® Core™ i7-14700T with Intel UHD Graphics 770 (0.9 GHz E-core base frequency, 1.3 GHz P-core base frequency, up to 3.7 GHz E-core Max Turbo frequency, up to 5.0 GHz P-core Max Turbo frequency, 33 MB L3 cache, 8 P-cores and 12 E-cores, 28 threads), supports Intel® vPro® Technology | X | | | X |
| Intel® Core™ i5-14500 with Intel UHD Graphics 770 (1.9 GHz E-core base frequency, 2.6 GHz P-core base frequency, up to 3.7 GHz E-core Max Turbo frequency, up to 5.0 GHz P-core Max Turbo frequency, 24 MB L3 cache, 6 P-cores and 8 E-cores, 20 threads), supports Intel® vPro® Technology | | X | X | X |
| Intel® Core™ i5-14500T with Intel UHD Graphics 770 (1.2 GHz E-core base frequency, 1.7 GHz P-core base frequency, up to 3.4 GHz E-core Max Turbo frequency, up to 4.8 GHz P-core Max Turbo frequency, 24 MB L3 cache, 6 P-cores and 8 E-cores, 20 threads), supports Intel® vPro® Technology | X | | | X |
| Intel® Core™ i5-14400 with Intel UHD Graphics 730 (1.8 GHz E-core base frequency, 2.5 GHz P-core base frequency, up to 3.5 GHz E-core Max Turbo frequency, up to 4.7 GHz P-core Max Turbo frequency, 20 MB L3 cache, 6 P-cores and 4 E-cores, 16 threads). | | X | X | X |
| Intel® Core™ i5-14400T with Intel UHD Graphics 730 (1.1 GHz E-core base frequency, 1.5 GHz P-core base frequency, up to 3.2 GHz E-core Max Turbo frequency, up to 4.5 GHz P-core Max Turbo frequency, 20 MB L3 cache, 6 P-cores and 4 E-cores, 16 threads). | X | | | X |
| Intel® Core™ i3-14100 with Intel UHD Graphics 730 (3.5 GHz P-core base frequency, up to 4.7 GHz P-core Max Turbo frequency, 12 MB L3 cache, 4 P-cores, 8 threads) | | X | X | X |
| Intel® Core™ i3-14100T with Intel UHD Graphics 730 (2.7 GHz P-core base frequency, up to 4.4 GHz P-core Max Turbo frequency, 12 MB L3 cache, 4 P-cores, 8 threads) | X | | | X |
| Intel® Core™ 300 with Intel UHD Graphics 710 (3.9 GHz P-core base frequency, 6 MB L3 cache, 2 P-cores, 4 threads) | | X | X | X |
| Intel® Core™ 300T with Intel UHD Graphics 710 (3.4 GHz P-core base frequency, 6 MB L3 cache, 2 P-cores, 4 threads) | X | | | X |

Standard Features and Configurable Components (availability may vary by country)

GRAPHICS

Integrated Graphics

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|--|-------------|------------|------------|------------|
| Intel® UHD Graphics 770 (integrated on 12 th , 13 th & 14 th gen Core i7, Core i5-1x500 and Core i5-1x500T) | X | X | X | X |
| Intel® UHD Graphics 730 (integrated on 12 th , 13 th & 14 th gen Core i3/i5-1x400, i5-1x400T) | X | X | X | X |
| Intel® UHD Graphics 710 (integrated on Pentium® Gold, Celeron® and 300 series) | X | X | X | X |

Optional Discrete Graphics Solutions

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|---|-------------|------------|------------|------------|
| NVIDIA® GeForce® RTX 3050 8GB GDDR6 Graphics card | | | X | |
| NVIDIA GeForce RTX 4060 8 GB GDDR6 Graphics Card | | | X | |
| NVIDIA® A400 4GB GDDR6 Graphics card | | | X | |
| NVIDIA® Quadro T400 2GB Graphics Card | | X | X | |
| NVIDIA® T400 4GB Graphics Card | | X | X | |
| Intel® Arc A380 6GB GDDR6 Graphics card | | | X | |
| AMD Radeon™ 6300M with 2 GB GDDR6 Graphics | | | | X |
| AMD Radeon™ RX 6300 2GB GDDR6 Graphics card | | X | X | |

1. Only available with the 12th Generation processors.

Adapters and Cables

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|---|-------------|------------|------------|------------|
| HP DisplayPort™ Cable | X | X | X | X |
| HP DisplayPort™ to DVI-D Adapter | X | X | X | X |
| HP DisplayPort™ to HDMI True 4K Adapter | X | X | X | X |
| HP DisplayPort™ to VGA Adapter | X | X | X | X |
| HP USB to Serial Port Adapter | X | X | X | X |

STORAGE

NOTE: Starting from November 1st, 2023, all shipments will require Windows to be installed when selecting a SSD. HDD can only be configured as additional data drives and not as the boot drive.

3.5 inch SATA Hard Disk Drives (HDD)

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|-----------------------|-------------|------------|------------|------------|
| 1TB* 7200RPM SATA HDD | | X | X | |
| 2TB* 7200RPM SATA HDD | | X | X | |

NOTE: RAID is supported when 2 SATA hard drive are configured.

2.5 inch SATA Hard Disk Drives (HDD)

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|-----------------------|-------------|------------|------------|------------|
| 1TB* 7200RPM SATA HDD | | | | X |

Standard Features and Configurable Components (availability may vary by country)

M.2 PCIe NVMe Solid State Drives (SSD)

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|---|-------------|------------|------------|------------|
| 256GB M.2 2280 PCIe NVMe SSD | X | X | X | X |
| 512GB M.2 2280 PCIe NVMe SSD | X | X | X | X |
| 1TB M.2 2280 PCIe NVMe SSD | X | X | X | X |
| 256GB M.2 2280 PCIe NVMe Three Layer Cell SSD ¹ | X | X | X | X |
| 512GB M.2 2280 PCIe NVMe Three Layer Cell SSD | X | X | X | X |
| 1TB M.2 2280 PCIe NVMe Three Layer Cell SSD | X | X | X | X |
| 2TB M.2 2280 PCIe NVMe Three Layer Cell SSD | X | X | X | X |
| 256GB M.2 2280 PCIe NVMe Self Encrypted OPAL2 Three Layer Cell SSD ¹ | X | X | X | X |
| 512GB M.2 2280 PCIe NVMe Self Encrypted OPAL2 Three Layer Cell SSD | X | X | X | X |
| 256GB M.2 2280 PCIe OPAL2 NVMe SSD | X | X | X | X |

NOTE*: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows) of system disk is reserved for the system recovery software.

NOTE:** Storage DriveLock does not work with Self Encrypting or Optane based storage.

1. Only available with the 12th Generation processors.

Optical Disc Drives

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|--|-------------|------------|------------|------------|
| HP 9.5mm Slim DVD-ROM Drive ¹ | | X | X | X |
| HP 9.5mm Slim DVD Writer Drive | | X | X | X |

1. HD-DVD disks cannot be played on this drive. No support for DVD-RAM. Actual speeds may vary. Don't copy copyright-protected materials. Double Layer discs can store more data than single layer discs. Discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

Media Card Reader

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|---|-------------|------------|------------|------------|
| SD 4.0 with 5-in-1 Interface (Supports SD, SDXC, SDHC, UHS-I, UHS-II) | | X | X | |
| SD 3.0 with 4-in-1 Interface (Supports SD, SDXC, SDHC, UHS-I) | | | | X |

MEMORY

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|--|-------------|------------|------------|------------|
| DDR4-3200 (Transfer rates up to 3200 MT/s), Max 64 GB, 2 SO-DIMM | X | | | X |
| DDR4-3200 (Transfer rates up to 3200 MT/s), Max 64 GB, 2 U-DIMM | | X | X | |
| DDR5-4800 (Transfer rates up to 4800 MT/s), Max 64 GB, 2 U-DIMM | | X | X | |
| DDR5-4800 (Transfer rates up to 4800 MT/s) Max 64 GB, 2 SO-DIMM | X | | | X |
| DDR5-5600 (Transfer rates up to 5600 MT/s), Max 64 GB, 2 U-DIMM | | X | X | |

Standard Features and Configurable Components (availability may vary by country)

Memory Configuration

| | Mini | SFF | TWR | AiO |
|-----------------|-------------|------------|------------|------------|
| 4GB (4GB x 1) | X | X | X | X |
| 8GB (4GB x 2) | X | X | X | X |
| 8GB (8GB x 1) | X | X | X | X |
| 16GB (8GB x 2) | X | X | X | X |
| 16GB (16GB x 1) | X | X | X | X |
| 32GB (16GB x 2) | X | X | X | X |
| 32GB (32GB x 1) | X | X | X | X |
| 64GB (32GB x 2) | X | X | X | X |

NOTE: For systems configured with more than 3GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4GB requires a 64-bit operating system.

NOTE: Memory modules support data transfer rates up to 3200 MT/s respectively depending on memory module used; actual data rate is determined by the system's configured processor. See processor specifications for supported memory data rate.

NOTE: All memory slots are customer accessible / upgradeable.

NOTE: Memory speed 3200 MT/s can be achieved via two UDIMMs per channel (2DPC) when populated with the same part number.

NOTE: Memory modules support data transfer rates up to 5600/MTs requires selected i5, i7 or i9 CPUs. Memory configuration without selected CPUs support data transfer rates up to 4800 MT/s.

Standard Features and Configurable Components (availability may vary by country)

NETWORKING/COMMUNICATIONS

Ethernet (RJ-45)

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|---|-------------|------------|------------|------------|
| Intel® I219-LM 1 Gigabit Network Connection LOM (vPro®) | X | X | X | X |
| Network Adapter Intel FoxPond1 I225-T1 2.5GbE | | X | X | |

Wireless

| | | | | |
|---|---|---|---|---|
| Intel® Wi-Fi 6E ² AX211 + Bluetooth® 5.3 wireless card (802.11AX 2x2 vPro®, supporting gigabit data rate ³) ^{4,5} | X | X | X | X |
| Intel® Wi-Fi 6E ² AX211 + Bluetooth® 5.3 wireless card (802.11AX 2x2 non-vPro®, supporting gigabit data rate ³) ^{4,5} | X | X | X | X |
| Realtek Wi-Fi 6 ² RTL8852BE 802.11ax 2x2 with Bluetooth® 5.3 wireless card | X | X | X | X |
| Realtek RTL8821CE 802.11ac ⁵ 1x1 with Bluetooth® 4.2 wireless card | X | X | X | X |

1. Only available with Intel Core 14th Gen processors.

2. Wi-Fi 6E requires a Wi-Fi 6E router, sold separately, to function in the 6GHz band. Availability of public wireless access points limited. Wi-Fi 6E is backwards compatible with prior 802.11 specs. And available in countries where Wi-Fi 6E is supported. Wi-Fi 6E is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels.

3. Wi-Fi 6 is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels.

4. The HP 400 G9 TWR/SFF requires Intel® Core™ processor with DDR5 memory modules to support Wi-Fi 6E with external antenna and requires a Wi-Fi 6E router, sold separately, to function in the 6GHz band. Availability of public wireless access points limited. Wi-Fi 6E is backwards compatible with prior 802.11 specs. Available in countries where Wi-Fi 6E is supported. Wi-Fi 6E is backwards compatible with prior 802.11 specs. And available in countries where Wi-Fi 6E is supported. For HP 400 G9 TWR/SFF without Intel® Core™ processors and DDR5 memory modules, the product does not support Wi-Fi 6E standard and does not operate under 6GHz band. The products are compatible with 6GHz and other routers, sold separately, which have capability to operate in 2.4GHz and 5GHz, in compliance with Wi-Fi 6 and prior 802.11 specs. The actual throughput depends on network condition and router configuration. Internet service required and public wireless access points are limited.

5. Wireless access point and internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 5 (802.11 ac) is backwards compatible with prior 802.11 specs.

NOTE: Usage of the 6GHz band relies on Windows 11 Operating System support.

KEYBOARDS AND POINTING DEVICES

Keyboards

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|--|-------------|------------|------------|------------|
| HP Business Slim PS/2 Wired Keyboard | | X | X | |
| HP Wired Desktop 320K Keyboard | X | X | X | X |
| HP USB Business Slim Wired SmartCard CCID Keyboard | X | X | X | X |
| HP 125 Wired Keyboard | X | X | X | X |
| HP 125 Antimicrobial Wired Keyboard (China Only) | X | X | X | X |

Keyboard & Mouse Combo

| | | | | |
|--|---|---|---|---|
| HP 655 Wireless Keyboard and Mouse Combo | X | X | X | X |
|--|---|---|---|---|

Standard Features and Configurable Components (availability may vary by country)

Mouse

| | | | | |
|---|---|---|---|---|
| HP PS/2 Mouse | | X | X | |
| HP Wired Desktop 320M Mouse | X | X | X | X |
| HP 125 Wired Mouse | X | X | X | X |
| HP 125 Wired Antimicrobial Mouse (China Only) | X | X | X | X |
| HP 128 Wired Laser Mouse | X | X | X | X |

NOTE: Availability may vary by country

SECURITY

| | Mini | SFF | TWR | AiO |
|---|--------------------------------|-----|-----|-----|
| TPM 2.0 (FW: 15.21) endpoint security controller (Infineon SLB9672/Nuvoton NPCT760HABYX) Common Criteria EAL4+ Certified. FIPS 140-2 Level 2 Certified. | X | X | X | X |
| Intrusion Sensor (Optional) | | X | X | |
| Intrusion Sensor (integrated in the system board, can be enabled/disabled through BIOS) | X | | | X |
| Support for chassis cable lock devices | X (10 mm barrel or smaller) | X | X | X |
| Support for chassis padlocks devices | X | X | X | |
| Support for table lock | | | | X |
| SATA port disablement (via BIOS) | X | X | X | |
| Serial, USB enable/disable (via BIOS) | X | X | X | X |
| Intel® Identify Protection Technology (IPT) ¹ | X | X | X | X |
| Removable media write/boot control | X | X | X | X |
| Power-on password (via BIOS) | X | X | X | X |
| Setup password (via BIOS) | X | X | X | X |

1. Models configured with Intel® Core™ processors have the ability to utilize advanced security protection for online transactions. IPT, used in conjunction with participating web sites, provides double identity authentication by adding a hardware component in addition to the usual user name and password. IPT is initialized through an HP Client Security module

Standard Features and Configurable Components (availability may vary by country)

PORTS

Internal Slots and Ports

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|-----------------------------------|--|--|--|---|
| M.2 PCIe | (1) M.2 PCIe x1 2230 (for WLAN/BT) (1) M.2 PCIe x4 2280 (for storage) | (1) M.2 PCIe x1 2230 (for WLAN/BT ¹) (1) M.2 PCIe x4 2280 (for storage) | (1) M.2 PCIe x1 2230 (for WLAN/BT/storage ¹) (1) M.2 PCIe x4 2280 (for storage) | (1) M.2 PCIe x1 2230 (for WLAN) (1) M.2 PCIe x4 2280 (for storage) (1) M.2 PCIe x3 2280 (for storage) |
| PCI Express v4.0 x1 | | 1 | 1 | |
| PCI Express v4.0 x16 | | 1 | 1 | |
| PCI x1 | | | 1 | |
| SATA port | | 2 | 3 | |
| Integrated SATA storage connector | 1 | | | 1 |

1. Optional.

NOTE: For Desktop Mini with M.2 Storage config, there will be no SATA drive bracket. If you plan to use or upgrade the storage with any 2.5" SATA drive, please select a DM SATA Drive Bracket (available as both factory configured and after market option).

NOTE: PCI slots for TWR are full height and SFF are low profile.

Standard Features and Configurable Components (availability may vary by country)

| Bays | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|--|-------------|------------|------------|----------------|
| 9.5mm Slim Optical Disc Drive (ODD) | | 1 | 1 | 1 ¹ |
| SD Card Reader ¹ (optional) | | 1 | 1 | 1 |
| 2.5" Internal HDD cage | 1 | | | 1 |
| 3.5" Internal Storage Drive | | 1 | 2 | |

1. Must be configured at time of purchase

2. Need to be configured at the time of purchase, either SATA or the ODD can only be selected one at the same time.

| Standard User Accessible Ports | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|---|--|--|--|--|
| Type-A Hi-Speed USB 480Mbps signaling rate port | | 2 (rear) | 2 (rear) | |
| Type-A SuperSpeed USB 5Gbps signaling rate port | 2 (rear) | 3 (rear) | 3 (rear) | 2 (rear) |
| Type-A SuperSpeed USB 10Gbps signaling rate port | 2 (front) 1 (rear) | 3 (front) | 3 (front) | 2 (rear) 1 (side) |
| Type-C® SuperSpeed USB 10Gbps signaling rate port | | 1 (front) | 1 (front) | 1 (side) |
| Type-C® SuperSpeed USB 20Gbps signaling rate port | 1 (front) | | | |
| Video | 2 DisplayPort™ 1.4a (rear) 1 HDMI 2.1a (rear) | 1 DisplayPort™ 1.4a (rear) 1 HDMI 1.4b (rear) | 1 DisplayPort™ 1.4a (rear) 1 HDMI 1.4b (rear) | 1 DisplayPort™ 1.4a 1 HDMI-in (Rear) 1.4b |
| Audio | 1 Combo Audio Jack with CTIA and headset support (front) | 1 Combo Audio Jack with CTIA & OMTP and headset support (front) 1 Audio-Line-in/Line out (rear) | 1 Combo Audio Jack with CTIA & OMTP and headset support (front) 1 Audio-Line-in/Line out (rear) | 1 Combo Audio Jack with CTIA and OMTP headset support (side) |
| Network Interface | 1 RJ45 (rear) | 1 RJ45 (rear) | 1 RJ45 (rear) | 1 RJ45 (rear) |

1. Upgradeable to SuperSpeed USB 10Gbps signaling rate port if configured with additional digital video port via Flex Port 1 and/or Intel® vPro®

Standard Features and Configurable Components (availability may vary by country)

Rear Configurable Non-PCIe/PCI Slot User Accessible Ports

Flexible Port 1, choice of one of the following:

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|-----------------|---|--|--|--|
| Type-A USB | | 2 Type-A SuperSpeed USB 5Gbps signaling rate port | 2 Type-A SuperSpeed USB 5Gbps signaling rate port (rear) | |
| Type-C® USB | 1 SuperSpeed USB 10Gbps signaling rate port w/ DisplayPort™ Alt Mode and power intake via USB Type-C® Power Delivery up to 100W | 1 SuperSpeed USB 10Gbps signaling rate port w/ DisplayPort™ Alt Mode | 1 SuperSpeed USB 10Gbps signaling rate port w/ DisplayPort™ Alt Mode | 1 SuperSpeed USB 10Gbps signaling rate port w/ DisplayPort™ Alt Mode |
| Video | 1 DisplayPort™ 1.4a <u>or</u> HDMI 2.1a <u>or</u> VGA | 1 DisplayPort™ 1.4a <u>or</u> HDMI 2.1a <u>or</u> VGA | 1 DisplayPort™ 1.4a <u>or</u> HDMI 2.1a <u>or</u> VGA | 1 DisplayPort™ 1.4a <u>or</u> HDMI 2.1a or USB-C |
| Serial (RS-232) | 1 ¹ | 1 | 1 | 1 |

1. Sold separately or as an optional feature

(1) Flexible Port 2, choice of one of the following:

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|----------------------------------|---|------------|--|------------|
| Type-A USB | 2 Hi-Speed USB 480Mbps signaling rate port ¹ | | 1 Type-A SuperSpeed USB 5Gbps signaling rate port ² (front) | |
| Serial (RS-232) | 1 ¹ | | | |
| 2 nd External antenna | 1 ¹ | | | |

1. Must be configured at time of purchase

2. Front flex IO – Dual USB port and SD card reader can only select one at the same time.

Standard Features and Configurable Components (availability may vary by country)

USB SPECIFICATION AND MARKETING NAME MAPPING TABLE

| Marketing Name | Technical Terminology |
|--------------------------------------|-----------------------|
| Hi-Speed USB 480Mbps signaling rate | USB 2.0 |
| SuperSpeed USB 5Gbps signaling rate | USB 3.2 Gen 1 |
| SuperSpeed USB 10Gbps signaling rate | USB 3.2 Gen 2 |
| SuperSpeed USB 20Gbps signaling rate | USB 3.2 Gen 2x2 |

Standard Features and Configurable Components (availability may vary by country)

SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS

Software

HP Easy Clean¹
HP PC Hardware Diagnostics UEFI
HP Desktop Support Utilities
HP Privacy Settings
HP Setup Integrated OOBE
HP Support Assistant²
myHP with Multicamera support (AIO&Mini)³
HP Notifications
HP Connection Optimizer
HP Smart Support⁴
HP Services Scan⁵
Microsoft Office⁶
Miro⁷

Manageability Features

HP Connect⁸
HP Image Assistant (download)
HP Manageability Integration Kit (download) (Win 10 Only)⁹
HP Client Management Script Library (download)
HP Patch Assistant (download)¹⁰
HP Driver Packs (download)
HP Cloud Recovery¹¹
HP Client Catalog (download)

Security Features

HP Wolf Security for Business¹² includes HP Sure Click¹³ and HP Sure Sense¹⁴
HP Sure Start¹⁵
HP Tamper Lock¹⁶
HP Sure Admin¹⁷
Secured-Core PC (AIO&Mini)¹⁸
Windows Hello Enhanced Sign-in Security (ESS) (AIO)¹⁹

BIOS

HP BIOSphere²⁰
HP Secure Erase²¹
HP DriveLock & Automatic DriveLock
BIOS Update via Network
Absolute Persistence Module²²
Power-On Authentication²³
Microsoft 3rd Party UEFI CA Enable
UEFI Self Certification Level: 2.7B

1. HP Easy Clean requires Windows 10 RS3 and will disable the keyboard, touchscreen, and clickpad only. Ports are not disabled. See user guide for cleaning instructions.

2. HP Support Assistant is available on Windows. For more information, please visit <http://www.support.hp.com/help/hp-support-assistant>.

3. MyHP with Multicamera support for Mini Desktop PC will only available on 13th processor and beyond.

HP Smart Support automatically collects the telemetry necessary upon initial boot of the product to deliver device-level configuration data and health insights and is available preinstalled on select products, thru HP Factory Configuration Services; or it can be downloaded. For more information about how to enable HP Smart Support or for download, please visit <http://www.hp.com/smart-support>.

5. HP Services Scan automatically collects the telemetry necessary upon initial boot of the product to deliver device-level configuration data and health insights and is available preinstalled on select products, thru HP Factory Configuration Services; or it can be downloaded. For more information about how to enable HP Smart Support or for download, please visit <http://www.hp.com/smart-support>.

6. Microsoft 365 sold separately and requires Internet access for activation.

Standard Features and Configurable Components (availability may vary by country)

7. HP customers qualify for a 90 day trial of Miro, this offer ends September 2025. Complete terms and conditions are provided by Miro when accepting the offer.
8. HP Connect for Microsoft Endpoint Manager is available from the Azure Market Place for HP Pro, Elite, Z and Point-of-Sale PCs managed with Microsoft Endpoint Manager. Subscription to Microsoft Endpoint Manager required and sold separately. Network connection required.
9. HP Manageability Integration Kit can be downloaded from <http://www.hp.com/go/clientmanagement>.
10. HP Patch Assistant available on select HP PCs with the HP Manageability Kit that are managed through Microsoft System Center Configuration Manager. HP Manageability Integration Kit can be downloaded from <http://www8.hp.com/us/en/ads/clientmanagement/overview.html>.
11. HP Cloud Recovery is available for Z by HP, HP Elite and Pro desktops and laptops PCs with Intel® or AMD processors and requires an open, wired network connection. Note: You must back up important files, data, photos, videos, etc. before use to avoid loss of data. Detail, please refer to: <https://support.hp.com/us-en/document/c05115630>.
12. HP Wolf Security for Business requires Windows 10 or 11 or higher, includes various HP security features and is available on HP Pro, Elite, RPOS and Workstation products. See product details for included security features.
13. HP Sure Click requires Windows 10 Pro or higher or Enterprise. See https://bit.ly/2PrLT6A_SureClick for complete details.
14. HP Sure Sense is available on select HP PCs with Windows 10 Pro, Windows 10 Enterprise, Windows 11 Pro, or Windows 11 Enterprise OS.
15. HP Sure Start is available on select HP PCs and requires Windows 10 and higher
16. HP Tamper Lock can be Enabled/disabled by customers or IT administrator with administrator authority.
17. HP Sure Admin requires HP G8 or newer platforms, Windows 10 or higher, HP BIOS, HP Manageability Kit or KMS Service from <http://www.hp.com/go/clientmanagement> and HP Sure Admin Local Access Authenticator smartphone app from the Android or Apple store
18. Secured-Core PC Enable requires an Intel® vPro®, AMD Ryzen™ Pro processor or Qualcomm® processor with SD850 or higher and requires 8 GB or more system memory. Secured-core PC is enabled from the factory.
19. Requires a Windows Hello webcam or fingerprint reader.
20. HP BIOSphere features may vary depending on the platform and configuration.
21. HP Secure Erase for the methods outlined in the National Institute of Standards and Technology Special Publication 800-88 "Clear" sanitation method. HP Secure Erase does not support platforms with Intel® Optane™.
22. Absolute firmware module is shipped turned off and can only be activated with the purchase a license subscription and full activation of the software agent. License subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. Certain conditions apply. For full details visit: <http://www.absolute.com/about/legal/agreements/absolute>.
23. Ensures that only authorized users can start up the PC or access the BIOS by requiring user authentication using a password prior to system start-up.

Standard Features and Configurable Components (availability may vary by country)

UNIT ENVIRONMENT AND OPERATING CONDITIONS

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range Operating: 5° to 35° C¹

Non-Operating for AiO: -20° to 60° C¹

Non-Operating for MT/SFF/DM: -30° to 60° C¹

Relative Humidity Operating: 10% to 90% (non-condensing at ambient)

Non-operating: 5% to 95% (non-condensing at ambient)

Maximum Altitude Operating: 5000m

(unpressurized) Non-operating: 50000ft (15240 m)

1. Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

Standard Features and Configurable Components (availability may vary by country)

ENVIRONMENTAL & INDUSTRY

HP Pro Mini 400 G9 Desktop PC

| Eco-Label Certifications & declarations | <p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> IT ECO declaration US ENERGY STAR® US Federal Energy Management Program (FEMP) EPEAT® Climate+ registered in the United States. See http://www.epeat.net for registration status in your country.* TCO Certified China Energy Conservation Program (CECP) China State Environmental Protection Administration (SEPA) Taiwan Green Mark Korea Eco-label Japan PC Green label Commission Regulation (EC) No 617/2013 (ErP Lot 3) <p>NOTE*: Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. EPEAT® status varies by country. Visit http://www.epeat.net for more information.</p> | | |
|--|---|---------------------|---------------------|
| Sustainable Impact Specifications | <ul style="list-style-type: none"> Ocean-bound plastic in Frame, Panel and Speaker¹ 40% post-consumer recycled plastic² Low halogen³ Outside Box and corrugated cushions are 100% sustainably sourced and recyclable⁴ Molded Paper Pulp Cushion inside box is 100% sustainably sourced and recyclable⁵ Bulk packaging available⁶ | | |
| System Configuration | <p>The configuration used for the Energy Consumption and Declared Noise Emissions data for the Desktop model is based on a Typically Configured Desktop.</p> | | |
| Energy Consumption (in accordance with US ENERGY STAR® test method) | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
| Normal Operation (Short idle) | 7.23 W | 7.31 W | 7.07 W |
| Normal Operation (Long idle) | 2.16 W | 2.24 W | 2.01 W |
| Sleep | 2.14 W | 2.21 W | 1.99 W |
| Off | 0.62 W | 0.7 W | 0.47 W |
| | <p>NOTE: Energy efficiency data listed is for an ENERGY STAR® certified product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are certified with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® certified configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.</p> | | |
| Heat Dissipation* | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 50Hz |
| Normal Operation (Short idle) | 24.7 BTU/hr | 25 BTU/hr | 24.2 BTU/hr |
| Normal Operation (Long idle) | 7.4 BTU/hr | 7.7 BTU/hr | 6.9 BTU/hr |
| Sleep | 7.3 BTU/hr | 7.6 BTU/hr | 6.8 BTU/hr |
| Off | 2.1 BTU/hr | 2.41 BTU/hr | 1.6 BTU/hr |

Standard Features and Configurable Components (availability may vary by country)

| | | | |
|--|---|--|------|
| | NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour. | | |
| Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296) | Sound Power (L _{WAd} , bels) | Sound Pressure (L _{pAm} , decibels) | |
| Typically Configured – Idle | 2.9 | 17 | |
| Fixed Disk – Random writes | 3.0 | 19 | |
| Longevity and upgrading | <p>This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:</p> <ul style="list-style-type: none"> • 2 SODIMM memory slots • Interchangeable M.2 PCIe NVME SSD & 2.5" SATA HDD <p>Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.</p> | | |
| Batteries | <p>This battery(s) in this product comply with EU Directive 2006/66/EC</p> <p>Batteries used in the product do not contain: Mercury greater than 1ppm by weight Cadmium greater than 20ppm by weight</p> <p>Battery size: CR2032 (coin cell) Battery type: Lithium</p> | | |
| Additional Information | <ul style="list-style-type: none"> • This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC. • This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC. • This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). • Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043. • This product contains a minimum of 35% post-consumer recycled (PCR) plastic (by wt.); including 10% ITE-derived post-consumer recycled plastic.* • This product is 95.1% recycle-able when properly disposed of at end of life. <p>*Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard.</p> | | |
| Packaging Materials (vary by country) | External: | PAPER/Paper | 562g |
| | Internal: | PAPER/Molded Pulp | 79g |
| | | PLASTIC/Polyethylene low density - LDPE | 16g |
| Material Usage | <p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf):</p> <ul style="list-style-type: none"> • Asbestos • Certain Azo Colorants • Certain Brominated Flame Retardants – may not be used as flame retardants in plastics • Cadmium • Chlorinated Hydrocarbons • Chlorinated Paraffins • Formaldehyde • Halogenated Diphenyl Methanes • Lead carbonates and sulfates • Lead and Lead compounds | | |

Standard Features and Configurable Components (availability may vary by country)

| | |
|---|---|
| | <ul style="list-style-type: none"> • Mercuric Oxide Batteries • Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user. • Ozone Depleting Substances • Polybrominated Biphenyls (PBBs) • Polybrominated Biphenyl Ethers (PBBEs) • Polybrominated Biphenyl Oxides (PBBOs) • Polychlorinated Biphenyl (PCB) • Polychlorinated Terphenyls (PCT) • Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications. • Radioactive Substances • Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO) |
| Packaging Usage | <p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"> • Design packaging materials for ease of disassembly. • Maximize the use of post-consumer recycled content materials in packaging materials. • Use readily recyclable packaging materials such as paper and corrugated materials. • Reduce size and weight of packages to improve transportation fuel efficiency. • Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards. |
| End-of-life Management and Recycling | <p>HP Inc. offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p> <p>Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</p> <p>Eco-label certifications http://www8.hp.com/us/en/hp-information/environment/ecolabels.html</p> <p>ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf and http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf</p> |
| Footnotes | <ol style="list-style-type: none"> 1. Percentage of ocean-bound plastic contained in each component varies by product. 2. Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard. 3. External power supplies, WWAN modules, power cords, cables and peripherals excluded. 4. 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers. 5. Fiber cushions made from 100% recycled wood fiber and organic materials. 6. Plastic cushions are made from >90% recycled plastic. |

Standard Features and Configurable Components (availability may vary by country)

HP Pro SFF 400 G9 Desktop PC

| Eco-Label Certifications & declarations | <p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> IT ECO declaration US ENERGY STAR® US Federal Energy Management Program (FEMP) EPEA® Climate+ registered in the United States. See http://www.epeat.net for registration status in your country.* TCO Certified China Energy Conservation Program (CECP) China State Environmental Protection Administration (SEPA) Taiwan Green Mark Korea Eco-label Japan PC Green label Commission Regulation (EC) No 617/2013 (ErP Lot 3) <p>NOTE*: Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. EPEAT® status varies by country. Visit http://www.epeat.net for more information.</p> | | |
|--|--|---------------------|---------------------|
| Sustainable Impact Specifications | <ul style="list-style-type: none"> Ocean-bound plastic in Speaker and Fan 50% post-consumer recycled plastic Low halogen Outside Box and corrugated cushions are 100% sustainably sourced and recyclable Molded Paper Pulp Cushion inside box is 100% sustainably sourced and recyclable Bulk packaging available | | |
| System Configuration | <p>The configuration used for the Energy Consumption and Declared Noise Emissions data for the Desktop model is based on a Typically Configured Desktop.</p> | | |
| Energy Consumption (in accordance with US ENERGY STAR® test method) | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
| Normal Operation (Short idle) | 12.12 W | 12.15 W | 12.10 W |
| Normal Operation (Long idle) | 10.38 W | 10.41 W | 10.35 W |
| Sleep | 0.94 W | 0.94 W | 0.94 W |
| Off | 0.78 W | 0.78 W | 0.78 W |
| | <p>NOTE: Energy efficiency data listed is for an ENERGY STAR® certified product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are certified with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® certified configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency , and a Microsoft Windows® operating system.</p> | | |
| Heat Dissipation* | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
| Normal Operation (Short idle) | 41.34 BTU/hr | 41.42 BTU/hr | 41.26 BTU/hr |
| Normal Operation (Long idle) | 35.40 BTU/hr | 35.50 BTU/hr | 35.28 BTU/hr |
| Sleep | 3.21 BTU/hr | 3.20 BTU/hr | 3.21 BTU/hr |
| Off | 2.65 BTU/hr | 2.64 BTU/hr | 2.64 BTU/hr |

Standard Features and Configurable Components (availability may vary by country)

| | |
|--|---|
| | NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour. |
|--|---|

| Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296) | Sound Power (L _{WA} , bels) | Sound Pressure (L _{PA} , decibels) |
|---|--|---|
| Typically Configured – Idle | 3.3 | 23 |
| Fixed Disk – Random writes | 4.6 | 36 |
| Optical Drive sequential reads | 3.2 | 23 |
| Longevity and Upgrading | This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include: <ul style="list-style-type: none"> • 2 DIMM memory slots • Interchangeable M.2 PCIe NVME SSD & 2.5"/3.5" SATA HDD Spare parts are available throughout the warranty period and or for up to "5" years after the end of production. | |
| Batteries | This battery(s) in this product comply with EU Directive 2006/66/EC Batteries used in the product do not contain: Mercury greater than 1ppm by weight Cadmium greater than 20ppm by weight Battery size: CR2032 (coin cell) Battery type: Lithium | |
| Additional Information | <ul style="list-style-type: none"> • This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2011/65/EC. • This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC. • This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). • Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043. • This product contains a minimum of 35% post-consumer recycled (PCR) plastic (by wt.); including 10% ITE-derived post-consumer recycled plastic.* • This product is 92.1% recycle-able when properly disposed of at end of life. <p>*Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard.</p> | |
| Packaging Materials (vary by country) | External: PAPER/Corrugated | 1104 g |
| | Internal: PAPER/Molded pulp | 462 g |
| | PLASTIC/Polyethylene low density | 26 g |
| Material Usage | This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf): <ul style="list-style-type: none"> • Asbestos • Certain Azo Colorants • Certain Brominated Flame Retardants – may not be used as flame retardants in plastics • Cadmium • Chlorinated Hydrocarbons • Chlorinated Paraffins • Formaldehyde | |

Standard Features and Configurable Components (availability may vary by country)

| | |
|--|--|
| | <ul style="list-style-type: none"> • Halogenated Diphenyl Methanes • Lead carbonates and sulfates • Lead and Lead compounds • Mercuric Oxide Batteries • Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user. • Ozone Depleting Substances • Polybrominated Biphenyls (PBBs) • Polybrominated Biphenyl Ethers (PBBEs) • Polybrominated Biphenyl Oxides (PBBOs) • Polychlorinated Biphenyl (PCB) • Polychlorinated Terphenyls (PCT) • Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications. • Radioactive Substances • Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO) |
| Packaging Usage | <p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"> • Design packaging materials for ease of disassembly. • Maximize the use of post-consumer recycled content materials in packaging materials. • Use readily recyclable packaging materials such as paper and corrugated materials. • Reduce size and weight of packages to improve transportation fuel efficiency. • Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards. |
| End-of-life Management and Recycling | <p>HP Inc. offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p> |
| HP Inc. Corporate Environmental Information | <p>For more information about HP's commitment to the environment:</p> <p>Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</p> <p>Eco-label certifications http://www8.hp.com/us/en/hp-information/environment/ecolabels.html</p> <p>ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf and http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf</p> |

Standard Features and Configurable Components (availability may vary by country)

HP Pro Tower 400/480 G9 PCI Desktop PC

| | | | |
|--|---|---------------------|---------------------|
| Eco-Label Certifications & declarations | <p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> IT ECO declaration US ENERGY STAR® US Federal Energy Management Program (FEMP) EPEAT® Climate+ registered in the United States. See http://www.epeat.net for registration status in your country.* TCO Certified China Energy Conservation Program (CECP) China State Environmental Protection Administration (SEPA) Taiwan Green Mark Korea Eco-label Japan PC Green label Commission Regulation (EC) No 617/2013 (ErP Lot 3) <p>NOTE: *Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. EPEAT® status varies by country. Visit http://www.epeat.net for more information.</p> | | |
| Sustainable Impact Specifications | <ul style="list-style-type: none"> Ocean-bound plastic in Speaker and Fan 60% post-consumer recycled plastic Low halogen Outside Box and corrugated cushions are 100% sustainably sourced and recyclable Molded Paper Pulp Cushion inside box is 100% sustainably sourced and recyclable Bulk packaging available | | |
| System Configuration | <p>The configuration used for the Energy Consumption and Declared Noise Emissions data for the Desktop model is based on a Typically Configured Desktop.</p> | | |
| Energy Consumption (in accordance with US ENERGY STAR® test method) | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
| Normal Operation (Short idle) | 12.69 W | 12.69 W | 12.69 W |
| Normal Operation (Long idle) | 10.95 W | 10.97 W | 10.95 W |
| Sleep | 0.99 W | 0.99 W | 0.98 W |
| Off | 0.80 W | 0.80 W | 0.80 W |
| | <p>NOTE: Energy efficiency data listed is for an ENERGY STAR® certified product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are certified with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® certified configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.</p> | | |
| Heat Dissipation* | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
| Normal Operation (Short idle) | 43.27 BTU/hr | 43.28 BTU/hr | 43.26 BTU/hr |
| Normal Operation (Long idle) | 37.35 BTU/hr | 37.40 BTU/hr | 37.34 BTU/hr |
| Sleep | 3.36 BTU/hr | 3.37 BTU/hr | 3.35 BTU/hr |
| Off | 2.72 BTU/hr | 2.72 BTU/hr | 2.71 BTU/hr |
| | <p>NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.</p> | | |

Standard Features and Configurable Components (availability may vary by country)

| Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296) | Sound Power (L _{WA} , bels) | Sound Pressure (L _{PA} , decibels) | |
|--|---|--|--------|
| Typically Configured – Idle | 3.1 | 21 | |
| Fixed Disk – Random writes | 3.2 | 22 | |
| Optical Drive - Sequential reads | 4.0 | 28 | |
| Longevity and Upgrading | <p>This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:</p> <ul style="list-style-type: none"> • 2 DIMM memory slots • Interchangeable M.2 PCIe NVME SSD & 2.5"/3.5" SATA HDD <p>Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.</p> | | |
| Batteries | <p>This battery(s) in this product complies with EU Directive 2006/66/EC</p> <p>Batteries used in the product do not contain: Mercury greater than 1ppm by weight Cadmium greater than 20ppm by weight</p> <p>Battery size: CR2032 (coin cell) Battery type: Lithium</p> | | |
| Additional Information | <ul style="list-style-type: none"> • This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC. • This HP product is designed to complies with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC. • This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). • This product is in compliance with the IEEE 1680.1 (EPEAT) standard at the [®] Climate+ level, see http://www.epeat.net • Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043. • This product contains 44.4% post-consumer recycled plastic (by wt.) • This product is 92.1% recycle-able when properly disposed of at end of life. | | |
| Packaging Materials (vary by country) | External: | PAPER/Corrugated | 1110 g |
| | | PAPER/Molded Pulp | 654 g |
| | Internal: | PLASTIC/Polyethylene low density - LDPE | 32 g |
| Material Usage | <p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf):</p> <ul style="list-style-type: none"> • Asbestos • Certain Azo Colorants • Certain Brominated Flame Retardants – may not be used as flame retardants in plastics • Cadmium • Chlorinated Hydrocarbons • Chlorinated Paraffins • Formaldehyde • Halogenated Diphenyl Methanes • Lead carbonates and sulfates • Lead and Lead compounds • Mercuric Oxide Batteries | | |

Standard Features and Configurable Components (availability may vary by country)

| | |
|--|---|
| | <ul style="list-style-type: none"> • Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user. • Ozone Depleting Substances • Polybrominated Biphenyls (PBBs) • Polybrominated Biphenyl Ethers (PBBEs) • Polybrominated Biphenyl Oxides (PBBOs) • Polychlorinated Biphenyl (PCB) • Polychlorinated Terphenyls (PCT) • Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications. • Radioactive Substances • Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO) |
| Packaging Usage | <p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"> • Design packaging materials for ease of disassembly. • Maximize the use of post-consumer recycled content materials in packaging materials. • Use readily recyclable packaging materials such as paper and corrugated materials. • Reduce size and weight of packages to improve transportation fuel efficiency. • Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards. |
| End-of-life Management and Recycling | <p>HP Inc. offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p> |
| HP Inc. Corporate Environmental Information | <p>For more information about HP's commitment to the environment:</p> <p>Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</p> <p>Eco-label certifications http://www8.hp.com/us/en/hp-information/environment/ecolabels.html</p> <p>ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf and http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf</p> |

Standard Features and Configurable Components (availability may vary by country)

HP ProOne 440 23.8 inch G9 All-in-One Desktop PC

| | | | |
|--|--|---------------------|--|
| Eco-Label Certifications & declarations | <p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> IT ECO declaration US ENERGY STAR® US Federal Energy Management Program (FEMP) EPEAT® Climate+ registered in the United States. See http://www.epeat.net for registration status in your country. TCO Certified China Energy Conservation Program (CECP) China State Environmental Protection Administration (SEPA) Taiwan Green Mark Korea Eco-label Japan PC Green label Commission Regulation (EC) No 617/2013 (ErP Lot 3) | | |
| Sustainable Impact Specifications | <ul style="list-style-type: none"> Ocean-bound plastic in CPU Fan and Speaker 45% post-consumer recycled plastic External Power Supply 90% Efficiency Low halogen Outside Box and corrugated cushions are 100% sustainably sourced and recyclable Recycled Plastic cushions | | |
| System Configuration | <p>The configuration used for the Energy Consumption and Declared Noise Emissions data for the Desktop model is based on a "Typically Configured Desktop".</p> | | |
| Energy Consumption (in accordance with US ENERGY STAR® test method) | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
| Normal Operation (Short idle) | 16.13 W | 16.47 W | 16.25 W |
| Normal Operation (Long idle) | 4.60 W | 4.73 W | 4.87 W |
| Sleep | 1.75 W | 1.76 W | 1.73 W |
| Off | 0.67 W | 0.62 W | 0.62 W |
| | <p>NOTE: Energy efficiency data listed is for an ENERGY STAR® certified product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are certified with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® certified configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.</p> | | |
| Heat Dissipation* | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
| Normal Operation (Short idle) | 55 BTU/hr | 56 BTU/hr | 55 BTU/hr |
| Normal Operation (Long idle) | 15 BTU/hr | 16 BTU/hr | 17 BTU/hr |
| Sleep | 6 BTU/hr | 6 BTU/hr | 6 BTU/hr |
| Off | 2 BTU/hr | 2 BTU/hr | 2 BTU/hr |
| | <p>NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.</p> | | |
| Declared Noise Emissions | Sound Power (L _{WA0} , bels) | | Sound Pressure (L _{pAm} , decibels) |

Standard Features and Configurable Components (availability may vary by country)

| (in accordance with ISO 7779 and ISO 9296) | | | |
|--|---|---|--------|
| Typically Configured – Idle | 2.6 | 15 | |
| Fixed Disk – Random writes | 2.6 | 16 | |
| Optical Drive – Sequential reads | 4.7 | 35 | |
| Longevity and Upgrading | <p>This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:</p> <ul style="list-style-type: none"> • 2 SODIMM memory slots <p>Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.</p> | | |
| Batteries | <p>This battery(s) in this product comply with EU Directive 2006/66/EC</p> <p>Batteries used in the product do not contain:</p> <p>Mercury greater than 1ppm by weight</p> <p>Cadmium greater than 20ppm by weight</p> <p>Battery size: CR2032 (coin cell)</p> <p>Battery type: Lithium</p> | | |
| Additional Information | <ul style="list-style-type: none"> • This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2011/65/EC. • This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC. • This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). • This product is in compliance with the IEEE 1680 (EPEAT) standard, see http://www.epeat.net. • Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043. • This product contains a minimum of 50% post-consumer recycled (PCR) plastic (by wt.); including 10% ITE-derived post-consumer recycled plastic.* • This product is 95.9% recycle-able when properly disposed of at end of life. <p>*Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard.</p> | | |
| Packaging Materials (vary by country) | External: | PAPER/Corrugated | 2072 g |
| | | Paper/Paperboard | 1040 g |
| | Internal: | PLASTIC/EPE (Expanded Polyethylene) | 182 g |
| | | PLASTIC/Polyethylene low density - LDPE | 45 g |
| | The plastic packaging material contains at least 0.0% recycled content. | | |
| The corrugated paper packaging materials contains at least 90.0% recycled content. | | | |
| Material Usage | <p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf):</p> <ul style="list-style-type: none"> • Asbestos • Certain Azo Colorants • Certain Brominated Flame Retardants – may not be used as flame retardants in plastics • Cadmium • Chlorinated Hydrocarbons • Chlorinated Paraffins • Formaldehyde • Halogenated Diphenyl Methanes | | |

Standard Features and Configurable Components (availability may vary by country)

| | |
|---|--|
| | <ul style="list-style-type: none"> • Lead carbonates and sulfates • Lead and Lead compounds • Mercuric Oxide Batteries • Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user. • Ozone Depleting Substances • Polybrominated Biphenyls (PBBs) • Polybrominated Biphenyl Ethers (PBBEs) • Polybrominated Biphenyl Oxides (PBBOs) • Polychlorinated Biphenyl (PCB) • Polychlorinated Terphenyls (PCT) • Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications. • Radioactive Substances • Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO) |
| Packaging Usage | <p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"> • Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials. • Eliminate the use of ozone-depleting substances (ODS) in packaging materials. • Design packaging materials for ease of disassembly. • Maximize the use of post-consumer recycled content materials in packaging materials. • Use readily recyclable packaging materials such as paper and corrugated materials. • Reduce size and weight of packages to improve transportation fuel efficiency. • Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards. |
| End-of-life Management and Recycling | <p>HP Inc. offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p> <p>Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</p> <p>Eco-label certifications http://www8.hp.com/us/en/hp-information/environment/ecolabels.html</p> <p>ISO 14001 certificates: http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842 and http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf</p> |
| footnotes | <ul style="list-style-type: none"> • Percentage of ocean-bound plastic contained in each component varies by product • Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard. • External power supplies, WWAN modules, power cords, cables and peripherals excluded. • 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers. • Plastic cushions are made from >90% recycled plastic. |

Standard Features and Configurable Components (availability may vary by country)

SERVICE AND SUPPORT

On-site Warranty¹: One-year (1-1-1) limited warranty delivers one year of on-site, next business day² service for parts and labor support. Service offers terms up to 5 years by choosing an optional HP Care Pack. To choose the right level of service for your HP product, visit HP Care Pack Central: <http://www.hp.com/go/cpc>.³

1. Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.
2. On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
3. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit www.hp.com/go/cpc. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

Technical Specifications - Processors

PROCESSORS

12th /13th/14th Generation Intel® Core™ Processors¹

All HP ProDesk & ProOne 400 Business PC models featuring this technology include processors that are part of the Intel® Stable Image Platform Program (SIPP) designed to ensure the stability promise inherent in the value proposition of the HP ProDesk and ProOne 400 Business PC.

Intel® Advanced Management Technology (AMT)¹ v16 – An advanced set of remote management features and functionality which provides network administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT 16 includes the following advanced management functions:

- Support for configuration of Intel® AMT 16.0 capabilities
- No reset after provisioning
- Support for Intel® Enterprise Digital Fence
- The Platform Discovery Utility can now discover these additional Intel® products:
 - Intel® Identity Protection Technology with One Time Password
 - Public Key Infrastructure
 - Multi Factor Authentication
- Profile Editor and Profile Editor Plugin Interface
- Required Permissions for Solutions Framework

1. Intel® Active Management Technology requires an Intel® AMT-enabled chipset, network hardware and software, as well as connection with a power source and a corporate network connection. Setup requires configuration by the purchaser and may require scripting with the management console or further integration into existing security frameworks to enable certain functionality. It may also require modifications of implementation of new business processes.

Technical Specifications - Display Panel Specifications

DISPLAY PANEL SPECIFICATIONS

NOTE: All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

HP ProOne 440 23.8 inch G9 All-in-One Desktop PC

23.8" diagonal IPS widescreen WLED backlit anti-glare LCD (1920 x 1080)

Projected Capacitive Touch supports up to 10 touch-points

Support HW low blue light feature

| | |
|---|---|
| Type | IPS WLED Backlit LCD |
| Active area (mm) | 527.04 x 296.46 |
| Native Resolution (HxV) | 1920 x 1080 |
| Refresh Rate | 60 Hz @ 1920 x 1080 |
| Aspect ratio | 16:9 |
| Pixel pitch (HxV)(mm) | 0.2745 x 0.2745 |
| Contrast ratio | 1000:1 |
| Brightness* | 300nits* |
| Viewing angle (HxV) | 178° x 178° |
| Backlight lamp life (to half brightness) | 30,000 hours minimum |
| Color support | Up to 16.7 million colors with 8 Bit(6 Bit + FRC) |
| Color gamut | sRGB 99% |
| Anti-glare | Yes |
| Response Time | 14ms |
| Default color temperature | Warm (6500K) |

*Actual brightness will be lower with touchscreen

23.8" diagonal IPS widescreen WLED backlit anti-glare LCD (1920 x 1080) non-touch

Support HW low blue light feature

| | |
|---|---|
| Type | IPS WLED Backlit LCD |
| Active area (mm) | 527.04 x 296.46 |
| Native Resolution (HxV) | 1920 x 1080 |
| Refresh Rate | 60 Hz @ 1920 x 1080 |
| Aspect ratio | 16:9 |
| Pixel pitch (HxV)(mm) | 0.2745 x 0.2745 |
| Contrast ratio | 1000:1 |
| Brightness* | 250nits* |
| Viewing angle (HxV) | 178° x 178° |
| Backlight lamp life (to half brightness) | 30,000 hours minimum |
| Color support | Up to 16.7 million colors with 8 Bit(6 Bit + FRC) |
| Color gamut | NTSC 72% |
| Anti-glare | Yes |
| Response Time | 14ms |
| Default color temperature | Warm (6500K) |


*Actual brightness will be lower with touchscreen

Technical Specifications - All-in-One Stand Specifications

ALL-IN-ONE STAND SPECIFICATIONS

HP ProOne 440 23.8 inch G9 All-in-One Desktop PC

| | | |
|---|--|-------------|
| Cantilever Stand (Fixed Height Tilt Stand) | Height Adjustment (Portrait Mode) | N/A |
| | Tilt Angle | -5° to +20° |
| | Rotation (Swivel) | None |
| | Pivot | None |

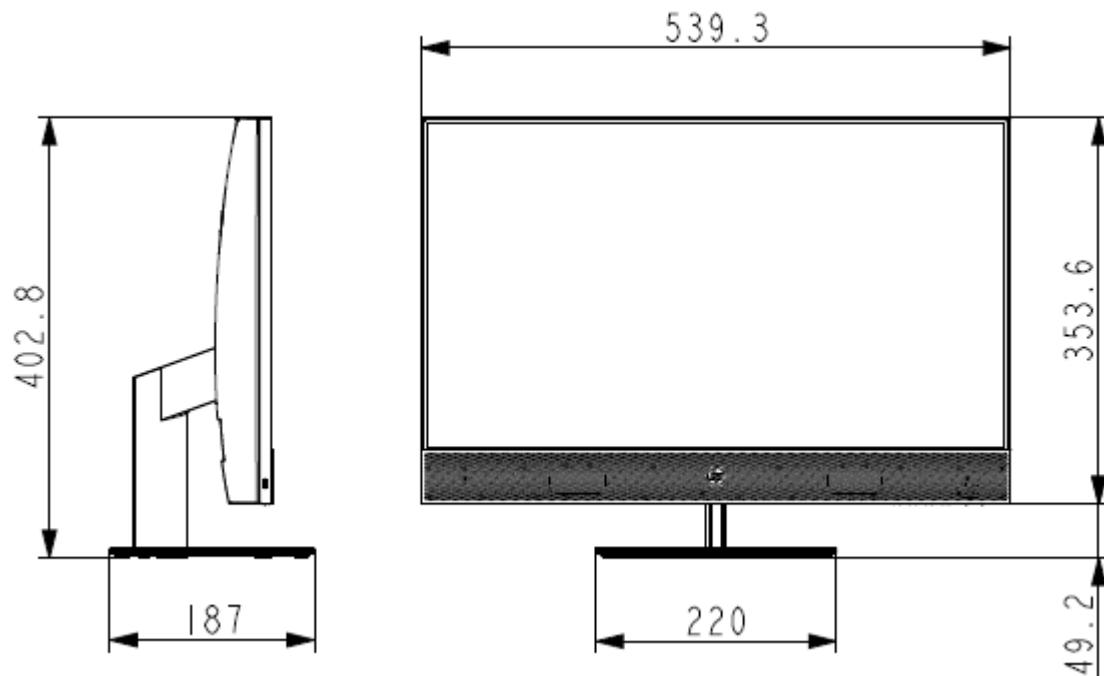

Technical Specifications - All-in-One Stand Specifications

Adjustable Height Stand

Height Adjustment (Landscape Mode)

5.12 in / 130mm

Height Adjustment (Portrait Mode)

N/A

Tilt Angle


-5° to +20°

Rotation (Swivel)

±45°

Pivot

None

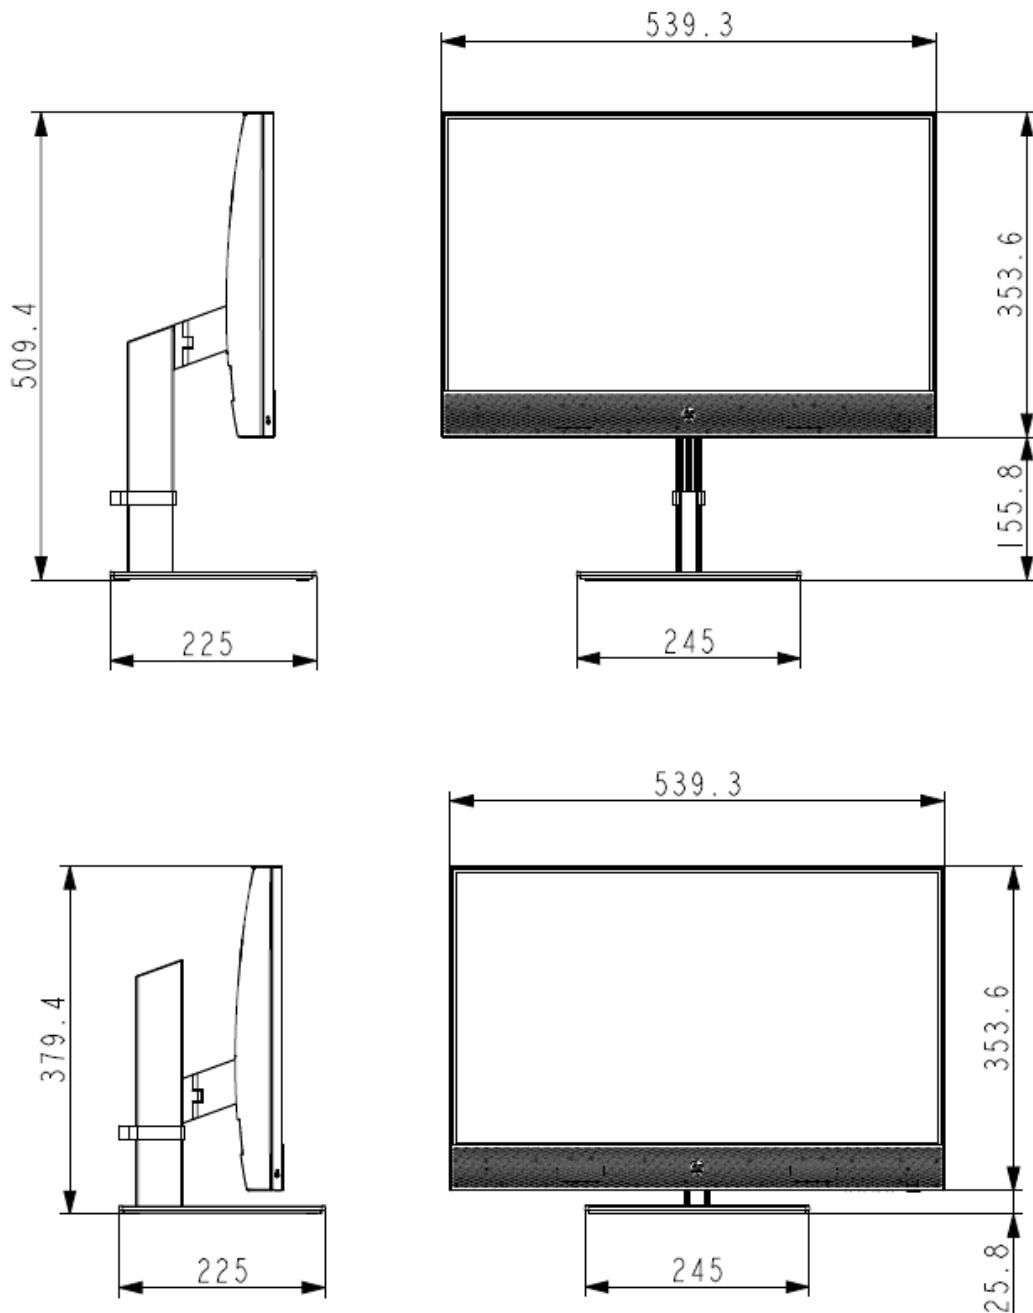

Technical Specifications - All-in-One Stand Specifications

No Stand (VESA COVER with EPS Holder¹)

Height Adjustment (Portrait Mode)

N/A

Tilt Angle


None

Rotation (Swivel)

None

Pivot

None

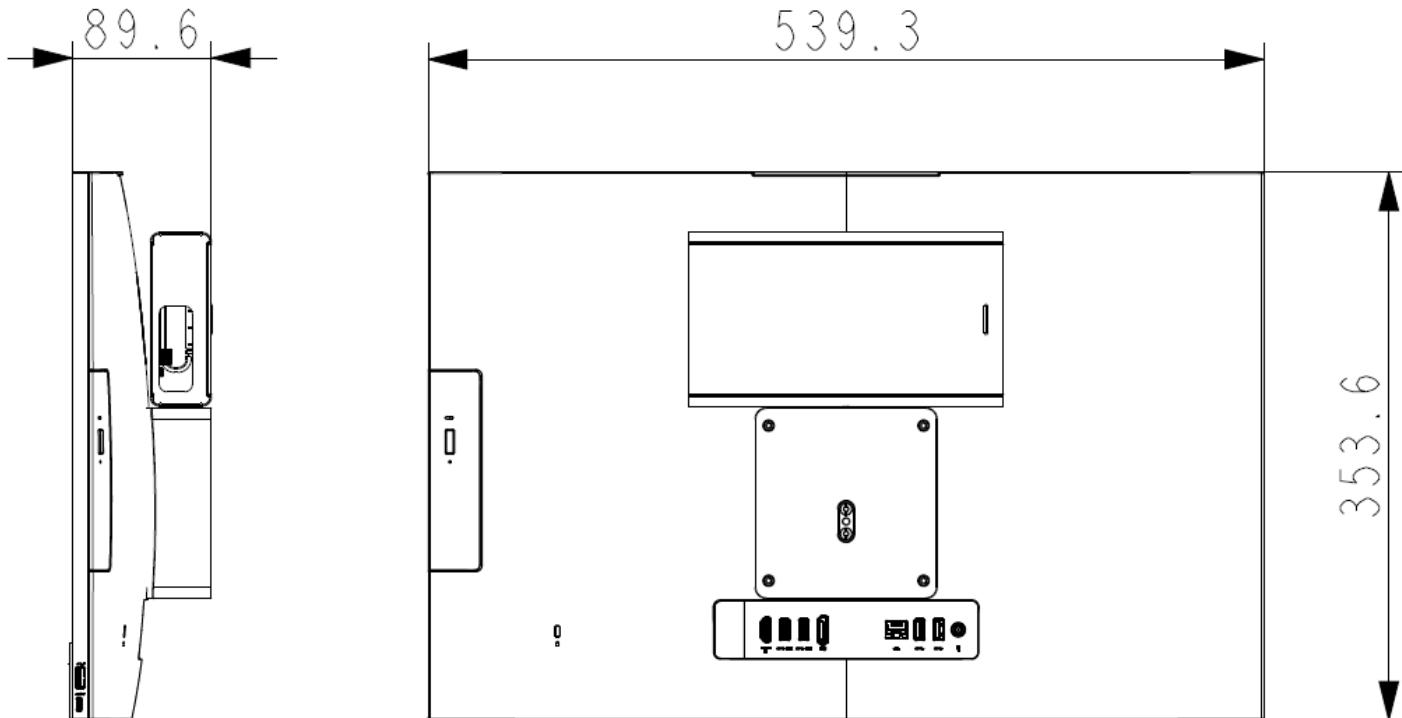

1. Landscape mode is only supported while using the VESA, Adjustable Height stand or Cantilever stand.

Technical Specifications – Graphics

GRAPHICS

HP Pro Mini 400 G9 Desktop PC

Intel® UHD Graphics (integrated)

Graphics Controller

Integrated

DisplayPort™

Multimode capable; supports HDCP, Display Port Audio, HBR2 link rates and Multi-Stream Technology for a maximum of 3 displays connected to any output controlled by Intel® Graphics

HDMI (on board/optional)

Supports HDMI 2.1 features

Supports HDCP 2.3

Supports audio over HDMI

VGA (optional)

VGA output

USB-C® DP Alt Mode(optional)

DisplayPort™ over the USB-C® module

Memory

The actual amount of maximum graphics memory can be >4GB. System memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.

Maximum Color Depth

up to 16 bits/color

Graphics/Video API Support

HEVC 10b Enc/12b Dec HW

VP9 12b Dec HW

HDR

Rec. 2020

DX12

Max. Resolution (HDMI)

4096 x 2160@60Hz

Max. Resolution (DP)

4096 x 2304@60Hz

Max Resolution (optional VGA)

2048 x 1536@60Hz

Max Resolution (optional DP)

5120 x 2160@60Hz

Max Resolution (optional HDMI)

3840 x 2160@60Hz

Technical Specifications – Graphics

HP Pro SFF 400 G9 Desktop PC

Intel® HD Graphics (integrated)

VGA Controller

DisplayPort™

HDMI (onboard / optional)

VGA (optional)

USB-C® DP Alt Mode (optional)

Memory

Maximum Color Depth

Graphics/Video API Support

Max. Resolution (VGA Option)

Max. Resolution (Onboard HDMI)

Max. Resolution (Option HDMI)

Max. Resolution (On board DP)

Max. Resolution (Option DP)

Max. Resolution (Option Type C)

Integrated

Multimode capable; supports HDCP, Display Port Audio, Onboard support HBR2 link rates/option DP support to HBR3 and Multi-Stream Technology for a maximum of 3 displays connected to any output controlled by Intel® Graphics

Supports HDMI 2.1 features (onboard HDMI support HDMI1.4; Option HDMI support HDMI 2.1)

Supports HDCP 2.3 (Support HDCP 1.4/2.3)

Supports audio over HDMI

VGA output

DisplayPort™ over the optional USB-C® module (Support DP1.4 HBR2)

The actual amount of maximum graphics memory can be >4GB. System memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.

up to 16 bits/color

HEVC 10b Enc/12b Dec HW

VP9 12b Dec HW à AV1 decode support 8/10b, 4:2:0

HDR

Rec. 2020

DX12

2048 x 1536@60Hz

1920 x 1080@60Hz

3840 x 2160@60Hz

HBR2: 4096 x 2304@60hz 24 bpp

HBR3: 5120 x3200 @60hz 24 bpp

DP HBR2: 4096 x2304 @60hz 24bpp

NVIDIA® Quadro T400 2GB Graphics Card

Engine Clock

Memory Clock

Memory Size (width)

Memory Type

Max. Resolution (DP)

Multi Display Support

HDCP Compliance

Rear I/O connectors (bracket)

Cooling (active/passive)

Total power consumption (W)

PCB form-factor with bracket

2100 MHz

5001 MHz

2GB (64-bit)

256M x 16 GDDR6

7680x4320@120Hz

3 displays

Yes

mDPx3

Active fan-sink (Active cooling with dynamic speed)

30W

LP PCB with LP bracket

NVIDIA® T400 4GB Graphics Card

Engine Clock

Memory Clock

Memory Size (width)

Memory Type

Max. Resolution (DP)

Multi Display Support

HDCP Compliance

Rear I/O connectors (bracket)

2100 MHz

5001 MHz

4GB (64-bit)

512M x 16 GDDR6

7680x4320@120Hz

3 displays

Yes

mDPx3

Technical Specifications – Graphics

| | |
|-------------------------------------|---|
| Cooling (active/passive) | Active fan-sink (Active cooling with dynamic speed) |
| Total power consumption (W) | 30W |
| PCB form-factor with bracket | LP PCB with LP bracket |

AMD Radeon™ RX 6300 2GB GDDR6 Graphics card

| | |
|--------------------------------------|---|
| Engine Clock | Base: 1512 Mhz Boost: 2040 Mhz |
| Memory Size / Width | 2GB / 32bit |
| Graphic Memory Type / Clock | 512Mx32 GDDR6 ,1 pcs / 16Gbps |
| Max. Resolution (HDMI) | 7680x4320@60Hz |
| Max. Resolution (DP) | 7680x4320@120Hz |
| Multi Display Support | 2 displays |
| HDCP Compliance | Yes |
| Rear I/O connectors (bracket) | HDMIx1+ DPx1 (LP) |
| Cooling (active/passive) | Active |
| Total power consumption (W) | 57W |
| Form-factor | X:160.2mm/Y:68.9mm/Z: 22.6mm PCB with single slot |

Technical Specifications – Graphics

HP Pro Tower 400 G9 Desktop PC

| | |
|--|---|
| Intel® HD Graphics (integrated) | Integrated |
| VGA Controller | Multimode capable; supports HDCP, Display Port Audio, Onboard support HBR2 link rates/option DP support to HBR3 and Multi-Stream Technology for a maximum of 3 displays connected to any output controlled by Intel® Graphics |
| DisplayPort™ | |
| HDMI (onboard / optional) | Supports HDMI 2.1 features (onboard HDMI support HDMI1.4; Option HDMI support HDMI 2.1) Supports HDCP 2.3 (Support HDCP 1.4/2.3) Supports audio over HDMI |
| VGA (optional) | VGA output |
| USB-C® DP Alt Mode (optional) | DisplayPort™ over the optional USB-C® module (Support DP1.4 HBR2) |
| Memory | The actual amount of maximum graphics memory can be >4GB. System memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use. |
| Maximum Color Depth | up to 16 bits/color |
| Graphics/Video API Support | HEVC 10b Enc/12b Dec HW VP9 12b Dec HW à AV1 decode support 8/10b, 4:2:0 HDR Rec. 2020 DX12 |
| Max. Resolution (VGA Option) | 2048 x 1536@60Hz |
| Max. Resolution (Onboard HDMI) | 1920 x 1080@60Hz |
| Max. Resolution (Option HDMI) | 3840 x 2160@60Hz |
| Max. Resolution (On board DP) | HBR2: 4096 x 2304@60hz 24 bpp |
| Max. Resolution (Option DP) | HBR3: 5120 x3200 @60hz 24 bpp |
| Max. Resolution (Option Type C) | DP HBR2: 4096 x2304 @60hz 24bpp |

NVIDIA® A400 4GB GDDR6 Graphics card

| | |
|--------------------------------------|---|
| GPU Clocks | Base: 1417 Mhz Boost: 1762 Mhz |
| Memory size / Bus Width | 4GB / 64 bits |
| Graphic Memory Type / Clock | 4GB GDDR6/6001MHz |
| Max. Resolution (DP1.4a) | 7680x4320 x24 bpp @120Hz/60Hz |
| Multi Display Support | 4 displays |
| HDCP Compliance | Yes |
| Rear I/O connectors (bracket) | mDPx4 |
| Cooling (active/passive) | Active |
| Total power consumption (W) | 50W |
| Form Factor | H: 2.7"(68.58mm) x L: 6.4"(162.56mm), single slot |

NVIDIA® Quadro T400 2GB Graphics Card

| | |
|--------------------------------------|---|
| Engine Clock | 2100 MHz |
| Memory Clock | 5001 MHz |
| Memory Size (width) | 2GB (64-bit) |
| Memory Type | 256M x 16 GDDR6 |
| Max. Resolution (DP) | 7680x4320@120Hz |
| Multi Display Support | 3 displays |
| HDCP Compliance | Yes |
| Rear I/O connectors (bracket) | mDPx3 |
| Cooling (active/passive) | Active fan-sink (Active cooling with dynamic speed) |

Technical Specifications – Graphics

| | |
|-------------------------------------|------------------------|
| Total power consumption (W) | 30W |
| PCB form-factor with bracket | LP PCB with LP bracket |

NVIDIA® T400 4GB Graphics Card

| | |
|--------------------------------------|---|
| Engine Clock | 2100 MHz |
| Memory Clock | 5001 MHz |
| Memory Size (width) | 4GB (64-bit) |
| Memory Type | 512M x 16 GDDR6 |
| Max. Resolution (DP) | 7680x4320@120Hz |
| Multi Display Support | 3 displays |
| HDCP Compliance | Yes |
| Rear I/O connectors (bracket) | mDPx3 |
| Cooling (active/passive) | Active fan-sink (Active cooling with dynamic speed) |
| Total power consumption (W) | 30W |
| PCB form-factor with bracket | LP PCB with LP bracket |

NVIDIA® GeForce® RTX 3050 8GB GDDR6 Graphics Card

| | |
|--------------------------------------|--|
| Engine Clock | Base: 1515 Mhz Boost: 1755 Mhz |
| Frame Buffer Size / Width | 8GB/128bit |
| Graphic Memory Type / Clock | 512Mx32 GDDR6 @ 4 pcs/14Gbps |
| Max. Resolution (HDMI) | 7680x4320@60Hz |
| Max. Resolution (DP) | 7680x4320@60Hz |
| Multi Display Support | 4 displays |
| HDCP Compliance | Yes |
| Rear I/O connectors (bracket) | HDMIx1+ DPx3 |
| Cooling (active/passive) | Active fansink with 4 pin fan control |
| Total power consumption (W) | 120W |
| Form-factor | ATX (X:144.7mm/Y:111.15mm/Z: 36.70mm) PCB with ATX dual slot bracket |

NOTE: PCIe 2x4 power connector requires for RTX3050 with 400W PSU

Technical Specifications – Graphics

Intel® Arc™ A380 6GB GDDR6 Graphics card⁴

| | |
|--------------------------------------|-----------------------|
| Engine Clock | 2150Mhz |
| Frame Buffer Size / Width | 6GB/96bit |
| Graphic Memory Type / Clock | GDDR6 ,3 pcs/15.5Gbps |
| Max. Resolution (HDMI) | 4096 x2160@60Hz |
| Max. Resolution (DP) | 7680x4320@60Hz |
| Multi Display Support | 4 displays |
| HDCP Compliance | Yes |
| Rear I/O connectors (bracket) | DP x3 + HDMI x1 |
| Cooling (active/passive) | Active |
| Total power consumption (W) | 75W |

AMD Radeon™ RX 6300 2GB GDDR6 Graphics card

| | |
|--------------------------------------|---|
| Engine Clock | Base: 1512 Mhz Boost: 2040 Mhz |
| Memory Size / Width | 2GB / 32bit |
| Graphic Memory Type / Clock | 512Mx32 GDDR6 ,1 pcs / 16Gbps |
| Max. Resolution (HDMI) | 7680x4320@60Hz |
| Max. Resolution (DP) | 7680x4320@120Hz |
| Multi Display Support | 2 displays |
| HDCP Compliance | Yes |
| Rear I/O connectors (bracket) | HDMIx1+ DPx1 (LP) |
| Cooling (active/passive) | Active |
| Total power consumption (W) | 57W |
| Form-factor | X:160.2mm/Y:68.9mm/Z: 22.6mm PCB with single slot |

Technical Specifications – Graphics

HP ProOne 440 23.8 inch G9 All-in-One Desktop PC

| | |
|--|---|
| Intel® UHD Graphics (integrated) | Integrated |
| Graphics Controller | Multimode capable; supports HDCP, Display Port Audio, HBR2 link rates and Multi-Stream Technology for a maximum of 3 displays connected to any output controlled by Intel® Graphics |
| DisplayPort™ | |
| HDMI (onboard / optional) | Supports HDMI 2.1 features Supports HDCP 2.3 Supports audio over HDMI |
| USB-C® DP Alt Mode (optional) | DisplayPort™ over the USB-C® module |
| Memory | The actual amount of maximum graphics memory can be >4GB. System memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use. |
| Maximum Color Depth | up to 16 bits/color |
| Graphics/Video API Support | HEVC 10b Enc/12b Dec HW VP9 12b Dec HW HDR Rec. 2020 DX12 |
| Max. Resolution (HDMI) | 4096 x 2160@60Hz |
| Max. Resolution (DP) | 4096 x 2304@60Hz |
| Max. Resolution (Optional VGA) | 2048 x 1536@60Hz |
| Max. Resolution (Optional DP) | 5120 x 2160@60Hz |
| Max. Resolution (Optional HDMI) | 3840 x 2160@60Hz |

AMD Radeon™ RX 6300 2GB GDDR6 Graphics card

| | |
|------------------------------------|--------------------------------|
| Engine Clock | Base: 1512 Mhz Boost: 2040 Mhz |
| Memory Size / Width | 2GB / 32bit |
| Graphic Memory Type / Clock | 512Mx32 GDDR6, 1 pcs / 16Gbps |
| HDCP Compliance | Yes |
| Total power consumption (W) | 25W |

Technical Specifications – Storage

STORAGE

NOTE: Starting from November 1st, 2023, all shipments will require Windows to be installed when selecting a SSD. HDD can only be configured as additional data drives and not as the boot drive.

1TB 7200RPM 3.5in SATA HDD

| | |
|------------------------------|---|
| Capacity | 1TB |
| Rotational Speed | 7,200 rpm |
| Interface | SATA 6 Gb/s |
| Buffer Size | 64MB |
| Logical Blocks | 1,953,525,168 |
| Seek Time | 11 ms (Average) |
| Height | 1in/2.54cm |
| Width (nominal) | Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm |
| Operating Temperature | 41° to 131° F (5° to 55° C) |

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

2TB 7200RPM 3.5in SATA HDD

| | |
|------------------------------|---|
| Capacity | 2TB |
| Rotational Speed | 7,200 rpm |
| Interface | SATA 6 Gb/s |
| Buffer Size | 128MB |
| Logical Blocks | 3,907,050,336 |
| Seek Time | 11 ms (Average) |
| Height | 1.028in/26.11mm |
| Width (nominal) | Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm |
| Operating Temperature | 41° to 131° F (5° to 55° C) |

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

1TB 7200RPM 2.5in SATA HDD

| | |
|------------------------------|-----------------------------|
| Capacity | 1TB |
| Rotational Speed | 7,200 rpm |
| Interface | SATA 6 Gb/s |
| Buffer Size | Up to 128MB |
| Logical Blocks | 1,953,525,168 |
| Seek Time | 12 ms (Average) |
| Height | 0.283 in/7.2 mm (Max) |
| Width (nominal) | 2.75 in/70 mm (nominal) |
| Operating Temperature | 41° to 131° F (5° to 55° C) |

Technical Specifications – Storage

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

256GB M.2 2280 PCIe NVMe SSD Value

| | |
|---------------------------------|------------------|
| Capacity | 256GB |
| Interface | PCIe NVMe Gen4X4 |
| Minimum Sequential Read | 3000 MB/s ±10% |
| Minimum Sequential Write | 1700 MB/s ±10% |
| Logical Blocks | 500,118,192 |
| Features | TRIM; L1.2 |

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

512GB M.2 2280 PCIe NVMe SSD Value

| | |
|---------------------------------|------------------|
| Capacity | 512GB |
| Interface | PCIe NVMe Gen4X4 |
| Minimum Sequential Read | 3000 MB/s ±10% |
| Minimum Sequential Write | 1800 MB/s ±10% |
| Logical Blocks | 1,000,215,216 |
| Features | TRIM; L1.2 |

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

1TB M.2 2280 PCIe NVMe SSD Value

| | |
|---------------------------------|------------------|
| Capacity | 1TB |
| Interface | PCIe NVMe Gen4X4 |
| Minimum Sequential Read | 3500 MB/s ±10% |
| Minimum Sequential Write | 2500 MB/s ±10% |
| Logical Blocks | 2,000,409,264 |
| Features | TRIM; L1.2 |

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

256GB M.2 2280 PCIe NVMe Three Layer Cell SSD

| | |
|---------------------------------|------------------------|
| Capacity | 256GB |
| Interface | PCIE Gen4x4 |
| Minimum Sequential Read | 4000 MB/s ±10% |
| Minimum Sequential Write | 2000 MB/s ±10% |
| Logical Blocks | 500,118,192 |
| Features | TRIM; L1.2; Pyrite 2.0 |

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

Technical Specifications – Storage

512GB M.2 2280 PCIe NVMe Three Layer Cell SSD

| | |
|---------------------------------|------------------------|
| Capacity | 512GB |
| Interface | PCIE Gen4x4 |
| Minimum Sequential Read | 6400 MB/s ±10% |
| Minimum Sequential Write | 3500 MB/s ±10% |
| Logical Blocks | 1,000,215,216 |
| Features | TRIM; L1.2; Pyrite 2.0 |

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

1TB M.2 2280 PCIe NVMe Three Layer Cell SSD

| | |
|---------------------------------|------------------------|
| Capacity | 1TB |
| Interface | PCIE Gen4x4 |
| Minimum Sequential Read | 6400 MB/s ±10% |
| Minimum Sequential Write | 5000 MB/s ±10% |
| Logical Blocks | 2,000,409,264 |
| Features | TRIM; L1.2; Pyrite 2.0 |

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

2TB M.2 2280 PCIe NVMe Three Layer Cell SSD

| | |
|---------------------------------|------------------------|
| Capacity | 2TB |
| Interface | PCIE Gen4x4 |
| Minimum Sequential Read | 6400 MB/s ±10% |
| Minimum Sequential Write | 5000 MB/s ±10% |
| Logical Blocks | 4,000,797,360 |
| Features | TRIM; L1.2; Pyrite 2.0 |

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

256GB M.2 2280 PCIe NVMe Self Encrypted OPAL2 Value SSD

| | |
|---------------------------------|------------------------|
| Capacity | 256GB |
| Interface | PCIE NVMe |
| Minimum Sequential Read | 2000 MB/s ±10% |
| Minimum Sequential Write | 900 MB/s ±10% |
| Logical Blocks | 500,118,192 |
| Features | Pyrite 2.0; TRIM; L1.2 |

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

Technical Specifications – Storage

256GB M.2 2280 PCIe NVMe Self Encrypted OPAL2 Three Layer Cell SSD

| | |
|---------------------------------|--------------------------|
| Capacity | 256GB |
| Interface | PCIE Gen4x4 |
| Minimum Sequential Read | 4000 MB/s ±10% |
| Minimum Sequential Write | 2000 MB/s ±10% |
| Logical Blocks | 500,118,192 |
| Features | TRIM; L1.2; TCG Opal 2.0 |

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

512GB M.2 2280 PCIe NVMe Self Encrypted OPAL2 Three Layer Cell SSD

| | |
|---------------------------------|--------------------------|
| Capacity | 512GB |
| Interface | PCIE Gen4x4 |
| Minimum Sequential Read | 6400 MB/s ±10% |
| Minimum Sequential Write | 3500 MB/s ±10% |
| Logical Blocks | 1,000,215,216 |
| Features | TRIM; L1.2; TCG Opal 2.0 |

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

HP 9.5mm Slim DVD-ROM Drive

| | |
|--|--|
| Height | 9.5 mm height |
| Orientation | Either horizontal or vertical |
| Interface type | SATA/ATAPI |
| Dimensions (W x H x D) | 5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel |
| Weight (max) | Up to 0.31 lb (140g) without bezel |
| Read Speeds | DVD+R/-R/+RW/ -RW/+R DL /-R DL Up to 8X DVD-ROM Up to 8X CD-ROM, CD-R Up to 24X CD-RW Up to 24X |
| Access time (typical reads, including settling) | Random: DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical) Full stroke: DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical) |
| Power | Source Slimline SATA DC power receptacle DC Power Requirement 5 VDC ± 5%-100 mV ripple p-p DC Current 5 VDC (< 1000 mA typical, 1600 mA maximum) |
| Environmental conditions (operating - non-condensing) | Temperature 41° to 122° F (5° to 50° C) Relative Humidity 10% to 80% Maximum Wet Bulb Temperature 84° F (29° C) |

Technical Specifications – Storage

HP 9.5mm Slim DVD Writer Drive

| | |
|--|--|
| Height | 9.5 mm height |
| Orientation | Either horizontal or vertical |
| Interface type | SATA/ATAPI |
| Dimensions (W x H x D) | 5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel |
| Weight (max) | Up to 0.31 lb (140 g) Without bezel |
| Write Speeds | DVD-R DL - Up to 6X DVD+R - Up to 8X DVD+RW - Up to 8X DVD+R DL - Up to 6X DVD-R - Up to 8X DVD-RW - Up to 6X CD-R - Up to 24X CD-RW - Up to 10X |
| Read Speeds | DVD-RW, DVD+RW - Up to 8X DVD-R DL, DVD+R DL - Up to 8X DVD+R, DVD-R - Up to 8X DVD-ROM DL, DVD-ROM - Up to 8X CD-ROM, CD-R - Up to 24X CD-RW - Up to 24X |
| Access time (typical reads, including settling) | Random DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical) Full Stroke DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical) Stop Time 6 seconds (typical) |
| Power | Source Slimline SATA DC power receptacle DC Power Requirement 5 VDC ± 5%-100 mV ripple p-p DC Current 5 VDC (< 1000 mA typical, 1600 mA maximum) |
| Environmental conditions (operating - non-condensing) | Temperature 41° to 122° F (5° to 50° C) Relative Humidity 10% to 80% Maximum Wet Bulb Temperature 84° F (29° C) |

Technical Specifications – Networking

NETWORKING AND COMMUNICATIONS

| Intel® I219-LM 1 Gigabit Network Connection LOM (vPro®) | |
|--|--|
| Connector | RJ-45 |
| System Interface | PCI (Intel® proprietary) + SMBus |
| Data rates supported | 10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 802.3 clauses 40) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s |
| IEEE Compliance | IEEE 802.1p QoS (Quality of Service) Support IEEE 802.1q VLAN support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable) IEEE 802.3az EEE (Energy Efficient Ethernet) |
| Performance | TCP/IP/UDP Checksum Offload (configurable) Protocol Offload (ARP & NS) Large send offload and Giant send offload Receiving Side Scaling (Hash Mode Only) Jumbo Frame 9K |
| Power consumption | Cable Disconnection: 25mW 100Mbps Full Run: 450mW 1000bp Full Run: 1000mW WoL Enable (S3/S4/S5): 50mW WoL Disable (S3/S4/S5): 25mW |
| Power Management | ACPI compliant – multiple power modes Situation-sensitive features reduce power consumption Advanced link down power saving for reducing link down power consumption |
| Management Interface | Auto MDI/MDIX Crossover cable detection |
| IT Manageability | Wake-on-LAN from modern standby or sleep state (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only), <u>Microsoft Windows Fast Startup must be disabled</u> . PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status |
| Security & Manageability | Intel® vPro® support with appropriate Intel® chipset components |

Technical Specifications – Networking

| Network Adapter Intel FoxPond1 I225-T1 2.5GbE | |
|--|--|
| Connector | RJ-45 |
| System Interface | PCI (Intel® proprietary) + SMBus |
| Data rates supported | 1. 10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 2. 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 3. 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 802.3 clauses 40) 4. 2.5 Gbit/s operation (2.5GBASE-T; IEEE 802.3bz Clause 126) 5. Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10, 100 & 1000 Mbit/s |
| IEEE Compliance | IEEE 802.1p QoS (Quality of Service) Support IEEE 802.1q VLAN support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable) IEEE 802.3az EEE (Energy Efficient Ethernet) IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BAE-T IEEE 802.3bz 2.5GBASE-T |
| Performance | TCP/IP/UDP Checksum Offload (configurable) Protocol Offload (ARP & NS) Large send offload and Giant send offload Receiving Side Scaling (Hash Mode Only) Jumbo Frame 9K |
| Power consumption | Cable Disconnection: 25mW 100Mbps Full Run: 450mW 1000bp Full Run: 1000mW WoL Enable (S3/S4/S5): 50mW WoL Disable (S3/S4/S5): 25mW |
| Power Management | ACPI compliant – multiple power modes Situation-sensitive features reduce power consumption Advanced link down power saving for reducing link down power consumption |
| Management Interface | Auto MDI/MDIX Crossover cable detection |
| IT Manageability | Wake-on-LAN from modern standby or sleep state (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only), <u>Microsoft Windows Fast Startup must be disabled</u> . PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status |

Technical Specifications – Networking

| Intel I226-T1 2.5GbE Ethernet Network Adapter | |
|--|--|
| Connector | RJ-45 |
| System Interface | PCI (Intel proprietary) + SMBus |
| Data rates supported | 1. 10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 2. 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 3. 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 802.3 clauses 40) 4. 2.5 Gbit/s operation (2.5GBASE-T; IEEE 802.3bz Clause 126) 5. Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 & 100 Mbit/s |
| IEEE Compliance | IEEE 802.1p QoS (Quality of Service) Support IEEE 802.1q VLAN support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable) IEEE 802.3az EEE (Energy Efficient Ethernet) IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BAE-T IEEE 802.3bz 2.5GBASE-T |
| Performance | TCP/IP/UDP Checksum Offload (configurable) Protocol Offload (ARP & NS) Large send offload and Giant send offload Receiving Side Scaling(Hash Mode Only) Jumbo Frame 9K |
| Power consumption | Cable Disconnection: 25mW 100Mbps Full Run: 450mW 1000Mbps Full Run: 1000mW 2500Mbps Full Run: 4500mW WoL Enable(S3/S4/S5): 50mW WoL Disable(S3/S4/S5): 25mW |
| Power | ACPI compliant – multiple power modes |
| Management | Situation-sensitive features reduce power consumption Advanced link down power saving for reducing link down power consumption |
| Management Interface | Auto MDI/MDIX Crossover cable detection |
| IT Manageability | Wake-on-LAN from modern standby or sleep state (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status |

Technical Specifications – Networking

| Realtek 802.11a/b/g/n/ac (1x1) Wi-Fi® and Bluetooth® 4.2 wireless card¹ | |
|---|---|
| Wireless LAN Standards | IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac IEEE 802.11d IEEE 802.11e IEEE 802.11h IEEE 802.11i IEEE 802.11k IEEE 802.11r IEEE 802.11v |
| Interoperability | Wi-Fi® certified modules |
| Frequency Band | 802.11b/g/n • 2.402 – 2.482 GHz 802.11a/n/ac • 4.9 – 4.95 GHz (Japan) • 5.15 – 5.25 GHz • 5.25 – 5.35 GHz • 5.47 – 5.725 GHz • 5.825 – 5.850 GHz |
| Data Rates | • 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: max 150Mbps • 802.11ac: max 433.3Mbps |
| Modulation | Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM |
| Security² | • IEEE and Wi-Fi® certified 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • WPA3 certification • IEEE 802.11i • WAPI |
| Network Architecture Models | Ad-hoc (Peer to Peer) Infrastructure (Access Point Required) |
| Roaming | IEEE 802.11 compliant roaming between access points |
| Output Power³ | • 802.11b: +14dBm minimum • 802.11g: +12dBm minimum • 802.11a: +12dBm minimum • 802.11n HT20(2.4GHz): +12dBm minimum • 802.11n HT40(2.4GHz): +12dBm minimum • 802.11n HT20(5GHz): +10dBm minimum • 802.11n HT40(5GHz): +10dBm minimum • 802.11ac VHT80(5GHz): +10dBm minimum |

Technical Specifications – Networking

| | |
|--|--|
| Power Consumption | <ul style="list-style-type: none"> Transmit mode 2.0 W Receive mode 1.6 W Idle mode (PSP) 180 mW (WLAN Associated) Idle mode 50 mW (WLAN unassociated) Connected Standby 10mW Radio disabled 8 mW |
| Power Management | ACPI and PCI Express compliant power management 802.11 compliant power saving mode |
| Receiver Sensitivity⁴ | 802.11b, 1Mbps: -93.5dBm maximum 802.11b, 11Mbps: -84dBm maximum 802.11a/g, 6Mbps: -86dBm maximum 802.11a/g, 54Mbps: -72dBm maximum 802.11n, MCS07: -67dBm maximum 802.11n, MCS15: -64dBm maximum 802.11ac, MCS0: -84dBm maximum 802.11ac, MCS9: -59dBm maximum |
| Antenna type | High efficiency antenna. One embedded dual band 2.4/5 GHz antenna is provided to the card to support WLAN communications and Bluetooth communications |
| Form Factor | PCI-Express M.2 MiniCard |
| Dimensions | Type 2230: 2.3 x 22.0 x 30.0 mm |
| Weight | Type 2230: 2.8g |
| Operating Voltage | 3.3v +/- 9% |
| Temperature | Operating: 14° to 158° F (-10° to 70° C) Non-operating: -40° to 176° F (-40° to 80° C) |
| Humidity | Operating: 10% to 90% (non-condensing) Non-operating: 5% to 95% (non-condensing) |
| Altitude | Operating: 0 to 10,000 ft (3,048 m) Non-operating: 0 to 50,000 ft (15,240 m) |
| LED Activity | LED Amber – Radio OFF; LED OFF – Radio ON |
| HP Integrated Module with Bluetooth® 4.0/4.1/4.2 wireless card Technology | |
| Bluetooth® Specification | 4.0/4.1/4.2 wireless card Compliant |
| Frequency Band | 2402 to 2480 MHz |
| Number of Available Channels | Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH) |
| Data Rates and Throughput | Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5) The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR. Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW |
| Transmit Power | USB 2.0 compliant |

Technical Specifications – Networking

| | |
|---|--|
| Power Consumption | Microsoft Windows Bluetooth Software |
| Bluetooth® Software Supported Link Topology | Microsoft Windows ACPI, and USB Bus Support |
| Power Management | FCC (47 CFR) Part 15C, Section 15.247 & 15.249 |
| Certifications | 4.0/4.1/4.2 Compliant |
| Power Management | ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 |
| Certifications | UL, CSA, and CE Mark |
| Bluetooth® Profiles Supported | BT4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan BT4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP) |
| <p>1. Wi-Fi 5 is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels. Wireless access point and internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 5 (802.11 ac) is backwards compatible with prior 802.11 specs.</p> <p>2. Check latest software/driver release for updates on supported security features.</p> <p>3. The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p> <p>4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</p> | |

Technical Specifications – Networking

| Realtek RTL8852BE 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3 wireless card (802.11ax 2x2, supporting gigabit data rate)¹ | |
|--|---|
| Wireless LAN Standards | IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac IEEE 802.11ax IEEE 802.11d IEEE 802.11e IEEE 802.11h IEEE 802.11i IEEE 802.11k IEEE 802.11r IEEE 802.11v |
| Interoperability | Wi-Fi® certified modules |
| Frequency Band | 802.11b/g/n/ax • 2.402 – 2.482 GHz 802.11a/n/ac/ax • 4.9 – 4.95 GHz (Japan) • 5.15 – 5.25 GHz • 5.25 – 5.35 GHz • 5.47 – 5.725 GHz • 5.825 – 5.850 GHz |
| Data Rates | • 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: max 300Mbps • 802.11ac: max 866.7Mbps • 802.11ax: max 1201Mbps |
| Modulation | Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM, 1024QAM |
| Security² | • IEEE and Wi-Fi® certified 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x, WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • WPA3 certification • IEEE 802.11i • WAPI |
| Network Architecture Models | Ad-hoc (Peer to Peer) Infrastructure (Access Point Required) |
| Roaming | IEEE 802.11 compliant roaming between access points |
| Output Power³ | • 802.11b: +18.5dBm minimum • 802.11g: +17.5dBm minimum • 802.11a: +18.5dBm minimum • 802.11n HT20(2.4GHz): +15.5dBm minimum • 802.11n HT40(2.4GHz): +14.5dBm minimum • 802.11n HT20(5GHz): +15.5dBm minimum • 802.11n HT40(5GHz): +14.5dBm minimum • 802.11ac VHT80(5GHz): +11.5dBm minimum |

Technical Specifications – Networking

| | |
|--|--|
| | <ul style="list-style-type: none"> • 802.11ax HE40(2.4GHz): +10dBm minimum • 802.11ax HE80(5GHz): +10dBm minimum |
| Power Consumption | <ul style="list-style-type: none"> • Transmit mode:2.5 W • Receive mode:2 W • Idle mode (PSP): 180 mW (WLAN Associated) • Idle mode:50 mW (WLAN unassociated) • Connected Standby/Modern Standby: 10mW • Radio disabled: 8 mW |
| Power Management | ACPI and PCI Express compliant power management 802.11 compliant power saving mode |
| Receiver Sensitivity⁴ | 802.11b, 1Mbps: -93.5dBm maximum 802.11b, 11Mbps: -84dBm maximum 802.11a/g, 6Mbps: -86dBm maximum 802.11a/g, 54Mbps: -72dBm maximum 802.11n, MCS07: -67dBm maximum 802.11n, MCS15: -64dBm maximum 802.11ac, MCS0: -84dBm maximum 802.11ac, MCS9: -59dBm maximum •802.11ax, MCS11(HE40): -57dBm maximum •802.11ax, MCS11(HE80): -54dBm maximum |
| Antenna type | High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications |
| Form Factor | PCI-Express M.2 MiniCard |
| Dimensions | 1. Type 2230: 2.3 x 22.0 x 30.0 mm 2. Type 1216: 1.67 x 12.0 x 16.0 mm |
| Weight | 1. Type 2230: 2.8g 2. Type 126: 1.3g |
| Operating Voltage | 3.3v +/- 9% |
| Temperature | Operating: 14° to 158° F (-10° to 70° C) Non-operating: -40° to 176° F (-40° to 80° C) |
| Humidity | Operating: 10% to 90% (non-condensing) Non-operating: 5% to 95% (non-condensing) |
| Altitude | Operating: 0 to 10,000 ft (3,048 m) Non-operating: 0 to 50,000 ft (15,240 m) |
| LED Activity | LED Amber – Radio OFF; LED OFF – Radio ON |
| HP Integrated Module with Bluetooth® 4.0/4.1/4.2/5.0/5.1/5.2/5.3 wireless card Technology | |
| Bluetooth® Specification | 4.0/4.1/4.2/5.0/5.1/5.2 /5.3 wireless card Compliant |
| Frequency Band | 2402 to 2480 MHz |
| Number of Available Channels | Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH) |
| Data Rates and Throughput | Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5) |

Technical Specifications – Networking

| | |
|--|---|
| Transmit Power | The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR. |
| Power Consumption | Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW |
| Electrical Interface | Microsoft Windows Bluetooth Software |
| Bluetooth® Software Supported Link Topology | Microsoft Windows ACPI, and USB Bus Support |
| Power Management | FCC (47 CFR) Part 15C, Section 15.247 & 15.249 |
| Certifications | ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW |
| Power Management Certifications | Microsoft Windows Bluetooth Software |
| Bluetooth® Profiles Supported | BT4.1 -ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan BT4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP) BT5.1 ESR9/10 Compliance LE Advertisement Extensions Channel Selection Algo Limited High Duty Cycle Non-Connectable Advertising 2Mbps LE LE Long Range |

1. Wi-Fi 6 is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels.
 2. Check latest software/driver release for updates on supported security features.
 3. The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.
 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

Technical Specifications – Networking

| Intel® AX211 Wi-Fi 6E +Bluetooth® 5.3 wireless card M.2 160MHz CNVi WW WLAN¹ | |
|--|---|
| Wireless LAN Standards | IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac IEEE 802.11ax IEEE 802.11d IEEE 802.11e IEEE 802.11h IEEE 802.11i IEEE 802.11k IEEE 802.11r IEEE 802.11v |
| Interoperability | Wi-Fi® certified |
| Frequency Band | 802.11b/g/n/ax • 2.402 – 2.482 GHz 802.11a/n/ac/ax • 4.9 – 4.95 GHz (Japan) • 5.15 – 5.25 GHz • 5.25 – 5.35 GHz • 5.47 – 5.725 GHz • 5.825 – 5.850 GHz • 5.955 – 6.415 GHz • 6.435 – 6.515 GHz • 6.535 – 6.875 GHz • 6.895 – 7.115 GHz |
| Data Rates | • 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: max 300Mbps • 802.11ac: 1733Mbps • 802.11ax: max 2.4Gbps |
| Modulation | Direct Sequence Spread Spectrum OFDM, BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM , 1024QAM |
| Security² | • IEEE and Wi-Fi® compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • WPA3 certification • IEEE 802.11i • WAPI |
| Network Architecture Models | Ad-hoc (Peer to Peer) Infrastructure (Access Point Required) |
| Roaming | IEEE 802.11 compliant roaming between access points |
| Output Power³ | • 802.11b: +17dBm minimum • 802.11g: +16dBm minimum • 802.11a: +17dBm minimum • 802.11n HT20(2.4GHz): +14dBm minimum |

Technical Specifications – Networking

| | |
|--|--|
| | <ul style="list-style-type: none"> • 802.11n HT40(2.4GHz): +13dBm minimum • 802.11n HT20(5GHz): +14dBm minimum • 802.11n HT40(5GHz): +13dBm minimum • 802.11ac VHT80(5GHz): +10dBm minimum • 802.11ac VHT160(5GHz): +10dBm minimum • 802.11ax HE40(2.4GHz): +12dBm minimum • 802.11ax HE80(5GHz): +10dBm minimum • 802.11ax HE160(5GHz): +10dBm minimum |
| Power Consumption | <ul style="list-style-type: none"> • Transmit mode 2.0 W • Receive mode 1.6 W • Idle mode (PSP) 180 mW (WLAN Associated) • Idle mode 50 mW (WLAN unassociated) • Connected Standby 10mW • Radio disabled 8 mW |
| Power Management | ACPI and PCI Express compliant power management 802.11 compliant power saving mode |
| Receiver Sensitivity⁴ | <ul style="list-style-type: none"> • 802.11b, 1Mbps: -93.5dBm maximum • 802.11b, 11Mbps: -84dBm maximum • 802.11a/g, 6Mbps: -86dBm maximum • 802.11a/g, 54Mbps: -72dBm maximum • 802.11n, MCS07: -67dBm maximum • 802.11n, MCS15: -64dBm maximum • 802.11ac, MCS0(VHT80): -84dBm maximum • 802.11ac, MCS9(VHT80): -59dBm maximum • 802.11ac, MCS9(VHT160): -58.5dBm maximum • 802.11ax, MCS11(HE40): -57dBm maximum • 802.11ax, MCS11(HE80): -54dBm maximum • 802.11ax, MCS11(HE160): -53.5dBm maximum |
| Antenna type | High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5/6 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications |
| Form Factor | PCI-Express M.2 MiniCard |
| Dimensions | 1. Type 2230: 2.3 x 22.0 x 30.0 mm 2. Type 1216: 1.67 x 12.0 x 16.0 mm |
| Weight | 1. Type 2230: 2.8g 2. Type 1216: 1.3g |
| Operating Voltage | 3.3v +/- 9% |
| Temperature | Operating: 14° to 158° F (-10° to 70° C) Non-operating: -40° to 176° F (-40° to 80° C) |
| Humidity | Operating: 10% to 90% (non-condensing) Non-operating: 5% to 95% (non-condensing) |
| Altitude | Operating: 0 to 10,000 ft (3,048 m) Non-operating: 0 to 50,000 ft (15,240 m) |
| LED Activity | LED Amber – Radio OFF; LED OFF – Radio ON |
| HP Integrated Module with Bluetooth® 4.0/4.1/4.2/5.0/5.1/5.2/5.3 wireless card Technology | |
| Bluetooth® Specification | 4.0/4.1/4.2/5.0/5.1/5.2 5.3 wireless card Compliant |
| Frequency Band | 2402 to 2480 MHz |
| Number of Available Channels | Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH) |
| Data Rates and Throughput | Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps |

Technical Specifications – Networking

| | |
|--|--|
| | Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5) |
| Transmit Power | The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 9.5 dBm for BR and EDR. |
| Power Consumption | Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW |
| Bluetooth® Software Supported Link Topology | Microsoft Windows Bluetooth Software |
| Power Management | Microsoft Windows ACPI, and USB Bus Support |
| Certifications | FCC (47 CFR) Part 15C, Section 15.247 & 15.249 |
| Power Management Certifications | ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark |
| Bluetooth® Profiles Supported | BT4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan BT4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP) BT5.2 ESR9/10 Compliance LE Advertisement Extensions Channel Selection Algo Limited High Duty Cycle Non-Connectable Advertising 2Mbps LE LE Long Range |

1. Wi-Fi 6E requires a Wi-Fi 6E router, sold separately, to function in the 6GHz band. Availability of public wireless access points limited. Wi-Fi 6E is backwards compatible with prior 802.11 specs. And available in countries where Wi-Fi 6E is supported. Wi-Fi 6E is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels.

2. Check latest software/driver release for updates on supported security features.

3. The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.

4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

5. Usage of the 6GHz band relies on Windows 11 Operating System support.

Technical Specifications – Networking

Intel® AX211 Wi-Fi 6E + Bluetooth® 5.3 wireless card M.2 vPro® 160MHz CNVi WW WLAN¹

| | |
|------------------------------------|---|
| Wireless LAN Standards | IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac IEEE 802.11ax IEEE 802.11d IEEE 802.11e IEEE 802.11h IEEE 802.11i IEEE 802.11k IEEE 802.11r IEEE 802.11v |
| Interoperability | Wi-Fi certified |
| Frequency Band | 802.11b/g/n/ax • 2.402 – 2.482 GHz 802.11a/n/ac/ax • 4.9 – 4.95 GHz (Japan) • 5.15 – 5.25 GHz • 5.25 – 5.35 GHz • 5.47 – 5.725 GHz • 5.825 – 5.850 GHz • 5.955 – 6.415 GHz • 6.435 – 6.515 GHz • 6.535 – 6.875 GHz • 6.895 – 7.115 GHz |
| Data Rates | • 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: max 300Mbps • 802.11ac: 1733Mbps • 802.11ax: max 2.4Gbps |
| Modulation | Direct Sequence Spread Spectrum OFDM, BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM , 1024QAM |
| Security² | • IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • WPA3 certification • IEEE 802.11i • WAPI |
| Network Architecture Models | Ad-hoc (Peer to Peer) Infrastructure (Access Point Required) |
| Roaming | IEEE 802.11 compliant roaming between access points |
| Output Power³ | • 802.11b: +17dBm minimum • 802.11g: +16dBm minimum • 802.11a: +17dBm minimum • 802.11n HT20(2.4GHz): +14dBm minimum • 802.11n HT40(2.4GHz): +13dBm minimum • 802.11n HT20(5GHz): +14dBm minimum • 802.11n HT40(5GHz): +13dBm minimum |

Technical Specifications – Networking

| | |
|---|--|
| | <ul style="list-style-type: none"> • 802.11ac VHT80(5GHz): +10dBm minimum • 802.11ac VHT160(5GHz): +10dBm minimum • 802.11ax HE40(2.4GHz): +12dBm minimum • 802.11ax HE80(5GHz): +10dBm minimum • 802.11ax HE160(5GHz): +10dBm minimum |
| Power Consumption | <ul style="list-style-type: none"> • Transmit mode 2.0 W • Receive mode 1.6 W • Idle mode (PSP) 180 mW (WLAN Associated) • Idle mode 50 mW (WLAN unassociated) • Connected Standby 10mW • Radio disabled 8 mW |
| Power Management | ACPI and PCI Express compliant power management 802.11 compliant power saving mode |
| Receiver Sensitivity⁴ | <ul style="list-style-type: none"> • 802.11b, 1Mbps: -93.5dBm maximum • 802.11b, 11Mbps: -84dBm maximum • 802.11a/g, 6Mbps: -86dBm maximum • 802.11a/g, 54Mbps: -72dBm maximum • 802.11n, MCS07: -67dBm maximum • 802.11n, MCS15: -64dBm maximum • 802.11ac, MCS0(VHT80): -84dBm maximum • 802.11ac, MCS9(VHT80): -59dBm maximum • 802.11ac, MCS9(VHT160): -58.5dBm maximum • 802.11ax, MCS11(HE40): -57dBm maximum • 802.11ax, MCS11(HE80): -54dBm maximum • 802.11ax, MCS11(HE160): -53.5dBm maximum |
| Antenna type | <p>High efficiency antenna with spatial diversity, mounted in the display enclosure</p> <p>Two embedded dual band 2.4/5/6 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications</p> |
| Form Factor | PCI-Express M.2 MiniCard |
| Dimensions | <p>1. Type 2230: 2.3 x 22.0 x 30.0 mm</p> <p>2. Type 1216: 1.67 x 12.0 x 16.0 mm</p> |
| Weight | <p>1. Type 2230: 2.8g</p> <p>2. Type 1216: 1.3g</p> |
| Operating Voltage | 3.3v +/- 9% |
| Temperature | <p>Operating: 14° to 158° F (-10° to 70° C)</p> <p>Non-operating: -40° to 176° F (-40° to 80° C)</p> |
| Humidity | <p>Operating: 10% to 90% (non-condensing)</p> <p>Non-operating: 5% to 95% (non-condensing)</p> |
| Altitude | <p>Operating: 0 to 10,000 ft (3,048 m)</p> <p>Non-operating: 0 to 50,000 ft (15,240 m)</p> |
| LED Activity | LED Amber – Radio OFF; LED OFF – Radio ON |
| HP Integrated Module with Bluetooth® 4.0/4.1/4.2/5.0/5.1/5.2 /5.3 wireless card Technology | |
| Bluetooth® Specification | 4.0/4.1/4.2/5.0/5.1/5.2/5.3 wireless card Compliant |
| Frequency Band | 2402 to 2480 MHz |
| Number of Available Channels | Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH) |
| Data Rates and Throughput | <p>Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps</p> <p>BLE: 1 Mbps data rate; throughput up to 0.2 Mbps</p> <p>Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels</p> <p>Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)</p> |

Technical Specifications – Networking

| | |
|--|--|
| Transmit Power | The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 9.5 dBm for BR and EDR. |
| Power Consumption | Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW |
| Bluetooth® Software Supported Link Topology | Microsoft Windows Bluetooth Software |
| Power Management | Microsoft Windows ACPI, and USB Bus Support |
| Certifications | FCC (47 CFR) Part 15C, Section 15.247 & 15.249 |
| Power Management Certifications | ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark |
| Bluetooth® Profiles Supported | BT4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan BT4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP) BT5.2 ESR9/10 Compliance LE Advertisement Extensions Channel Selection Algo Limited High Duty Cycle Non-Connectable Advertising 2Mbps LE LE Long Range |

1. Wi-Fi 6E requires a Wi-Fi 6E router, sold separately, to function in the 6GHz band. Availability of public wireless access points limited. Wi-Fi 6E is backwards compatible with prior 802.11 specs. And available in countries where Wi-Fi 6E is supported. Wi-Fi 6E is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels.

2. Check latest software/driver release for updates on supported security features.

3. The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.

4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

5. Usage of the 6GHz band relies on Windows 11 Operating System support.

Technical Specifications – Input/Output Devices

I/O DEVICES

| HP Business Slim Standalone USB/PS2 Wired Keyboard | | |
|--|--|---|
| Physical Characteristics | Keys | 104, 105, 106, 107, 109 layout (depending upon country) |
| | Dimensions (L x W x H) | 171.97 x 68.35 x 8.27 in (436.8± 1.5 x 137.6± 1.0 x 21.0± 1.0 cm) |
| | Weight | 1.32 lb (0.6± 0.08 kg) |
| Electrical | Operating voltage | 4.4-5.25VDC |
| | Power consumption | 50-mA maximum (with 5 VDC power supplied and three LEDs ON)/ |
| | System interface | USB or PS/2 |
| | ESD | Contact Discharge: 2, 4,6,8KV Air Discharge: 2, 4, 8,10,12.5KV |
| | EMI – RFI | Conforms to FCC rules for a Class B computing device |
| Mechanical | Keycaps | Low-profile design |
| | Switch actuation | 60±12.5g nominal peak force with tactile feedback |
| | Switch life | 10 million keystrokes (Life tester) |
| | Switch type | Contamination-resistant switch membrane |
| | Key-leveling mechanisms | For all double-wide and greater-length keys |
| | Cable length | 6 ft (1.8 m) |
| Environmental | Acoustics | 43-dBA maximum sound pressure level |
| | Operating temperature | 50° to 122° F (10° to 50° C) |
| | Non-operating temperature | Minus 30 degrees to 60 degrees Celsius |
| | Operating humidity | 10% to 90% (non-condensing at ambient) |
| | Non-operating humidity | 20% to 80% (non-condensing at ambient) |
| | Operating shock | 40 g, six surfaces |
| | Non-operating shock | 80 g, six surfaces |
| | Operating vibration | 2-g peak acceleration |
| | Non-operating vibration | 4-g peak acceleration |
| | Drop (out of box) | 26 in (66 cm) on carpet, six-drop sequence |
| | Drop (in box) | 30 in (76.2 cm) on concrete, 16-drop sequence |
| Approvals | UL, FCC, CE Mark, TUV GS, VCCI, BSMI, RCM, KCC | |
| Ergonomic compliance | ANSI HFS 100, ISO 9241-4, and TUVGS | |

Technical Specifications – Input/Output Devices

| HP USB Business Slim Wired SmartCard CCID Keyboard | | |
|--|---|--|
| Physical Characteristics | Keys | 104, 105, 107, 109 layout (depending upon country) |
| | Dimensions (L x W x H) | 17.34 x 5.68 x 0.78in (440.6 x 144.5 x 1.98 cm) |
| | Weight | 1.32 lb (598g) |
| Electrical | Operating voltage | 5 VDC, +/-5% |
| | Power consumption | 100mA (All LED on) |
| | System interface | USB Type A plug connector |
| | ESD | Contact Discharge: 8 KV Air Discharge: 12.5 KV |
| | EMI - RFI | Conforms to FCC rules for a Class B computing device |
| Mechanical | Keycaps | Low-profile design |
| | Switch actuation | 60±10g nominal peak force with tactile feedback |
| | Switch life | 10 million keystrokes (Life tester) |
| | Switch type | Contamination-resistant switch membrane |
| | Key-leveling mechanisms | For all double-wide and greater-length keys |
| | Cable length | 6 ft (1.8 m) |
| Environmental | Acoustics | 43-dBA maximum sound pressure level |
| | Operating temperature | 50° to 122° F (10° to 50° C) |
| | Non-operating temperature | -22° to 140° F (-30° to 60° C) |
| | Operating humidity | 10% to 90% (non-condensing at ambient) |
| | Non-operating humidity | 20% to 80% (non-condensing at ambient) |
| | Operating shock | 40 g, six surfaces |
| | Non-operating shock | 80 g, six surfaces |
| | Operating vibration | 2-g peak acceleration |
| | Non-operating vibration | 4-g peak acceleration |
| | Drop (out of box) | 26 in (66 cm) on carpet, six-drop sequence |
| Approvals | Drop (in box) | |
| | 30 in (76.2 cm) on concrete, 16-drop sequence | |
| Ergonomic compliance | ISO 9241-4, TUVGS | |

Technical Specifications – Input/Output Devices

| HP 125 (AntiMicrobial) Wired Keyboard (China only) | | |
|---|--|--|
| Physical Characteristics | Keys | 104/105/107/109 layout (depending upon country) |
| | Dimensions (L x W x H) | 436 x 138 x 24.7 mm |
| | Weight | 471g |
| Electrical | Operating voltage | 5V +- 5% |
| | Power consumption | 50mA |
| | System interface | USB Type A plug connector |
| | ESD | Contact Discharge: 8 KV Air Discharge: 12.5 KV |
| | EMI - RFI | Conforms to FCC rules for a Class B computing device |
| Mechanical | Keycaps | Low-profile design |
| | Switch actuation | 55±10g nominal peak force with tactile feedback |
| | Switch life | 10 million keystrokes (Life tester) |
| | Switch type | Contamination-resistant switch membrane |
| | Key-leveling mechanisms | For all double-wide and greater-length keys |
| | Cable length | 1.8 m |
| Environmental | Acoustics | 43-dBA maximum sound pressure level |
| | Operating temperature | 50° to 122° F (10° to 50° C) |
| | Non-operating temperature | -4° to 149° F (-20° to 65° C) |
| | Operating humidity | 10% to 95% (non-condensing at ambient) |
| | Non-operating humidity | 0% to 95% (non-condensing at ambient) |
| | Operating shock | 40 g, six surfaces |
| | Non-operating shock | 80 g, six surfaces |
| | Operating vibration | 2-g peak acceleration |
| | Non-operating vibration | 4-g peak acceleration |
| | Drop (out of box) | 26 in (66 cm) on carpet, six-drop sequence |
| Approvals | Drop (in box) | 30 in (76.2 cm) on concrete, 16-drop sequence |
| | UL, cUL, FCC, CE, TUV GS, VCCI, BSMI, RCM, KCC, USB-IF, WHQL, EN/IEC 60601-1 | |
| Ergonomic compliance | ANSI HFS 100, ISO 9241-4, and TUVGS | |

Technical Specifications – Input/Output Devices

| HP 655 wireless Keyboard | | |
|---------------------------------|---|--|
| Physical Characteristics | Keys | 104, 105, 107,109 layouts |
| | Dimensions (L x W x H) | 16.86 x 4.55 x 0.71 in (428.22 x 115.47 x 18.06 mm) |
| | Weight | 0.96 lb (435g) |
| Electrical | Operating voltage | 3 VDC, +/-5% |
| | Power consumption | 20 mA Max (All LED on) |
| | System interface | 2.4GHz Wireless |
| | ESD | Contact Discharge: 8 KV Air Discharge: 15 KV |
| | EMI - RFI | Conforms to FCC rules for a Class B computing device |
| Mechanical | Keycaps | Plunger, 2.0 mm key travel |
| | Key actuation | 60±10g nominal peak force with tactile feedback |
| | Key life | 10 million keystrokes (Life tester) |
| | Key structure type | Rubber dome & Membrane |
| | Key-leveling mechanisms | For all double-wide and greater-length keys |
| Environmental | Operating temperature | 50° to 122° F (10° to 50° C) |
| | Non-operating temperature | -22° to 140° F (-30° to 60° C) |
| | Operating humidity | 10% to 90% (non-condensing at ambient) |
| | Non-operating humidity | 20% to 80% (non-condensing at ambient) |
| | Operating shock | 40 g, six surfaces |
| | Non-operating shock | 80 g, six surfaces |
| | Operating vibration | 2-g peak acceleration |
| | Non-operating vibration | 4-g peak acceleration |
| | Drop (out of box) | 26 in (66 cm) on carpet, six-drop sequence |
| Approvals | Drop (in box) | 30 in (76.2 cm) on concrete, 16-drop sequence |
| | CB, CE, FCC, cULus, ICES, IC, I TRC, TRA, CASA, UA, EAC, CNC, ANATEL, NOM-NYCE SCT, IFETEL, MPTC, RCM, BIS, PosTel, VCCI, TELEC, KC, MCMC, IDA, BSMI, NCC, DWLF&M, TP-BY, MOC | |
| Ergonomic compliance | TUVGS | |

Technical Specifications – Input/Output Devices

| HP Wired Desktop 320K Keyboard | | | | |
|--------------------------------|---------------------------|--|----------------|--------------------------|
| Physical Characteristics | Keys | 104, 105, 107,109 layouts | | |
| | Dimensions(L x W x H) | 18.86*4.55*0.66 in (426.2 x 110.9 x 16.7 mm) | | |
| | Weight | 1.00 lb(452g) | | |
| Electrical | Operating voltage | 5 VDC, +/-5% | | |
| | Power consumption | 50 mA Max (All LED on) | | |
| | System interface | USB Port | | |
| | ESD | Contact Discharge: 8 KV Air Discharge: 15 KV (Class B) | | |
| | EMI - RFI | European Standard EN 55022: 2006+A1: 2007, Class B. FCC/CFR 47 : Part 15 Class B | | |
| Mechanical | Keycaps | 2.0mm +/-0.2mm at 120gf Key travel | | |
| Environmental | Operating temperature | 10° C to 90° C | | |
| | Non-operating temperature | -30° C to 95° C | | |
| | Operating humidity | N/A | | |
| | Non-operating humidity | 10% to 90% (non-condensing at ambient) | | |
| | Operating shock | N/A | | |
| | Non-operating shock | i. Half-Sine Shock – End-Use Handling, Non-Operational Sample size: 5pcs. Condition: Sample power off. Axis: X, Y, Z axis (all 6 faces) – sample normal mode of operation. Number of shocks: 1 shock/face. Pulse duration: < 3 ms Velocity change: 50lps (inch-per-second)- 65lps desired. | | |
| | | ii. Trapezoidal Shock- Transportation Environment, Non-Operational Sample size: 5pcs. Condition: Sample power off. Orientation: All six faces: Front, Rear, Left, Right, Bottom, and Top. Configuration: As intended for shipment Number of shocks: 1 shock/face. Minimum faired acceleration: 30G's. Test also at 40 and 50G's to find margin. Velocity change: 266lps (inch-per-second) for product mass (m) 20< m <40lb. | | |
| Operating vibration | Operating vibration | Frequency (Hz) | Slope (dB/oct) | PSD (g ² /Hz) |
| | | 5-350 | 0 | 0.0001 |
| | | 350-500 | -6 | - |
| | | 500 | - | 0.00005 |
| | | (~0.21G _{nms}) | | |
| | | Total Test time: 10 minutes | | |
| | Non-operating vibration | Frequency (Hz) | Slope (dB/oct) | PSD (g ² /Hz) |

Technical Specifications – Input/Output Devices

| | | | |
|----------------------|--|----|--------|
| | 5.100 | 0 | 0.015 |
| | 100-137 | -6 | - |
| | 137-350 | 0 | 0.008 |
| | 350-500 | -6 | - |
| | 500 | - | 0.0039 |
| Drop (out of box) | 76cm on carpet, six-drop sequence | | |
| Drop (in box) | 10 times drop including 6 faces, one corner and 3 edges on rigid surface. Drop Height: 91cm | | |
| Approvals | CB, CE, FCC, ICES, EAC, NOM-NYCE SCT, RCM, BIS, VCCI, KC, BSMI | | |
| Ergonomic compliance | TUVGS | | |

HP Wired Desktop 320M Mouse

| | | |
|---------------------------------|---------------------------|---|
| Physical Characteristics | Keys | Left/right key |
| | Dimensions(L x W x H) | 4.09 x2.50 x 1.40 in (103.8x 63.4 x 35.5 mm) |
| | Weight | 0.16 lb(72g) |
| Electrical | Operating voltage | 5 VDC, +/-0.25V |
| | Power consumption | 100 mA Max |
| | System interface | USB Port |
| | ESD | Contact Discharge: 8 KV Air Discharge: 15 KV (Class B) |
| | EMI - RFI | European Standard EN 55022: 2006+A1: 2007, Class B. FCC/CFR 47 : Part 15 Class B |
| Mechanical | Keycaps | 0.3mm key travel |
| | Key actuation | 75±20g |
| | Key life | 1million cycles |
| | Key structure type | Tact Switch |
| | Key-leveling mechanisms | N/A |
| Environmental | Operating temperature | 10° to 90° C |
| | Non-operating temperature | -30° C to 95° C |
| | Operating humidity | N/A |
| | Non-operating humidity | 10% to 90% (non-condensing at ambient) |
| | Operating shock | N/A |

Technical Specifications – Input/Output Devices

| | | i. Half-Sine Shock – End-Use Handling, Non-Operational Sample size: 5pcs. Condition: Sample power off. Axis: X, Y, Z axis (all 6 faces) – sample normal mode of operation. Number of shocks: 1 shock/face. Pulse duration: < 3 ms Velocity change: 50lps (inch-per-second)- 65lps desired. | | | | | | | | | | | | | | | | | | |
|-----------------------------|--|---|----------------|----------------|--------------------------|-------|---|--------|---------|----|---|---------|---|---------|--------------------------|----|---|-----------------------------|---|--------|
| | Non-operating shock | ii. Trapezoidal Shock- Transportation Environment, Non-Operational Sample size: 5pcs. Condition: Sample power off. Orientation: All six faces: Front, Rear, Left, Right, Bottom, and Top. Configuration: As intended for shipment Number of shocks: 1 shock/face. Minimum faired acceleration: 30G's. Test also at 40 and 50G's to find margin. Velocity change: 266lps (inch-per-second) for product mass (m) 20< m <40lb. | | | | | | | | | | | | | | | | | | |
| | Operating vibration | <table border="1"> <thead> <tr> <th>Frequency (Hz)</th> <th>Slope (dB/oct)</th> <th>PSD (g²/Hz)</th> </tr> </thead> <tbody> <tr> <td>5-350</td> <td>0</td> <td>0.0001</td> </tr> <tr> <td>350-500</td> <td>-6</td> <td>-</td> </tr> <tr> <td>500</td> <td>-</td> <td>0.00005</td> </tr> <tr> <td colspan="3" style="text-align: center;">(~0.21G_{nms})</td></tr> <tr> <td colspan="3" style="text-align: center;">Total Test time: 10 minutes</td></tr> </tbody> </table> | Frequency (Hz) | Slope (dB/oct) | PSD (g ² /Hz) | 5-350 | 0 | 0.0001 | 350-500 | -6 | - | 500 | - | 0.00005 | (~0.21G _{nms}) | | | Total Test time: 10 minutes | | |
| Frequency (Hz) | Slope (dB/oct) | PSD (g ² /Hz) | | | | | | | | | | | | | | | | | | |
| 5-350 | 0 | 0.0001 | | | | | | | | | | | | | | | | | | |
| 350-500 | -6 | - | | | | | | | | | | | | | | | | | | |
| 500 | - | 0.00005 | | | | | | | | | | | | | | | | | | |
| (~0.21G _{nms}) | | | | | | | | | | | | | | | | | | | | |
| Total Test time: 10 minutes | | | | | | | | | | | | | | | | | | | | |
| | Non-operating vibration | <table border="1"> <thead> <tr> <th>Frequency (Hz)</th> <th>Slope (dB/oct)</th> <th>PSD (g²/Hz)</th> </tr> </thead> <tbody> <tr> <td>5.100</td> <td>0</td> <td>0.015</td> </tr> <tr> <td>100-137</td> <td>-6</td> <td>-</td> </tr> <tr> <td>137-350</td> <td>0</td> <td>0.008</td> </tr> <tr> <td>350-500</td> <td>-6</td> <td>-</td> </tr> <tr> <td>500</td> <td>-</td> <td>0.0039</td> </tr> </tbody> </table> | Frequency (Hz) | Slope (dB/oct) | PSD (g ² /Hz) | 5.100 | 0 | 0.015 | 100-137 | -6 | - | 137-350 | 0 | 0.008 | 350-500 | -6 | - | 500 | - | 0.0039 |
| Frequency (Hz) | Slope (dB/oct) | PSD (g ² /Hz) | | | | | | | | | | | | | | | | | | |
| 5.100 | 0 | 0.015 | | | | | | | | | | | | | | | | | | |
| 100-137 | -6 | - | | | | | | | | | | | | | | | | | | |
| 137-350 | 0 | 0.008 | | | | | | | | | | | | | | | | | | |
| 350-500 | -6 | - | | | | | | | | | | | | | | | | | | |
| 500 | - | 0.0039 | | | | | | | | | | | | | | | | | | |
| | Drop (out of box) | 76cm on carpet, six-drop sequence | | | | | | | | | | | | | | | | | | |
| | Drop (in box) | N/A | | | | | | | | | | | | | | | | | | |
| Approvals | CB, CE, FCC, cULus, ICES, EAC, NOM-NYCE SCT, RCM, VCCI, KC, BSMI | | | | | | | | | | | | | | | | | | | |
| Ergonomic compliance | TUVGS | | | | | | | | | | | | | | | | | | | |

Technical Specifications – Input/Output Devices

| HP 655 wireless Mouse | | |
|-------------------------------|--|---|
| Dimensions (H x L x W) | 4.74 x 2.75 x 1.63 in (120.29 x 69.97 x41.39 mm) | |
| Weight | 0.194lb (88g) | |
| Environmental | Operating temperature | 50° to 122° F (10° to 50° C) |
| | Non-operating temperature | -22° to 140° F (-30° to 60° C) |
| | Operating humidity | 10% to 90% (non-condensing at ambient) |
| | Non-operating humidity | 20% to 80% (non-condensing at ambient) |
| | Operating shock | 40 g, six surfaces |
| | Non-operating shock | 80 g, six surfaces |
| | Operating vibration | 2-g peak acceleration |
| Electrical | Non-operating vibration | 4-g peak acceleration |
| | Operating voltage | 3 VDC, +/-5% |
| | Power consumption (typical) | 10 mA Max |
| | Resolution | 1,200 DPI (Default) |
| | Sensor | Pixart PAW3222DB-TJDS |
| Mechanical | Tracking speed | 10G(max), 1G=9.8m/s ² |
| | Tracking acceleration | 2.4GHz Wireless |
| Regulatory approvals | Color | Jack Black |
| Ergonomic compliance | Compliant | CB, CE, FCC, cULus, ICES, IC, TRC, TRA, ICASA, UA, EAC, CNC, ANATEL, NOM-NYCE SCT, IFETEL, MPTC, RCM, PosTel, VCCI, TELEC, KC, MCMC, IDA, BSMI, NCC, DWLF&M, TP-BY, MOC |
| | Compliant | TUVGS |

Technical Specifications – Input/Output Devices

| HP PS/2 Mouse | | |
|-------------------------------|---|---|
| Dimensions (H x L x W) | 4.53 x 2.48 x1.46 in (115.2x 63 x37 mm) | |
| Weight | 0.22lb (101.6g) | |
| Environmental | Operating temperature | 41° to 122° F (5° to 50° C) |
| | Non-operating temperature | (-4° to 140° F)(-20° to 60° C) |
| | Operating humidity | 10% to 85% (non-condensing at ambient) |
| | Non-operating humidity | 5% to 95% (non-condensing at ambient) |
| | Operating shock | 40 g, six surfaces |
| | Non-operating shock | 80 g, six surfaces |
| | Operating vibration | 2-g peak acceleration |
| Electrical | Non-operating vibration | 4-g peak acceleration |
| | Tracking speed | 30 inch/sec (max) |
| | Tracking acceleration | 8G(max), 1G=9.8m/s ² |
| Mechanical | System interface | PS/2 |
| | Switch actuation | 60±15g nominal peak force with tactile feedback |
| | Switch life | 3 million keystrokes (Life tester) |
| | Switch type | Contamination-resistant switch membrane |
| | Key-leveling mechanisms | For all double-wide and greater-length keys |
| | Cable length | 6 ft (1.8 m) |
| Regulatory approvals | Color | Jack Black |
| | Compliant | UL, FCC, CE Mark, TUV GS, VCCI, BSMI, RCM, KCC |

Technical Specifications – Input/Output Devices

| HP USB 125 (Antimicrobial)/128 Laser Mouse (China only) | | |
|---|--------------------------------|---|
| Dimensions (H x L x W) | 112 x 63 x 36.2 mm (L x W x H) | |
| Weight | 85 g | |
| Environmental | Operating temperature | 50° to 122° F (10° to 50° C) |
| | Non-operating temperature | -22° to 140° F (-30° to 60° C) |
| | Operating humidity | 10% to 90% (non-condensing at ambient) |
| | Non-operating humidity | 20% to 80% (non-condensing at ambient) |
| | Operating shock | 40 g, six surfaces |
| | Non-operating shock | 80 g, six surfaces |
| | Operating vibration | 2-g peak acceleration |
| Electrical | Non-operating vibration | 4-g peak acceleration |
| | Operating voltage | 5 VDC, +/-5% |
| | Power consumption (typical) | 100mA |
| | Resolution | 1,200 DPI |
| | Sensor | Optical/ Laser USB mouse sensor |
| | Tracking speed | 30 inch/sec (max) |
| Mechanical | Tracking acceleration | 8G(max), 1G=9.8m/s ² |
| | Connector | USB |
| | Cable length | 6 ft (1.8 m) |
| Regulatory approvals | Color | Jack Black |
| | Compliant | UL, FCC, CE Mark, TUV GS, VCCI, BSMI, RCM, KCC, EAC |

Technical Specifications – Audio/Multimedia

AUDIO/MULTIMEDIA

HP Pro Mini 400 G9 Desktop PC

| | |
|-----------------------------------|---|
| Type | Integrated |
| HD Stereo Codec | Realtek ALC3252 |
| Audio I/O Ports | Front: Headset connector supports a CTIA and OMTP headset and is retaskable as a Line-in, Line-out, Microphone-in or Headphone-out port |
| Internal Speaker Amplifier | 2W class D mono amplifier for the internal speaker only. External speakers must be powered |
| Multi-streaming Capable | Playback multi-streaming can be enabled in the audio control panel to allow independent audio streams to be sent to/from the front jacks or integrated speaker. |
| Sampling | Supports resolutions from 16 to 24-bit; 44.1 kHz to 192 kHz for DAC and ADC |
| Wavetable Syntheses | Yes - Uses OS soft wavetable |
| Analog Audio | Yes |
| # of Channels on Line-Out | Stereo (Left & Right channels) |
| Internal Speaker | Yes |

HP Pro SFF 400 G9 Desktop PC

| | |
|-----------------------------------|--|
| Type | Integrated |
| HD Stereo Codec | Realtek ALC3252 |
| Audio I/O Ports | Front: Headset connector supports a CTIA and OMTP headset and is retaskable as a Line-in, Line-out, Microphone-in or Headphone-out port Rear: Audio line-in/line-out jack connector*, 3.5mm and support stereo output and retasking |
| Internal Speaker Amplifier | 2W class D mono amplifier for the internal speaker only. External speakers must be powered |
| Multi-streaming Capable | Playback multi-streaming can be enabled in the audio control panel to allow independent audio streams to be sent to/from the front and rear jacks or integrated speaker. |
| Sampling | Supports resolutions from 16 to 24-bit; 44.1 kHz to 192 kHz for DAC and ADC |
| Wavetable Syntheses | Yes - Uses OS soft wavetable |
| Analog Audio | Yes |
| # of Channels on Line-Out | Stereo (Left & Right channels) |
| Internal Speaker | Yes |

***NOTE:** System default is line-out. Line-in / Line-out can be adjusted through the audio setting

Technical Specifications – Audio/Multimedia

HP Pro Tower 400/480 G9 PCI Desktop PC

| | |
|-----------------------------------|--|
| Type | Integrated |
| HD Stereo Codec | Realtek ALC3252 |
| Audio I/O Ports | Front: Headset connector supports a CTIA and OMTP headset and is retaskable as a Line-in, Line-out, Microphone-in or Headphone-out port Rear: Audio line-in/line-out jack connector*, 3.5mm and support stereo output and retasking |
| Internal Speaker Amplifier | 2W class D mono amplifier for the internal speaker only. External speakers must be powered |
| Multi-streaming Capable | Playback multi-streaming can be enabled in the audio control panel to allow independent audio streams to be sent to/from the front and rear jacks or integrated speaker. |
| Sampling | Supports resolutions from 16 to 24-bit; 44.1 kHz to 192 kHz for DAC and ADC |
| Wavetable Syntheses | Yes - Uses OS soft wavetable |
| Analog Audio | Yes |
| # of Channels on Line-Out | Stereo (Left & Right channels) |
| Internal Speaker | Yes |

***NOTE:** System default is line-out. Line-in / Line-out can be adjusted through the audio setting

HP ProOne 440 G9 24 All-in-One PC

| | |
|-----------------------------------|--|
| Type | Integrated |
| HD Stereo Codec | Realtek ALC3252 |
| Audio I/O Ports | Side 3.5mm headset connector supports an OMTP or CTIA style headset and is re-taskable as a Line-in, Line-out, Microphone-in or Headphone-out port |
| Internal Speaker Amplifier | 2W per channel class D stereo amplifier for the internal speakers only |
| Multi-streaming Capable | Playback multi-streaming allows independent audio streams to be sent to/from the side jack and integrated speakers. |
| Sampling | Supports resolutions from 16 to 24-bit; 44.1 kHz to 192 kHz for DAC and ADC |
| Wavetable Syntheses | Yes – Uses OS Soft Wavetable |
| Analog Audio | Yes |
| # of Channels on Line-Out | Stereo (Left & Right channels) |
| Internal Speaker | Yes - Stereo |

INTEGRATED WEBCAM AND MICROPHONE

Optional integrated 5 MP RGB webcam & microphone; maximum resolution of 2592 x 1944

Optional integrated 5 MP RGB webcam with IR sensor & microphone; maximum resolution of 2592 x 1944

Technical Specifications – Power

POWER

| | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> |
|--|---|--|--|---|
| External Power Supplies¹ | 90W EPS, active PFC, 88% average efficiency at 115V & 89% at 230Vac | N/A | N/A | 120W EPS, active PFC, 88% average efficiency at 115V & 89% at 230Vac 150W EPS, active PFC, 88% efficiency in 115Vac / 89% efficiency in 230Vac 180W EPS, active PFC, 88% average efficiency at 115V & 89% at 230Vac 230W EPS, active PFC, 89% average efficiency at 115V / 230Vac 280W EPS, active PFC, 89% average efficiency at 115V / 230Vac |
| 80 PLUS Gold | N/A | 180W active PFC / 80 PLUS Gold 87/90/87% efficient at 20/50/100% load (115V) 90/92/89% efficient at 20/50/100% load (230V) | 180W active PFC / 80 PLUS Gold 87/90/87% efficient at 20/50/100% load (115V) 90/92/89% efficient at 20/50/100% load (230V) | N/A |
| 80 PLUS Platinum | N/A | 240W active PFC / 80 PLUS Platinum 90/92/89% efficient at 20/50/100% load (115V) 91/93/90% efficient at 20/50/100% load (230V) | 260W active PFC / 80 PLUS Platinum 400W active PFC / 80 PLUS Platinum 90/92/89% efficient at 20/50/100% load (115V) 91/93/90% efficient at 20/50/100% load (230V) | N/A |
| Operating Voltage Range | 90Vac~264Vac | 90Vac~264Vac | 90Vac~264Vac | 90Vac~264Vac |
| Rated Voltage Range | 100Vac~240Vac | 100Vac~240Vac | 100Vac~240Vac | 100Vac~240Vac |
| Rated Line Frequency | 50HZ~60HZ | 50HZ~60HZ | 50HZ~60HZ | 50HZ~60HZ |
| Operating Line Frequency | 47HZ~63HZ | 47HZ~63HZ | 47HZ~63HZ | 47HZ~63HZ |
| Rated Input Current with Energy Efficient* Power Supply | 90W \leq 1.7A | 180W Gold \leq 2.3A 240W Platinum \leq 2.9A | 180W \leq 2.3A 260W \leq 3.1A 400W \leq 5.2A | 120W \leq 1.7A 150W \leq 2.5A 180W \leq 2.5A 230W \leq 3.5A |
| DC Output | +19.5V | +12V | +12V | +19.5V |

Technical Specifications – Power

| Current Leakage (NFPA 99: 2012) | Less than 500 microamps of leakage current at 264 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. Less than 100 microamps of leakage current at 264 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. | Less than 500 microamps of leakage current at 264 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. Less than 100 microamps of leakage current at 264 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. | Less than 500 microamps of leakage current at 264 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. Less than 100 microamps of leakage current at 264 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. | Less than 500 microamps of leakage current at 264 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. Less than 100 microamps of leakage current at 264 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. |
|---------------------------------|---|---|---|---|
| Power Supply Fan | N/A | 50mm variable speed | 70mm variable speed | N/A |
| Power cord length* | 6.0 ft. (1.83 m) |
| Dimensions | 90W: 126 x 50 x 30 mm | 200 x 85 x 53 mm | 165 x 95 x 73 mm | 120W: 138mm x 68.5mm x 25.4mm 150W: 148 x 75.5 x 25.4mm 180W: 165.5mm x 79mm x 25.4mm 230W: 180mm x 88mm x 25.4mm |

1. External power supplies, power cords, cables and peripherals are not low halogen. Service parts obtained after purchase may not be low halogen.

*NOTE: 2m for India

Technical Specifications – Power

The power supply shall comply with harmonic input current requirements as detailed in EN61000-3-2 and JEIDA MITI standards. The harmonic input current requirements must be met under the following operating conditions:

Load Requirements: 50% and 100%

Input Voltage: 230Vac/50Hz.

For active power factor correction the power factor at 50% &100% loads shall be greater than 0.9 over the entire nominal input voltage range (100-127VAC and 200-240VAC).

| Condition | Standard Efficiency | 82/85/82% | 85/88/85% | 87/90/87% | 90/92/89% | Input Voltage |
|--------------------|---------------------|-----------|-----------|-----------|-----------|---------------|
| 10% of Rated Load | - | 75% | 81% | 84% | 86% | 115Vac/60HZ |
| 20% of Rated Load | - | 82% | 85% | 87% | 90% | 115Vac/60HZ |
| 50% of Rated Load | - | 85% | 88% | 90% | 92% | 115Vac/60HZ |
| | PF>0.9 | PF>0.9 | PF>0.9 | PF>0.9 | PF>0.95 | |
| | PF>0.9 | PF>0.9 | PF>0.9 | PF>0.9 | PF>0.9 | 230Vac/50HZ |
| 100% of Rated Load | 70% | 82% | 85% | 87% | 89% | 115Vac/60HZ |
| | PF>0.9 | PF>0.9 | PF>0.9 | PF>0.9 | PF>0.9 | 230Vac/50HZ |

Technical Specifications – Weights and Dimensions

WEIGHTS & DIMENSIONS¹

| | <u>DM</u> | <u>SFF</u> |
|--|--|---|
| Chassis (WxDxH) | 6.97 x 6.89 x 1.35 in 177 x 175 x 34.2 mm | 10.63 x 12.12 x 3.74 in 270 x 308 x 95 mm |
| System Volume | 64 cu in 1.05 L | 481.85 cu in 7.9 L |
| System Weight¹ | 2.74 lb 1.25 kg | 9.59 lb 4.35 kg |
| Max Supported Weight (desktop orientation) | N/A | 9.55 lb 4.38 kg |
| Packaging Dimension (WxDxH) | 19.57 x 5.04 x 8.78 in (497 x 128 x 223 mm) MPP*: 19.61 x 9.25 x 5.20 in (498 x 235 x 132 mm) | 15.52 x 19.65 x 8.07 in (394 x 499 x 205 mm) MPP*: 15.52 x 19.65 x 8.07 in (394 x 499 x 205 mm) |
| Shipping Weight | 6.52 lb (2.97 kg) MPP*: 7.50 lb (3.40 kg) | 15.31 lb (6.95 kg) MPP*: 15.97 lb (7.25 kg) |
| Palletization Profile (Fabricated EPE) | 18-units per layer 5- or 6-layers max depending on details of air freight 90 or 108 units per pallet depending on details of air freight 45.354 x 39.13 x 57.80 in, 1152 x 994 x 1468 mm (including pallet) | 6-units per layer 11 layers max 66 per pallet 47.24 x 39.37 x 94.63 in, 1200 x 1000 x 2412 mm (including pallet) |
| Palletization Profile** (Molded Pulp) | 10-units per layer 10 to 19 layers max depending on details of freight 100 or 190 units per pallet depending on details of freight 46.26 x 39.21 x 103.74 in, 1175 x 996 x 2635 mm (including pallet) | 6-units per layer 11 layers max 66 per pallet 47.24 x 39.37 x 94.63 in, 1200 x 1000 x 2412 mm (including pallet) |

1. Packaging material used will vary by country

2. Configured with 1 HDD & 1 ODD; DM configured with 1 HDD only

***NOTE:** "Molded pulp paper" cushion.

****NOTE:** The palletization is for single pack

Technical Specifications – Weights and Dimensions

| | <u>TWR</u> |
|---|--|
| Chassis (W x D x H) | 6.1 x 12.13 x 13.27 in 155x 308 x 337 mm |
| System Volume | 981.9 cu in 16.1 L |
| System Weight¹ | 11.7 lb 5.31 kg |
| Max Supported Weight (desktop orientation) | 11.2 lb 5.08 kg |
| Packaging Dimension (W x D x H) | 15.75 x 19.65 x 11.30 in (400 x 499 x 287 mm) MPP: 15.75 x 19.65 x 11.30 in (400 x 499 x 287 mm) |
| Shipping Weight | 17.69 lb (8.03 kg) MPP: 18.5 lb (8.4 kg) |
| Palletization Profile (Fabricated EPE) | 6-units per layer 8 layer max 48 per pallet 47.24 x 39.37 x 95.12 in, 1200 x 1000 x 2416 mm (including pallet) |
| Palletization Profile (Molded Pulp) | 6-units per layer 8 layer max 48 per pallet 47.24 x 39.37 x 95.12 in, 1200 x 1000 x 2416 mm (including pallet) |

1. Packaging material used will vary by country

2. Configured with 1 HDD & 1 ODD; DM configured with 1 HDD only

Technical Specifications – Weights and Dimensions

ALL-IN-ONE DIMENSIONS¹

| | | Without Stand (VESA Cover Plate) | | Cantilever Stand (Fixed Height Tilt Stand) | | Adjustable Height Stand | |
|-------------------------------|--------------|-------------------------------------|-----------|---|-----------|-------------------------|------------------|
| | | cm/kg | inch/lb | cm/kg | inch/lb | cm/kg | inch/lb |
| Product | Width | 53.93 cm | 21.23 in | 53.93 cm | 21.23 in | 53.93 cm | 21.23 in |
| | Length/Depth | 8.96 cm | 3.53 in | 18.70 cm | 7.36 in | 22.5 cm | 8.85 in |
| | Height | 35.36 cm | 13.92 in | 40.28 cm | 15.85 in | 37.94 ~ 50.94 cm | 14.93 ~ 20.05 in |
| | Weight | 6.93 kg | 15.28 lb | 7.315 kg | 16.12 lb | 7.775kg | 17.57 lb |
| Package | Width | 66.0 cm | 25.98 in | 66.0 cm | 25.98 in | 66.0 cm | 25.98 in |
| | Length/Depth | 19.5 cm | 7.67 in | 19.5 cm | 7.67 in | 19.5 cm | 7.67 in |
| | Height | 46.2 cm | 18.19 in | 46.2 cm | 18.19 in | 46.2 cm | 18.19 in |
| | Weight | 10.87 kg | 23.96 lb | 11.59 kg | 25.55 lb | 12.12 kg | 26.72 lb |
| Palletization for Sea/Rail | Width | 120.0 cm | 47.24 in | 120.0 cm | 47.24 in | 120.0 cm | 47.24 in |
| | Length/Depth | 100.0 cm | 39.37 in | 100.0 cm | 39.37 in | 100.0 cm | 39.37 in |
| | Height | 198.8 cm | 78.27 in | 198.8 cm | 78.27 in | 198.8 cm | 78.27 in |
| | Weight | 319.36 kg | 704.06 lb | 324.52 kg | 715.44 kg | 354.36 kg | 718.22 lb |
| Qty / Layer | | 7 | | 7 | | 7 | |
| Layers | | 4 | | 4 | | 4 | |
| Qty / Pallet via Sea/Rail | | 28 | | 28 | | 28 | |
| Qty / Pallet via Air | | 21 | | 21 | | 21 | |

1. Packaging material used will vary by country.

2. Configured with 1 HDD & 1 ODD.

3. Package weight is based on EPE package.

4. Actual system weight will depend on the system configuration.

Miscellaneous Features

MISCELLANEOUS FEATURES

Management Features

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- Intel® Wired for Management support; industry wide initiative to make Intel® architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
- Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button

Serviceability Features

- Dual colored power LED on front of computer to indicate either normal or fault condition
- Diagnostic LED Explanation Table:
 - Power LED will blink red 2 to 5 times, then blink white 2 or more times, then repeat (with beep tones for each blink initially):
 - 2 red + 2 white User must provide file for BIOS recovery (USB storage typically)
 - 2 red + 3 white User must enter a key sequence to proceed with recovery by policy
 - 2 red + 4 white BIOS recovery is in progress
 - 3 red + 2 white Memory could not be initialized
 - 3 red + 3 white Graphics adaptor could not be found
 - 3 red + 4 white Power supply failure / not connected
 - 3 red + 5 white Processor not installed
 - 3 red + 6 white Current processor does not support an enabled feature
 - 4 red + 2 white Processor has exceeded its temperature threshold / system thermal shutdown
 - 4 red + 3 white System internal temperature has exceeded its threshold
 - 5 red + 2 white System controller firmware is not valid
 - 5 red + 3 white System controller detected BIOS is not executing
 - 5 red + 4 white BIOS could not complete initialization / mainboard failure
 - 5 red + 5 white System controller rebooted the system after a health or recovery timer triggered
- HP PC Hardware Diagnostics UEFI:
 - This utility enables hardware level testing outside the operating system on many components. The diagnostics can be invoked by pressing F2 at POST, and is available as a download from HP Support
- System/Emergency ROM
- Flash ROM
- CMOS Battery Holder for easy replacement
- Flash Recovery with Video Configuration Record Software
- 1 Aux Power LED on System PCA
- Processor ZIF Socket for easy Upgrade
- Over-Temp Warning on Screen (Requires IM Agents)
- DIMM Connectors for easy Upgrade
- Clear CMOS Button
- NIC LEDs (integrated) (Green & Amber)
- Dual Color Power and HD LED - To Indicate Normal Operations and Fault Conditions
- Color coordinated cables and connectors
- Tool-less Hood Removal
- Front power switch
- System memory can be upgraded without removing the system board or any internal components
- Tool-less Hard Drive, memory & optical drive Removal (For MT, SFF, and DM only)
- Green Pull Tabs, and Quick Release Latches for easy Identification

Miscellaneous Features

Additional Features

Product Orientation

Description

Microtower (MT) can be oriented in a tower (vertical) orientation.
Small Form Factor (SFF) can be oriented as either a desktop (horizontal) or a tower (vertical) with optional vertical stand.
Desktop Mini (DM) can be oriented as either a desktop (horizontal) or a tower (vertical) with optional vertical stand.

Boot Sectors Protection

MBR and GPT sectors of the hard drive are critical to booting the operating system. By saving the MBR or GPT data (depending on the how the OS was installed), the BIOS will be able to monitor for changes and allow the user to override them with the backup copy at boot-up.

Drive Protection System

Description

DPS Access through F10 Setup during Boot
A diagnostic hard drive self- test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user
Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced

The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures

Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted

Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count

By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure

IOEDC: I/O Error Detection Circuitry

SMART Technology (Self-Monitoring, Analysis and Reporting Technology)

SMART I - Drive Failure Prediction

SMART II - Off-Line Data Collection

SMART III - Off-Line Read Scanning with Defect Reallocation

SMART IV - End-to-End CRC for hard drives

Detects errors in Read/Write buffers on HDD cache RAM

After Market Options

AFTER MARKET OPTIONS

| Graphics Solutions | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> | Part Number |
|---|-------------|------------|------------|------------|--------------------|
| NVIDIA T400 4GB GDDR6 3mDP | | X | X | | 5Z7E0AA |
| AMD Radeon RX 6300 2GB GDDR6 DP+HDMI FH | | | X | | 7Y6P7AA |
| AMD Radeon RX 6300 2GB GDDR6 DP+HDMI LP | | X | | | 803S9AA |
| Intel Arc A380 6GB GDDR6 FH PCIe x16 3DP+HDMI | | | X | | 9Q6G0AA |
| HP DisplayPort™ To HDMI True 4k Adapter | X | X | X | X | 2JA63AA |
| HP HDMI Standard Cable Kit | X | X | X | X | T6F94AA |
| HP DisplayPort™ Cable Kit | X | X | X | X | VN567AA |
| HP DisplayPort™ To VGA Adapter | X | X | X | X | AS615AA |
| HP DisplayPort™ To DVI-D Adapter | X | X | X | X | FH973AA |

| Desktop Mini Accessories | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> | Part Number |
|--|-------------|------------|------------|------------|--------------------|
| HP Desktop Mini 2.5" SATA Drive Bay kit v2 | X | | | | 13L70AA |
| HP Desktop Mini LockBox V2 | X | | | | 3EJ57AA |
| HP Desktop Mini DVD-Writer ODD Expansion Module | X | | | | K9Q83AA |
| HP Desktop Mini v4+ VESA Sleeve | X | | | | 99T54AA |
| HP Desktop Mini v4+ VESA Sleeve with Power Supply Holder | X | | | | 99T55AA |
| HP B250 PC Mounting Bracket | X | | | | 8RA46AA |
| HP B200 PC Mounting Bracket | X | | | | 762T5AA |
| HP B300 PC Mounting Bracket | X | | | | 2DW53AA |
| HP B300 PC Mounting Bracket with Power Supply Holder | X | | | | 7DB37AA |
| HP Desktop Mini Vertical Chassis Stand | X | | | | G1K23AA |
| B550 PC Mounting Bracket | X | | | | 16U00AA |
| HP B560 PC Mounting Bracket | X | | | | 763U8AA |
| HP Quick Release Bracket 2 | X | | | | 6KD15AA |

| Data Storage Drives | <u>Mini</u> | <u>SFF</u> | <u>TWR</u> | <u>AiO</u> | Part Number |
|---|-------------|------------|------------|------------|--------------------|
| HP PCIe Gen 4 NVME TLC M.2 512GB SSD | X | X | X | X | 406L8AA |
| HP PCIe Gen 4 NVME TLC M.2 1TB SSD | X | X | X | X | 406L7AA |
| HP 1TB 7200rpm SATA 6Gb/s 3.5" Hard Drive | | X | X | | QK555AA |

After Market Options

| Input Devices | Mini | SFF | TWR | AiO | Part Number |
|--|-------------|------------|------------|------------|--------------------|
| HP Wired Desktop 320K Keyboard | X | X | X | X | 9SR37AA |
| HP USB Business Slim CCID SmartCard Keyboard | X | X | X | X | Z9H48AA |
| HP Wired Desktop 320MK Mouse and Keyboard | X | X | X | X | 9SR36AA |
| HP Wired Desktop 320M Mouse | X | X | X | X | 9VA80AA |
| HP 655 Wireless Keyboard and Mouse Combo | X | X | X | X | 4R009AA |
| HP 455 Programmable Wireless Keyboard | X | X | X | X | 4R177AA |
| HP 125 Wired Keyboard | X | X | X | X | 266C9AA |
| HP 125 Wired Mouse | X | X | X | X | 265A9AA |
| HP 128 Laser Wired Mouse | X | X | X | X | 265D9AA |
| HP 225 Wired Mouse and Keyboard Combo | X | X | X | X | 286J4AA |
| HP 225 Antimicrobial Wired Mouse and Keyboard Combo (China Only) | X | X | X | X | 286K3AA |

| System Memory | Mini | SFF | TWR | AiO | Part Number |
|--------------------------|-------------|------------|------------|------------|--------------------|
| HP 4GB DDR4-3200 UDIMM | | X | X | | 13L78AA |
| HP 8GB DDR4-3200 UDIMM | | X | X | | 13L76AA |
| HP 16GB DDR4-3200 UDIMM | | X | X | | 13L74AA |
| HP 32GB DDR4-3200 UDIMM | | X | X | | 13L72AA |
| HP 4GB DDR4-3200 SODIMM | X | | | X | 13L79AA |
| HP 8GB DDR4-3200 SODIMM | X | | | X | 13L77AA |
| HP 16GB DDR4-3200 SODIMM | X | | | X | 13L75AA |
| HP 32GB DDR4-3200 SODIMM | X | | | X | 13L73AA |
| HP 8GB DDR5-4800 UDIMM | | X | X | | 4M9X9AA |
| HP 16GB DDR5-4800 UDIMM | | X | X | | 4M9Y0AA |
| HP 32GB DDR5-4800 UDIMM | | X | X | | 4M9Y2AA |
| HP 8GB DDR5-4800 SODIMM | X | | | X | 4M9Y4AA |
| HP 16GB DDR5-4800 SODIMM | X | | | X | 4M9Y5AA |
| HP 32GB DDR5-4800 SODIMM | X | | | X | 4M9Y7AA |
| HP 8GB DDR5-5600 SODIMM | X | | | X | 79U70AA |
| HP 16GB DDR5-5600 SODIMM | X | | | X | 79U71AA |
| HP 32GB DDR5-5600 SODIMM | X | | | X | 79U72AA |

| Multimedia Devices | Mini | SFF | TWR | AiO | Part Number |
|----------------------------------|-------------|------------|------------|------------|--------------------|
| HP S101 Speaker Bar | | X | X | | 5UU40AA |
| HP Z G3 Conferencing Speaker Bar | X | X | X | | 32C42AA |
| HP Stereo 3.5mm Headset G2 | X | X | X | | 428K7AA |
| HP Stereo USB Headset G2 | | X | X | | 428K6AA |

After Market Options

| Communication Devices | Mini | SFF | TWR | AiO | Part Number |
|------------------------------------|------|-----|-----|-----|-------------|
| Intel® Ethernet I225-T1 GbE NIC | | X | X | | 406L9AA |
| Intel® Ethernet I226-T1 2.5GbE NIC | | X | X | | 9P1U8AA |

| Security Devices | Mini | SFF | TWR | AiO | Part Number |
|-------------------------------------|------|-----|-----|-----|-------------|
| HP Business PC Security Lock v3 Kit | | X | X | | 3XJ17AA |
| HP Keyed Cable Lock 10mm | X | X | X | X | T1A62AA |

| Stands and Mounting Accessories | Mini | SFF | TWR | AiO | Part Number |
|--|------|-----|-----|-----|-------------|
| HP B250 PC Mounting Bracket | X | | | | 8RA46AA |
| HP B300 PC Mounting Bracket | X | | | | 2DW53AA |
| HP B550 PC Mounting Bracket | X | | | | 16U00AA |
| HP Quick Release Bracket 2 | X | | | X | 6KD15AA |
| HP ProOne G9 VESA Plate with Power Supply Holder | | | | X | 56P78AA |

| I/O Devices | Mini | SFF | TWR | AiO | Part Number |
|---|------|-----|-----|-----|-------------|
| HP DisplayPort Port Flex IO v2 | X | X | X | | 13L54AA |
| 800 G9 SATA Power Cable Non RF | | X | | | 8H5A4AA |
| 400 G9 SATA Power Cable Non RF | | | X | | 8H5A3AA |
| HP HDMI Port Flex IO v2 | X | X | X | | 13L55AA |
| HP Type-C USB 3.1 Gen2 Port Flex IO v2 | | X | X | | 13L59AA |
| HP Type-C USB 3.1 Gen2 Port with 100W PD Flex IO v2 | X | | | | 13L60AA |
| HP USB 3.2 Gen1 x2 Module Flex IO v2 to I/O Devices | | X | X | | 13L58AA |
| HP VGA Port Flex IO v2 | X | X | X | | 13L53AA |
| HP PCIe x1 Parallel Port Card | | X | X | | N1M40AA |
| HP 800/600/400 G3 Serial/ PS/2 Adapter | | X | X | | 1VD82AA |
| HP USB to Serial Port Adapter | X | X | X | X | J7B60AA |
| HP Serial Port Flex IO v3 | X | X | X | | 5B895AA |
| HP USB-C To DisplayPort Adapter | X | | | X | N9K78AA |
| HP Single Mini Display Port Adapter to Display Port Adapter | | X | X | | 2MY05AA |

NOTE: For more detail on HP I/O Devices please refer to the [HP FLEX IO Option Cards QuickSpecs](http://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c06042607). URL is:
<http://h20195.www2.hp.com/v2/GetDocument.aspx?docname=c06042607>

© Copyright 2025 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, Celeron, Core, Pentium are registered trademarks or trademarks of Intel® Corporation in the U.S. and/or other countries. Bluetooth® is a trademark of its proprietor, used by HP, Inc. under license. USB Type-C™ and USB-C™ are trademarks of USB Implementers Forum. NVIDIA, GeForce and NVS are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. AMD and Radeon are trademarks of Advanced Micro Devices, Inc. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

Change Log

| Date | Version History | Action | Description of Change |
|--------------------|-----------------|-------------|--|
| April 26, 2024 | From v1 to v2 | Update | T400 cards multi display support updated to 3 |
| April 29, 2024 | From v2 to v3 | Replacement | Intel® I225-LM 2.5 for Intel FoxPond1 I225-T1 2.5GbE |
| May 3, 2024 | From v3 to v4 | Removal | HP Desktop Mini Port Cover v3 from AMO section |
| May 8, 2024 | From v4 to v5 | Removal | DDR5-5600 64GB 250-DIMM card from Memory section |
| July 22, 2024 | From v5 to v6 | Correction | Integrated SATA storage connector corrected checked for AiO |
| August 7, 2024 | From v6 to v7 | Correction | Intel® 12th Generation Core™ Processors and Intel® Pentium® Processors specs corrected. |
| November 11, 2024 | From v7 to v8 | Addition | RAID note added to 3.5 inch SATA Hard Disk Drives in Storage section |
| November 25, 2024 | From v8 to v9 | Update | Padlock to Padlock loop in call out images for TWR 256GB/512GB/1TB M.2 2280 PCIe NVMe SSD tables updated |
| December 4, 2024 | From v9 to v10 | Update | Padlock to Padlock loop in call out images for SFF |
| December 5, 2024 | From v10 to v11 | Addition | UEFI Self Certification Level: 2.7B added to BIOS in SW section |
| December 17, 2024 | From v11 to v12 | Addition | Dust filter statement added to At a Glance section. |
| January 15, 2025 | From v12 to v13 | Addition | “Up to 4 displays” statement for all formfactors in At A Glance section |
| February 5, 2025 | From v13 to v14 | Addition | NVIDIA® A400 4GB GDDR6 card added to Graphics |
| February 18, 2025 | From v14 to v15 | Update | Internal storage drive corrected to Internal HDD cage in BAYS / 2.5 1TB* 7200RPM SATA HDD removed in STORAGE both for DM |
| February 25, 2025 | From v15 to v16 | Update | 256GB/512GB/1TB PCIE NVME SSD “Value” added on description as long as 4x4 into Interface, the 2nd NOTE : PCIe Gen4 based removed |
| March 10, 2025 | From v16 to v17 | Update | Back call out's images descriptions corrected for SFF/TWR:USB Type A & C |
| May 8, 2025 | From v17 to v18 | Correction | HP Serial Port Flex IO 2 nd removed from AMO section |
| May 19, 2025 | From v18 to v19 | Addition | Height Adjustment (Portrait Mode) added to stand specifications tables |
| May 20, 2025 | From v19 to v20 | Addition | Disclaimer added to VESA COVER with EPS Holder table in AiO Stand Specs |
| May 27, 2027 | From v20 to v21 | Update | “with external antenna” added to WiFi6E disclaimer in N&C section |
| August 20, 2025 | From v21 to v22 | Update | HP Wolf Security for Business disclaimer in SW section updated |
| September 3, 2025 | From v22 to v23 | Addition | 13L58AA added to AMO section |
| September 25, 2025 | From v23 to v24 | Addition | Intel® Core™ i5-14400 and 14400T added to Processors section |