

# POWERFORCE™

## Nylon Cable Ties

### Natural Nylon:

- Made from U.L. approved nylon 6/6. Flammability rating: UL 94V-2.

### Weather Resistant Nylon (Black UV):

- Carbonate "A" was added for greater resistance to ultra violet light in outdoor applications.

### Specification:

Made to comply with mil-spec drawing no. MS-3367.

Tensile strength meets or exceeds MIL-S-23190E standard.


### Approvals:

- UL approved
- CE Approved
- DVN approved
- VDE approved
- GL approved
- Lloyds Register approved
- SGS ISO14001 System Certification
- ISO 9001 BSMI Registered
- KKAS Environment management approved

Part No.	Description	Max. Bundle Dia.	Min. loop Tensile Strength (kgs)	UOM	Pack Qty
POWCT1002NT/100	Natural, 102mm x 2.5mm	22mm	8 kgs	Pack	100
POWCT1002NT/1000	Natural, 102mm x 2.5mm	22mm	8 kgs	Pack	1000
POWCT1503NT/100	Natural, 150mm x 3.6mm	36mm	18 kgs	Pack	100
POWCT1503NT/1000	Natural, 150mm x 3.6mm	36mm	18 kgs	Pack	1000
POWCT2002NT/100	Natural, 200mm x 2.8mm	55mm	8 kgs	Pack	100
POWCT2004NT/100	Natural, 200mm x 4.8mm	52mm	22 kgs	Pack	100
POWCT2004NT/1000	Natural, 200mm x 4.8mm	52mm	22 kgs	Pack	1000
POWCT2007NT/100	Natural, 200mm x 7.6mm	52mm	55 kgs	Pack	100
POWCT2504NT/100	Natural, 250mm x 4.8mm	68mm	22 kgs	Pack	100
POWCT2504NT/1000	Natural, 250mm x 4.8mm	68mm	22 kgs	Pack	1000
POWCT2807NT/100	Natural, 280mm x 7.6mm	74mm	55 kgs	Pack	100
POWCT3004NT/100	Natural, 300mm x 4.8mm	83mm	22 kgs	Pack	100
POWCT3004NT/1000	Natural, 300mm x 4.8mm	83mm	22 kgs	Pack	1000
POWCT3704NT/100	Natural, 370mm x 4.8mm	105mm	22 kgs	Pack	100
POWCT3807NT/100	Natural, 380mm x 7.6mm	105mm	55 kgs	Pack	100
POWCT5508NT/100	Natural, 550mm x 8mm	160mm	80 kgs	Pack	100

### WEATHER RESISTANT NYLON BLACK UV TIES

POWCT1002BK/100	Black UV, 102mm x 2.5mm	22mm	8 kgs	Pack	100
POWCT1002BK/1000	Black UV, 102mm x 2.5mm	22mm	8 kgs	Pack	1000
POWCT1503BK/100	Black UV, 150mm x 3.6mm	36mm	18 kgs	Pack	100
POWCT1503BK/1000	Black UV, 150mm x 3.6mm	36mm	18 kgs	Pack	1000
POWCT2002BK/100	Black UV, 200mm x 2.8mm	55mm	8 kgs	Pack	100
POWCT2004BK/100	Black UV, 200mm x 4.8mm	52mm	22 kgs	Pack	100
POWCT2004BK/1000	Black UV, 200mm x 4.8mm	52mm	22 kgs	Pack	1000
POWCT2007BK/100	Black UV, 200mm x 7.6mm	52mm	55 kgs	Pack	100
POWCT2504BK/100	Black UV, 250mm x 4.8mm	68mm	22 kgs	Pack	100
POWCT2504BK/1000	Black UV, 250mm x 4.8mm	68mm	22 kgs	Pack	1000
POWCT2807BK/100	Black UV, 280mm x 7.6mm	74mm	55 kgs	Pack	100
POWCT3004BK/100	Black UV, 300mm x 4.8mm	83mm	22 kgs	Pack	100
POWCT3004BK/1000	Black UV, 300mm x 4.8mm	83mm	22 kgs	Pack	1000
POWCT3704BK/100	Black UV, 370mm x 4.8mm	105mm	22 kgs	Pack	100
POWCT3807BK/100	Black UV, 380mm x 7.6mm	105mm	55 kgs	Pack	100
POWCT5508BK/100	Black UV, 550mm x 8mm	160mm	80 kgs	Pack	100
POWCT55012BK/100	Black UV, 550mm x 12mm	159mm	114 kgs	Pack	100
POWCT9144BK/100	Black UV, 914mm x 4.8mm	278mm	22 kgs	Pack	100
POWCT9409BK/100	Black UV, 940mm x 9mm	284mm	80 kgs	Pack	100

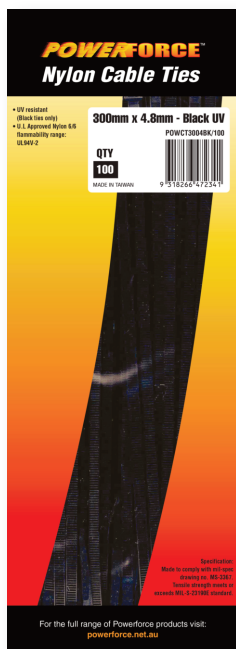

Black UV



Natural