





ARLSWP-48G

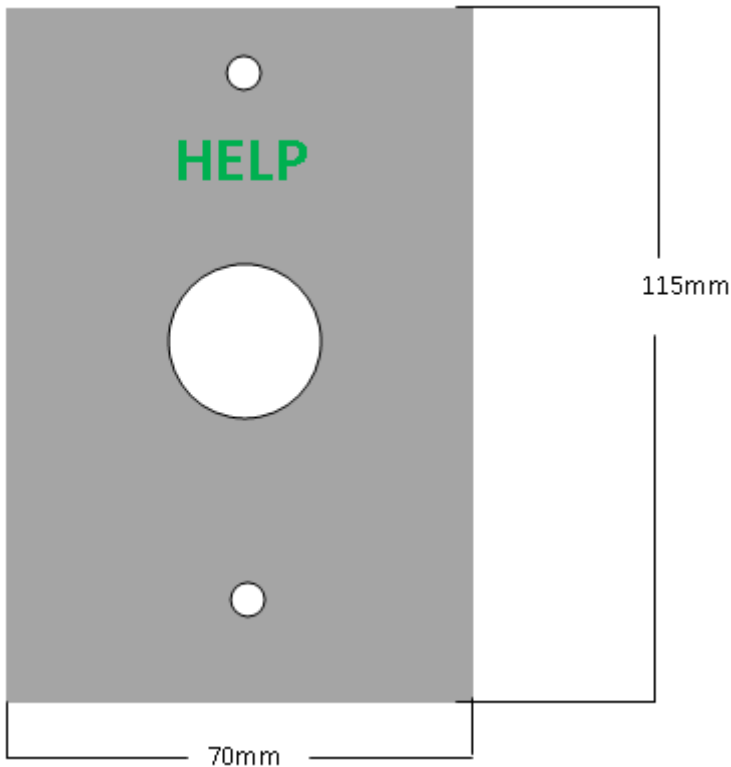

SPECIFICATIONS:

- 1.Switch Rating: AC500V/1.4A, DC220V/0.6A.
- 2.Mechanical Life: Momentary $\geq 200,000$ cycles
- 3.Electrical Life: $\geq 50,000$ cycles.
- 4.Contact Resistance: $\leq 50\text{m}\Omega$.
- 5.Insulation Resistance: $\geq 100\text{M}\Omega$.
- 6.Dielectric Strength: 3,000VAC , RMS 50Hz.
- 7.Operating Temperature: $-25^{\circ}\text{C} \sim +55^{\circ}\text{C}$ (No Freezing).
- 8.Operation Type: Emergency-stop Switch.
- 9.IP Class: IP40,IP65(made to order).

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Button: ABS.
- 3.Body: PA.
- 4.Base: PC.