

SMART9452

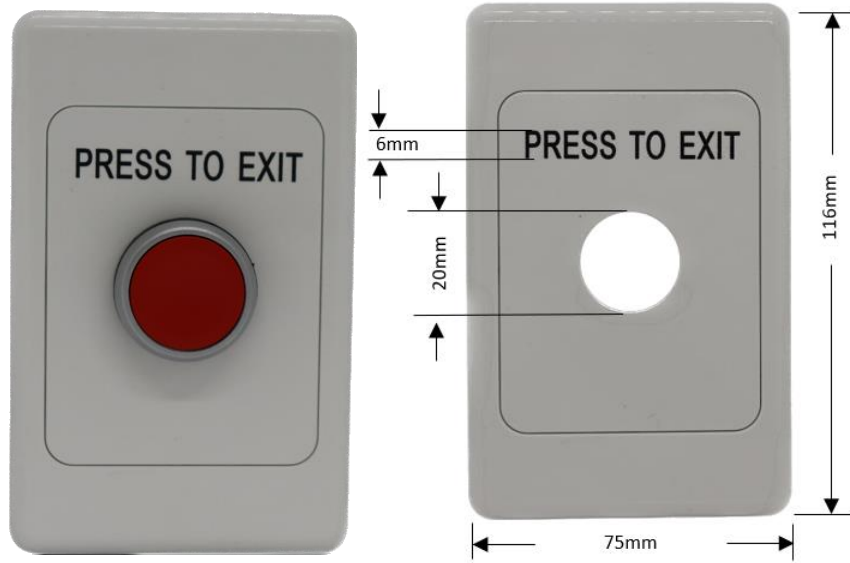


Plate Specifications

Plate Material : PLASTIC
Plate Color : WHITE
Plate style : STANDARD GPO
Plate Text Printed : "PRESS TO EXIT"
Plate Text Color : BLACK
Plate Button Hole Cutout Size : 22mm
Plate Mounting Holes : 2/4
Plate Size : 116Hx75Wx14D (mm)

Series : L21AA
Material : Plastic
Component Type : Pushbutton
Component Style : Flush Type
Button Color : RED
Button Diameter: 29.9 mm
Mounting Cutout Hole Size : 22 mm
Material – Operator : Plastic
Material – Bezel : Plastic
Material – Body/Housing : Plastic
Material – Spring : Stainless Steel
Operator Action : Momentary
Coupling Pate Included : YES
Contact Block Included : YES

Switch Specifications

IP Rating : IP65
Illuminated : NO
Tightening Torque Nominal : 3 Nm
Relative Humidity : 50% ~ 95% RH
Operating Temperature : -25° ~ 70° C
Storage Temperature : -40° ~ 70° C
Vibration Acceleration MAX : 10 m/s²
Vibration Displacement (Peak to Peak MAX) : 1.6 mm
Vibration Frequency – Operational MAX : 100 Hz
Button Size : 29.9DIA x 32.5D (mm)

Certifications : UL, OC/CB, BV IEC
Standards Compliance : UL 508, CSA 22.2, IEC 60947-5-1, IEC 60947-5-5, IEC 60947-5-4, IEC 60068-2-6

