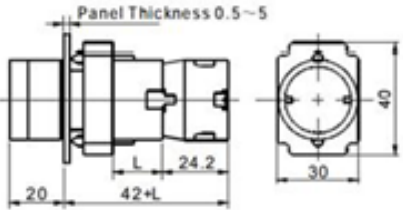


ARLSWP-76

Flat 2 Screw Hole Plate "DOOR UNLOCK" Engraved in Black with Illuminated Push Button MPS110FG-12V

	Momentary	 ⊙ Lamp Voltage ≤ 60V, L = 18; > 60V, L = 23.	R G Y O B W ⊙ Protective Degree: IP40/IP65, IP67 IP67 should be installed with seal cover.
--	------------------	---	--

Operating Temperature		- 25℃~+55℃(no freezing)
Operating Humidity		45 ~ 85%RH(no condensation)
Operating Altitude		Installation site can't be over 2000m above sea level.
Contact Material		- silver - silver alloy - gold-clad silver, cladding thickness is 3 μ m
Contact Resistance		≤50m
Insulation Resistance		≥100M
Dielectric Strength		3000V, Alternating Current 50Hz
Vibration Resistance		50Hz, Amplitude 1.0mm p-p
Shock Resistance		≥10g
Life	Mechanical	Momentary : ≥1,000,000 times; alternate, selector : ≥500,000 times; key-lock, emergency : ≥200,000 times
	Electrical	5万times ≥
Terminal		Screw terminal, connecting ability: Min : 1×0.5mm ² , Max : 2×1.5mm ² or 1×2.5mm ² (with or without connecting link)
Operation		Operation strength: 800gf~2200gf, according to the quantity of switch units Operation travel : About 5.5mm (For push button type)
Pollution Degree		3 degrees