


ARLSWP-75

Flat 2 Screw Hole Plate "ARMING BUTTON" Engraved in Black with Illuminated Push Button MPS110FG-12V

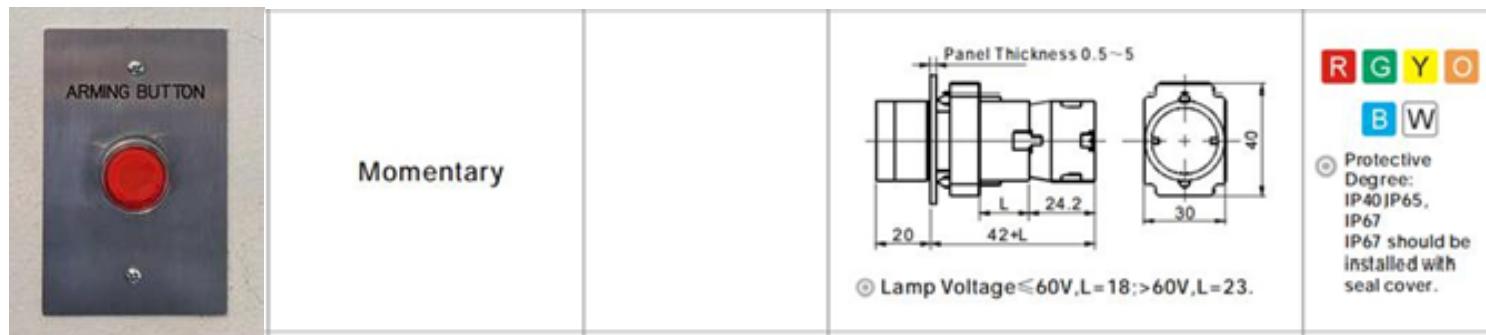

Operating Temperature	- 25°C~+55°C (no freezing)	
Operating Humidity	45 ~ 85%RH (no condensation)	
Operating Altitude	Installation site can't be over 2000m above sea level.	
Contact Material	- silver - silver alloy - gold-clad silver, cladding thickness is 3 μ m	
Contact Resistance	≤ 50m	
Insulation Resistance	≥ 100M	
Dielectric Strength	3000V, Alternating Current 50Hz	
Vibration Resistance	50Hz, Amplitude 1.0mm p-p	
Shock Resistance	≥ 10g	
Life	Mechanical	Momentary: ≥ 1,000,000 times; alternate, selector: ≥ 500,000 times; key-lock, emergency: ≥ 200,000 times
	Electrical	5万 times ≥
Terminal	Screw terminal, connecting ability: Min: 1 × 0.5mm ² , Max: 2 × 1.5mm ² or 1 × 2.5mm ² (with or without connecting link)	
Operation	Operation strength: 800gf ~ 2200gf, according to the quantity of switch units Operation travel: About 5.5mm (For push button type)	
Pollution Degree	3 degrees	