




ARLSWP-7

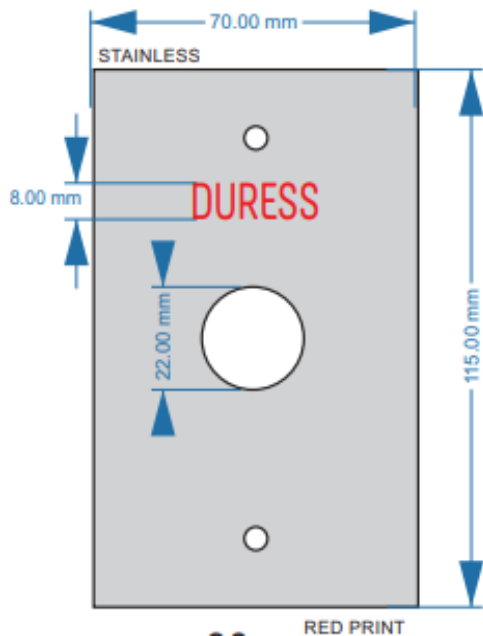

X means the color of the wire depends on the color of the LED

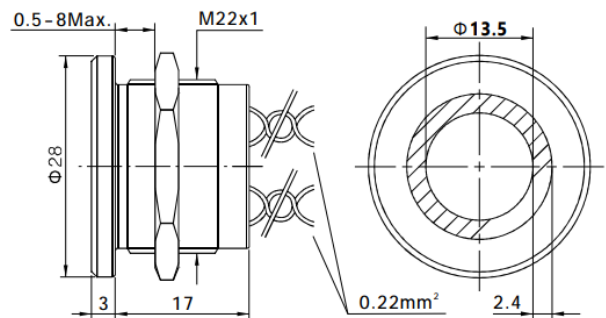

Environmental specification

- Sealing : IP68
- Vibration resistance : 10-500 Hz / 10 g
- Operating temperature : -40°C to +75°C

Electrical and general specification

- Max. current/voltage rating : 1A 24VAC/DC or 200mA 24VAC/DC depending on version
- Switch resistance ON : 10 Ω max.
- Switch resistance OFF : 5M Ω min.
- Operating force : 2 to 6N
- Life expectancy : 50 million cycles
- LED consumption : Illuminated dot : 10mA - Illuminated ring : 20mA

Material

- Case : aluminium anodized, stainless steel
- Multi-wire leads section 0,22 mm² length 300 mm, twisted by pair
- PC terminals : bronze, tin plated