

ARLSWP-86W

Touchless Surface Mount Exit Button 12V-24V

Surface mounted switch;
 Non-contact induction;
 NO/NC/COM;
 5-20cm Induction distance adjustable;
 0-30s delay control adjustment;
 LED indicator color can be customized;
 ABS material.

► Features:

- Wide Voltage DC 12~24V
- NO/NC/COM
- Non-contact infrared sensing
- Standby Blue LED, Response Green LED
- 5-20cm Induction distance adjustable
- 0-30s delay control adjustment




Model	ML-952 (White)			ML-952 (Black)		
View	Front	Side	Back	Front	Side	Back
Photos						

► Product Parameter

Model	ML-952-B/952-W	LED Indicator	Standby blue, Response green. (Customizable colors)
Size(mm)	86L*86W*20H	Material	ABS
Weight(KG)	0.084	Panel logo	Customizable
Power Supply	DC12-24V	Mechanical Life	500,000 Tested aging test qualified
Output Contact	NO/NC/COM	Operating Temp	-20°C~+55°C(-4-131F)
Sensitive Distance	5-20cm distance is adjustable	Operating humidity	0-95% (RH)
Time Delay	0-30s delay adjustment	Package Quantity	1 PCS/box, 100 PCS/case.
Waterproof grade	IP67		

► Dimensions

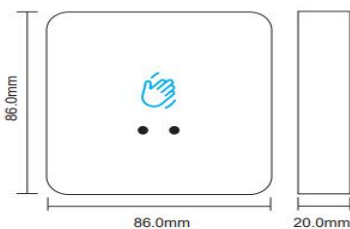

► Wiring diagram

