
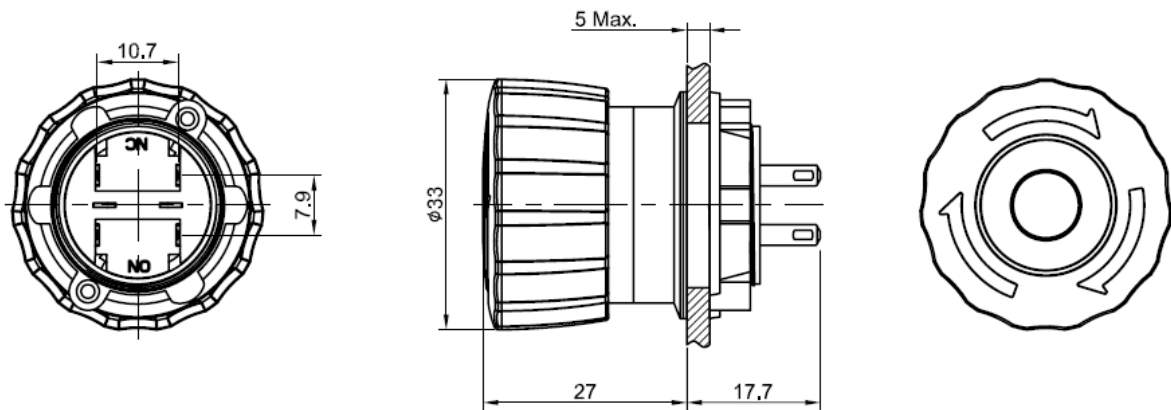



ARLSWP-49DURESS





Illuminated E-stop Twist to release with Customized Bezel UV Printed “DURESS” in black mounted on IP68 yellow enclosure

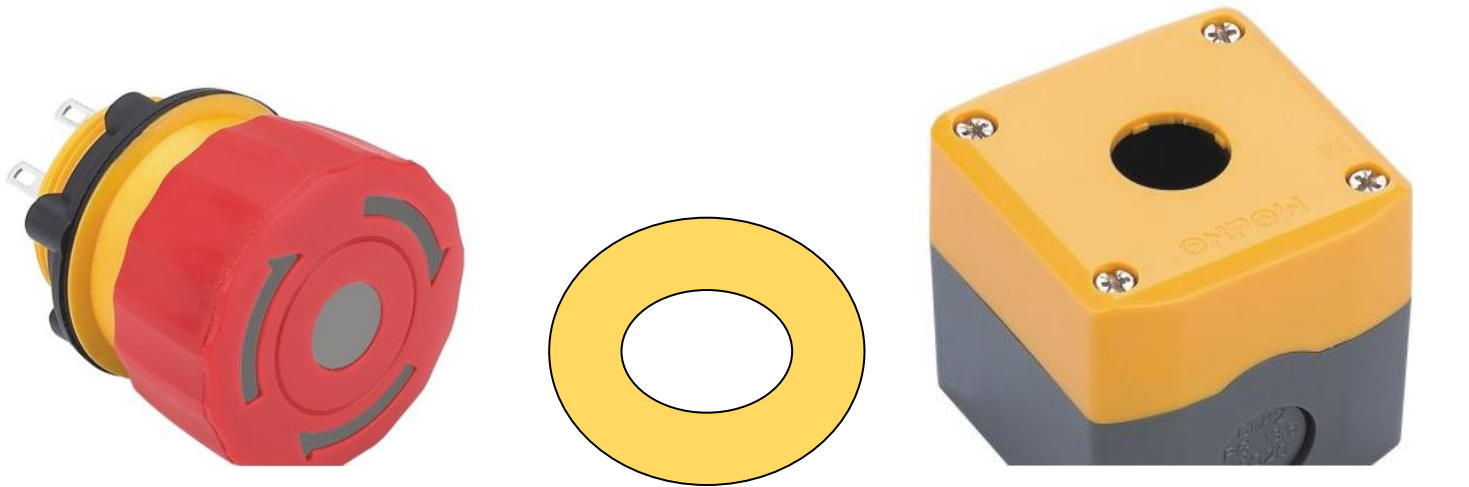

Type	NC	NO
Diagram		

Contact Composition

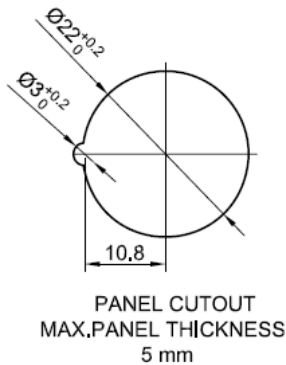

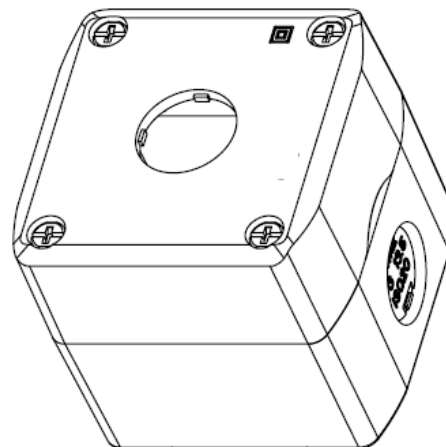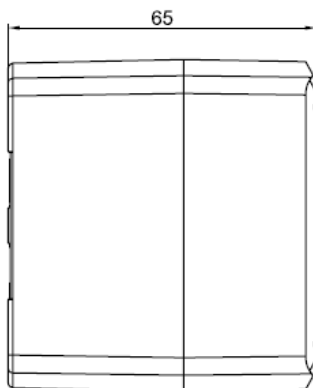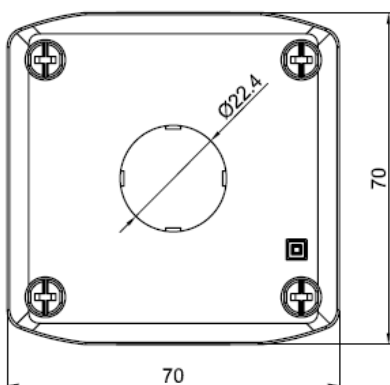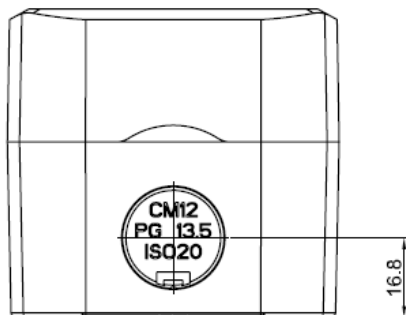

MATERIALS:

1.Body: ABS.

SPECIFICATIONS:

- 1.Switch Rating: AC220V/1.5A, DC220V/1.5A.
- 2.Mechanical Life: $\geq 200,000$ cycles.
- 3.Electrical Life: $\geq 50,000$ cycles.
- 4.Contact Resistance: $\leq 50\text{m}\Omega$.
- 5.Insulation Resistance: $\geq 1,000\text{M}\Omega$.
- 6.Dielectric Strength: 1500V, RMS 50Hz, 5seconds.
- 7.Operating Temperature: $-25^{\circ}\text{C} \sim +55^{\circ}\text{C}$ (No Freezing).
- 8.Contact Configuration: 1NO1NC.
- 9.IP Class: IP65.
- 10.Terminal Type: Pin Terminal(2.8 x 0.5mm).

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Button:PBT.
- 3.Body:PA.
- 4.Base: PA.