


meiker™

GQ2211R SERIES

Illuminated Stainless Steel Pushbutton Switch






- Illuminated stainless steel switch
- Vandal resistant
- LED ring illumination
- Waterproof IP65 rated
- Momentary or latching switch
- 1xN.O. + 1xN.C. contacts
- 22 mm panel mounting hole
- 2.8mm terminals

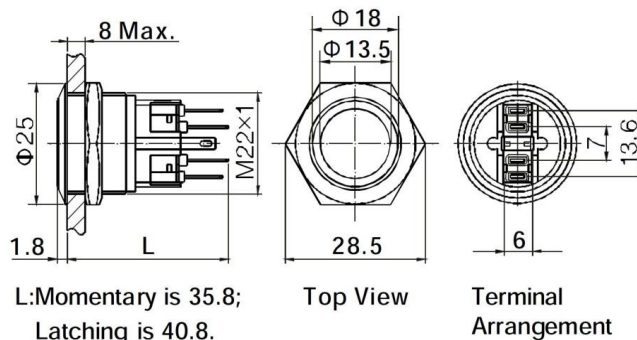

SPECIFICATION

Front Shape		Flat Round (Flush mount)
Termination		Solder/Push-on 2.8mm Terminal Tabs
Switching		1 x N/O + 1 x N/C
Max. Current Rating		5A / 250VAC
Contact Resistance		≤50mΩ
Insulation Resistance		≥1000MΩ
Dielectric Strength		2000VAC
Operating Temp.		-20°C ~ +55°C
Mechanical life		1,000,000 cycles
Electrical life		50,000 cycles
Contact material		Silver Alloy
Panel Thickness		1~8mm
Torque		5~14Nm
Operation Pressure		5.5N
IP Rating		IP65
Impact Rating		IK10
Material	Button	Stainless Steel
	Body	Stainless Steel
	Base	PA
RoHS Status		RoHS Compliant
Illumination	Type	Ring Illuminated (LED)
	Voltage	12V / 24V / 110V / 220V
	Colour	Red / Green / Yellow / Blue / White
	Life	40,000 hours

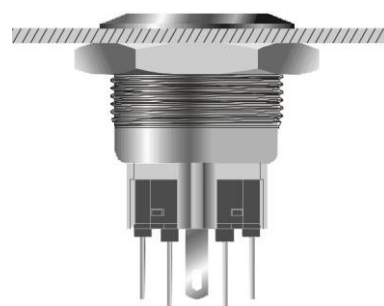

Customised options available: laser etching symbols and text, termination leads and looms, special LED voltage, dual-colour, etc

1

sales hotline: 1300 362 191

phone: +61 3 9465 0011

fax: +61 3 9465 5088

email: sales@arlin.com.au

web: www.arlin.com.au

GQ2211R SERIES cont.

HOW TO ORDER

GQ 1 2 3 - 4 - 5 - 6

GQ: anti-vandal switch series

1 = mounting size diameter, replace with

- 16
- 19
- 22
- 25

2 = contacts, replace with

- 11 1 N/O + 1 N/C
- 22 2 N/O + 2 N/C22

3 = illumination style, replace with

- (blank) non-illuminated
- R ring-illuminated LED

4 = switch action, replace with

- (blank) momentary
- ALT latching / alternate

5 = illumination colour, replace with

- BU blue LED
- GN green LED
- RD red LED
- WT white LED
- YL yellow LED

6 = illumination voltage, replace with

- 6V AC/DC6V
- 12V AC/DC12V
- 24V AC/DC24V
- 110V AC/DC110V
- 240V AC/DC240V

PART NUMBER	ACTION	LED COLOUR	LED VOLTAGE
GQ2211R-BU-12V	Momentary	Blue	AC/DC12V
GQ2211R-BU-24V			AC/DC24V
GQ2211R-BU-240V			AC/DC240V
GQ2211R-GN-12V		Green	AC/DC12V
GQ2211R-GN-24V			AC/DC24V
GQ2211R-GN-240V			AC/DC240V
GQ2211R-RD-12V		Red	AC/DC12V
GQ2211R-RD-24V			AC/DC24V
GQ2211R-RD-240V			AC/DC240V
GQ2211R-WT-12V	Latching	White	AC/DC12V
GQ2211R-WT-24V			AC/DC24V
GQ2211R-WT-240V			AC/DC240V
GQ2211R-YL-12V		Yellow	AC/DC12V
GQ2211R-YL-24V			AC/DC24V
GQ2211R-YL-240V			AC/DC240V
GQ2211R-ALT-BU-12V		Blue	AC/DC12V
GQ2211R-ALT-BU-24V			AC/DC24V
GQ2211R-ALT-BU-240V			AC/DC240V
GQ2211R-ALT-GN-12V		Green	AC/DC12V
GQ2211R-ALT-GN-24V			AC/DC24V
GQ2211R-ALT-GN-240V			AC/DC240V
GQ2211R-ALT-RD-12V		Red	AC/DC12V
GQ2211R-ALT-RD-24V			AC/DC24V
GQ2211R-ALT-RD-240V			AC/DC240V
GQ2211R-ALT-WT-12V		White	AC/DC12V
GQ2211R-ALT-WT-24V			AC/DC24V
GQ2211R-ALT-WT-240V			AC/DC240V
GQ2211R-ALT-YL-12V		Yellow	AC/DC12V
GQ2211R-ALT-YL-24V			AC/DC24V
GQ2211R-ALT-YL-240V			AC/DC240V

Notes:

1. Illumination LED contains internal resistor circuit, no external resistors required when using at rated voltage.
2. Illumination LED can be operated with AC or DC voltage, and either LED terminal can be anode or cathode.
3. LED terminals are independent of switch circuit, and can use the switch or peripheral circuit to control the LED status.