


RADUM 2P SECURITY COMPOSITE CABLE


DESCRIPTION:

Stock Code: BCCOMPRAD2P-200

Composite of 4 Core 14/0.20, 6 Core 14/0.20, 2 Pair Individual Shield 7/0.25, and Figure 8 24/0.20 Cables

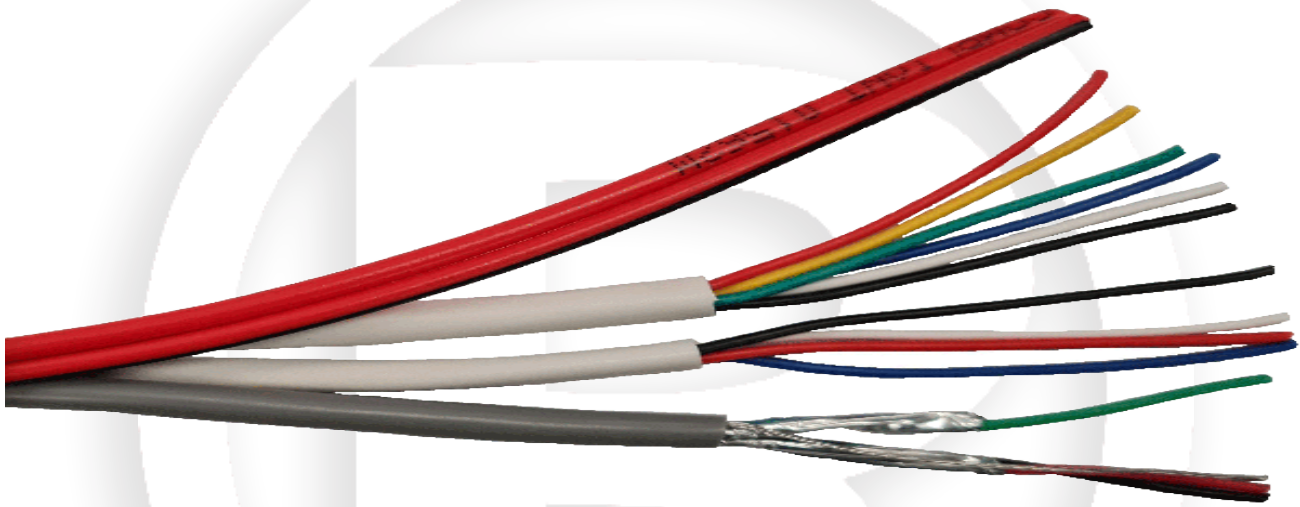

CONSTRUCTION

Overall Diameter	12.4 ~ 12.9mm
Overall Jacket	V75 PVC
Jacket Colour	Grey
Members	1 x 4 Core 14/0.20 White Cable 1 x 6 Core 14/0.20 White Cable 1 x 2 Pair 7/0.25 Grey Data Cable Figure 8 24/0.20 Red/Black Cable
Printing	Security Composite Cable N11251  RoHS Compliant (production date) XXXm A B C D E 1 2 3 4 5 6 7 8 9
Packaging	200m Wooden Drum in Carton

2 PAIR 7/0.25 INDIVIDUAL SCREENED DATA CABLE

Description	2 Pair 7/0.25 Individual Screened Data Cable
Conductor	Stranded 22 AWG 7 Strands x 0.25 Tinned Copper
Conductor Insulation	0.26mm 75°C Polypropylene
1st Pair Colours	Red & Black
2nd Pair Colours	White & Green
Pair Shielding	Individual Aluminium Polyester Laminate Tape
Jacket	Fire Retardant PVC Non Migrating
Jacket Colour	Grey
Use	This cable is for Low Voltage use only
Insulation Resistance	100 mega ohms between shields
Jacket O/D	4.27 mm
Printing	Black Printing on the Grey Sheath Printing to be repeated at approximately 0.05m intervals WWW.RADUM.COM.AU RADUM 2P INDI SCREENED DATA CABLE N11251

6 CORE 14/0.20 SECURITY CABLE

Description	6 Core Security / Automotive / Control Cable
Conductor	14 Strands x 0.20mm
Conductor Insulation	PVC
Conductor Colours	White, Blue, Red, Black, Green, Yellow
Jacket	PVC
Jacket Colour	White
Use	This cable is for Low Voltage use only
Jacket O/D	6.0 mm
Printing	Black Printing on the White Sheath Printing to be repeated at approximately 0.05m intervals WWW.RADUM.COM.AU RADUM 6 CORE 14/0.20mm SECURITY CABLE N11251

4 CORE 14/0.20 SECURITY CABLE

Description	4 Core Security / Automotive / Control Cable
Conductor	14 Strands x 0.20mm
Conductor Insulation	PVC
Conductor Colours	White, Blue, Red, Black
Jacket	PVC
Jacket Colour	White
Use	This cable is for Low Voltage use only
Jacket O/D	4.5 mm
Printing	<p>Black Printing on the White Sheath Printing to be repeated at approximately 0.05m intervals</p> <p>WWW.RADUM.COM.AU RADUM 4 CORE 14/0.20mm SECURITY CABLE N11251</p>

FIGURE 8 2 x 24/0.20 CABLE

Description	Parallel Webbed 24/0.20mm PVC Sheathed wires
Conductor	24 Strands x 0.20mm
Nominal Area	0.75 square mm
Amp Rating	7.5 Amps
Insulation Thickness	0.3mm (240 Volts)
Nominal O/D	2.40 x 5.40mm
Conductor Sheath	V75 PVC
Colours and Trace	Red / Black
Printing	<p>Black Printing on the Grey Sheath Printing to be repeated at approximately 0.05m intervals</p> <p>WWW.RADUM.COM.AU RADUM 24/0.20 F8 CABLE N11251</p>