

TK86HP

- 3J xenon beacon for fire, security and commercial applications
- High light output




Specifications:

Flash Rate:	90 fpm
Protection:	IP55
Cable Entry:	Through base with flying leads
Construction:	ABS Base, Acrylic Lens
Weight:	0.23Kg

Order Code	Voltage ¹	Current	Flash Energy
MXTK86HP012*	12VDC ±10%	800mA	3.15J
MXTK86HP024*	24VDC ±10%	400mA	3.15J
MXTK86HP240*	240VAC ±10%	80mA	2.2J

*Specify colour A = Amber, B = Blue, C = Clear, G = Green, R = Red

¹ Note DC units must be supplied from power supply with less than 10% ripple

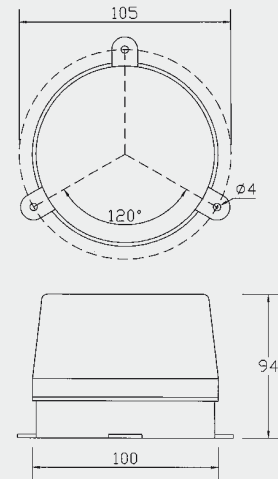

Dimensions in mm

Accessories and Spare Parts

Order Code	Description
MX90025*	TK86HP lens (*Specify colour)

NLXS

- Low power xenon beacon for fire, security and commercial applications
- Low current draw



Specifications:


Flash Rate:	100 fpm
Protection:	IP55
Cable Entry:	Through base with flying leads
Construction:	PC Base, Acrylic Lens

Order Code	Voltage ¹	Current	Weight (kg)
MXNLXS012*	12VDC ± 10%	220mA	0.075
MXNLXS024*	24VDC ± 10%	100mA	
MXNLXS024A*	24VAC ± 10%	250mA	
MXNLXS240*	240VAC ± 5%	25mA	

*Specify colour A = Amber, B = Blue, C = Clear, G = Green, R = Red

¹ Note DC units must be supplied from power supply with less than 10% ripple

Mounting is on a panel with rear access and max. thickness of 8mm

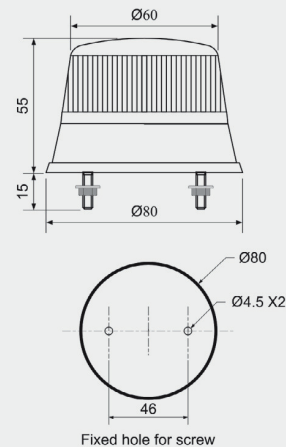

Dimensions in mm

