

## CAT6 UTP Slim Patch Cable


W26XX



### FEATURES

- All Datamaster® network patch cables are Fluke® tested and are manufactured to exceed Australian standards.
- ISO/IEC 11801 Category 6. TIA/EIA-568-C.2 Category 6 compliant
- Cat6 standard provides performance up to 250MHz and is suitable for fast ethernet and gigabit ethernet plus other network protocols that are backward compatible with Cat5/5e and Cat3 standards
- Slim 3.6mm diameter, 40% smaller than standard patch cable
- Flexible; able to bend at a tight radius
- Ultra slim circumference allows for greater air circulation in crowded server rooms
- Perfect cable when space is limited
- Made from 100% oxygen-free copper
- LSZH jacket
- Unshielded twisted pair (UTP)
- 4 twisted pairs (8 multi-strand connectors) T568A colour code
- RJ45-RJ45 connectors; high quality injection moulded for outstanding strain relief
- 50µm gold Category 6 compliant 2-row (staggered pin) plug
- Snagless boots
- Supplied in Datamaster® hang-cell bags
- 5-year limited warranty
- Custom-made cables are our specialty from custom lengths and colours to customer branded printing, contact us to discuss your needs.

### DESIGN & CONSTRUCTION

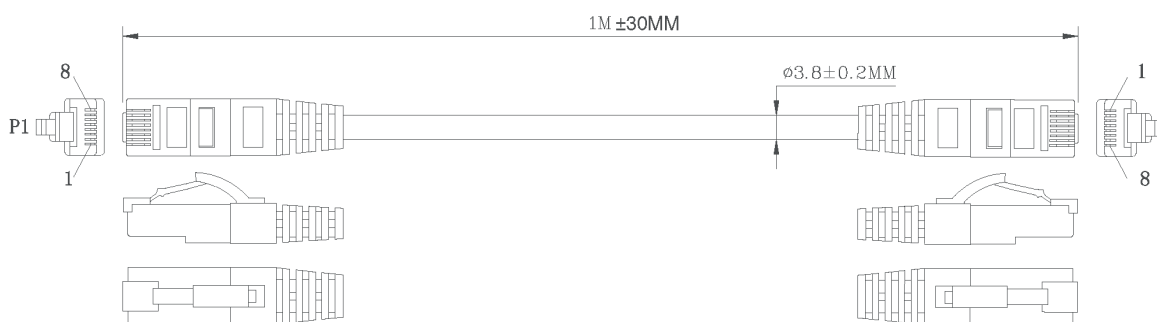

To view Access' extensive ranges go to: [www.accesscomms.com.au](http://www.accesscomms.com.au)

Sydney (Head Office)  
Brisbane Office  
Melbourne Office  
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147  
28 The Gateway, Broadmeadows VIC 3047  
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888  
Phone: (07) 3308 5555  
Phone: (03) 9330 8333  
Phone: (08) 8338 5540

[sales@accesscomms.com.au](mailto:sales@accesscomms.com.au)  
[brisbane@accesscomms.com.au](mailto:brisbane@accesscomms.com.au)  
[melbourne@accesscomms.com.au](mailto:melbourne@accesscomms.com.au)  
[adelaide@accesscomms.com.au](mailto:adelaide@accesscomms.com.au)

## CAT6 UTP Slim Patch Cable

W26XX

1	<b>Cable</b>	UTP CAT6 CABLE 4P * 28AWG
2	<b>Connection</b>	P1 & P2 : 8P8C PLUG, LONG BODY, GOLD PLATED
3	<b>Jacket material</b>	LSZH, BLUE COLOUR
4	<b>Packing</b>	Flat patch cable packed in one polybag
5	<b>Cable Printing</b>	DATAMASTER  E4073 VERIFIED CAT6 PATCH CORD ANSI/TIA 568 A/B/568C.2 #28AWG 4PR

### CHARACTERISTICS

COLOUR	LENGTHS	SKUS
BLUE	0.25m, 0.5m, 1.0m, 1.5m, 2.0m, 3.0, 5.0m, 10.0m	W2640SLIBLU, W2650SLIBLU, W2648SLIBLU, W2651SLIBLU, W2652SLIBLU, W2653SLIBLU, W2655SLIBLU, W2660SLIBLU
YELLOW	0.25m, 0.5m, 1.0m, 1.5m, 2.0m, 3.0, 5.0m	W2640SLIYEL, W2650SLIYEL, W2648SLIYEL, W2651SLIYEL, W2652SLIYEL, W2653SLIYEL, W2655SLIYEL
GREEN	0.25m, 0.5m, 1.0m, 1.5m, 2.0m, 3.0, 5.0m	W2640SLIGRN, W2650SLIGRN, W2648SLIGRN, W2651SLIGRN, W2652SLIGRN, W2653SLIGRN, W2655SLIGRN
PINK	0.25m, 0.5m, 1.0m, 1.5m, 2.0m, 3.0, 5.0m	W2640SLIPNK W2650SLIPNK, W2648SLIPNK, W2651SLIPNK, W2652SLIPNK, W2653SLIPNK, W2655SLIPNK
RED	0.25m, 0.5m, 1.0m, 1.5m, 2.0m, 3.0, 5.0m	W2640SLIRED W2650SLIRED, W2648SLIRED, W2651SLIRED, W2652SLIRED, W2653SLIRED, W2655SLIRED
WHITE	0.25m, 0.5m, 1.0m, 1.5m, 2.0m, 3.0, 5.0m	W2640SLIWHI W2650SLIWHI, W2648SLIWHI, W2651SLIWHI, W2652SLIWHI, W2653SLIWHI, W2655SLIWHI
BLACK	0.25m, 0.5m, 1.0m, 1.5m, 2.0m, 3.0, 5.0m	W2640SLIBLK W2650SLIBLK, W2648SLIBLK, W2651SLIBLK, W2652SLIBLK, W2653SLIBLK, W2655SLIBLK

### COMPLIANCE

- RoHS III EU/2015/863
- REACH SVHC x 219 (EC 1907/2006)
- ISO/IEC 11801 Category 6
- TIA/EIA-568-C.2
- AS/CA S008:2020



### COLOURS



To view Access' extensive ranges go to: [www.accesscomms.com.au](http://www.accesscomms.com.au)

Sydney (Head Office)  
Brisbane Office  
Melbourne Office  
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147  
28 The Gateway, Broadmeadows VIC 3047  
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888  
Phone: (07) 3308 5555  
Phone: (03) 9330 8333  
Phone: (08) 8338 5540

GREEN

RED

sales@accesscomms.com.au  
brisbane@accesscomms.com.au  
melbourne@accesscomms.com.au  
adelaide@accesscomms.com.au