


Tagit-M26-S1 Reader

Tagit-M26-S1 mullion reader, it reads tagit memory, site code and card number range, 26 bit Weigand format, Wallmount. L120 x W45 x H15 (mm) with three LED, the reading distance is about 5cm.

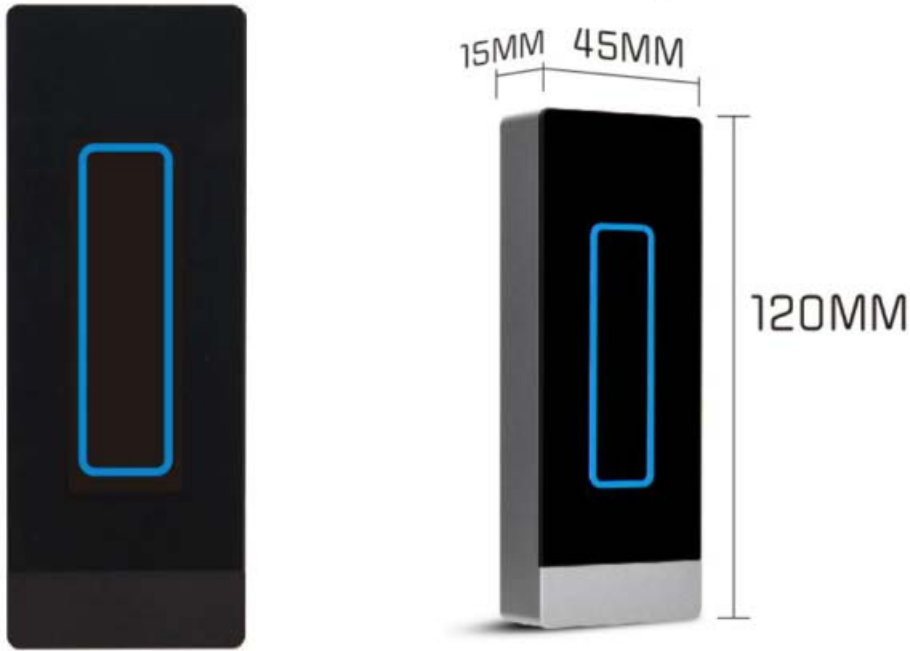

S1

Specifications

Power Supply	12V DC
Current	>200 mA
Frenquency	13,56 MHz
Protocol	ISO/IEC 15693
Response time	<100 ms
Output	Wiegand 26
Card Compatibility	TI 2048 and all ISO/IEC 15693 compatible cards.
Read Range	Up to 5cm
Cable Distance	>100m, 22AWG cable
Environmental	IP65
Operating Temperature	-20°C ~ 60°C
Dimensions	L120 x W45 x H15 (mm)
Weight	68g

Wiring Guide

Wire Colour	Signal Definition
RED	12V+ DC
BLACK	GND
GREEN	WIEGAND DATA 0
WHITE	WIEGAND DATA 1
Orange	*LED, low voltage enable
YELLOW	*BUZZER, low voltage enable
BROWN	*485+ TXD(232)
BLUE	*485- TXD(232)

* Optional connection