


MS-100E

10m (33ft) wide / 10m (33ft) curtain / 20m (66ft) long

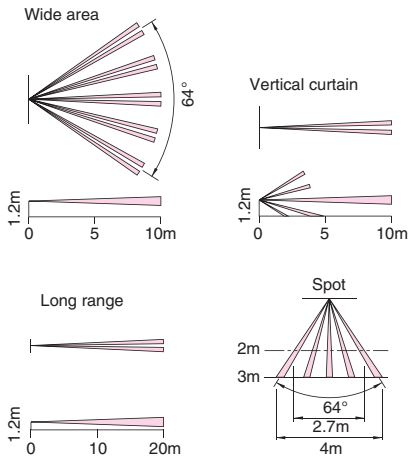

Detection System	Passive infrared (Twin)
Alarm Output	Dry contact relay output: N.C./N.O. selectable Reset time: approx 2sec. 30V (AC/DC) 0.5A Max
Supply Voltage	10.5 to 28V DC (non-polarity)
Current Consumption	30mA
Detection Area	Wide angle: 10m (33ft) Vertical curtain: 10m (33ft) Long range: 20m (66ft) Spot: 3m (10ft)
Ambient Temperature	-20°C to +50°C (-4°F to +122°F)
Mounting Position	Outdoor, Indoor
Optional	Pole cover, Pole attachment, Wall mount bracket, Wall / Ceiling attachment, Magnetic sheet.
External Dimensions - WHD	77 x 171 x 70mm (3.03 x 6.73 x 2.76")
IP Rating	43
Weight	220g (7.8oz)

FEATURES

- Supplied with Wide Angle and Long Range lenses
- Choose from 4 detection patterns
- Can be mounted horizontally or vertically
- Sensor head rotates a full 180 degrees
- Weather resistant for indoor or outdoor use

OUTDOOR PIR ACCESSORIES

	BCW-401 Wall/ceiling attachment For: • MS-100E + BW-14		BL-8400 Wall mount attachment For: • PIR-30WE/50NE • PA-8410E/8420E		BP-01 Pole attachment For: • PA-15WE/PA-30NE
	BP-02 Pole attachment For: • PIR-T15WE/AM • PA-15WE/PA-30NE		BP-03 Pole attachment For: • PIR-30WE/50NE • PA-8410E/8420E		BP-11 Pole cover For: • MS-100E
	BP-12 Pole attachment kit For: • MS-100E		BP-22 Pole attachment kit For: • MS-12TE/FE • TX-114SR		BP-32 Pole attachment clamps For: • OMS-12FE • TX-114TR/FR • PIR-T15WE/AM • PIR-T40NAM

	BR-M5 Magnetic sheet For: • MS-100E + BW-14		BV-03 Vice attachment For: • PA-15WE/PA-30NE		BW-14 Wall mount bracket For: • MS-100E
	BW-24 Wall mount bracket For: • MS-12TE/FE • TX-114SR		KP-32 Ceiling attachment For: • PIR-T15WE/AM + BP-22F		MS-LENS-WHITE White lens For: • MS-12TE/FE • TX-114FR/TR • TX-114SR
	WO-3D Wall bracket For: • PIR-30WE/50NE + BL-8400				