


SD-74C WH AR 2M RECESSED CONTACTS

.76"(19.3mm) Steel Door Recessed Type

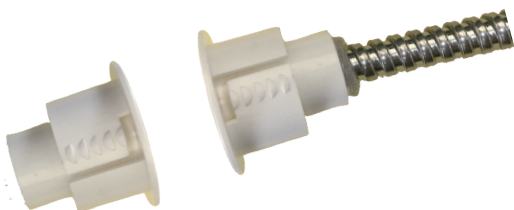

Contact Size: .76"×1.09"(19.3mm×27.65mm)

Standard Magnet Size: .37"×.75"(9.5mm×19mm)

Standard Gap: .75"(19mm)

Colors: White

78.7"(2000mm) Armored Leads




Specifications

Part Number	Gap Inch(mm)	Loop Open/Closed	Reed Form	Max. Contact Rating (W)	Max. Initial Contact Resistance (mΩ)	Max. Switching Voltage (V)	Max. Switching Current (A)
SD-74C WH AR 2M	.75"(19)	DPDT	DPDT	3	100	AC30/DC30	0.2


OPERATING TEMPERATURE:-40°C to +60°C

Outline Dimensions

Unit: inch(mm)

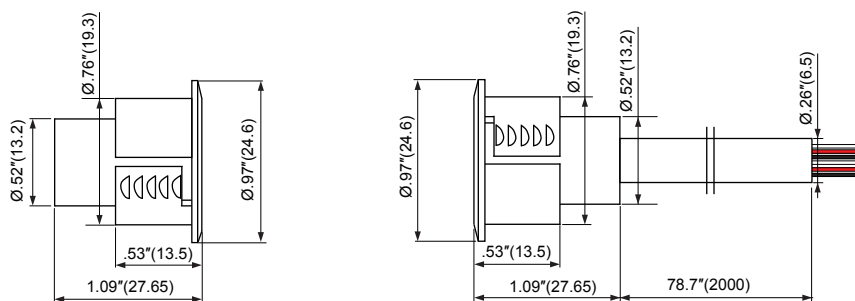

Wiring Diagram

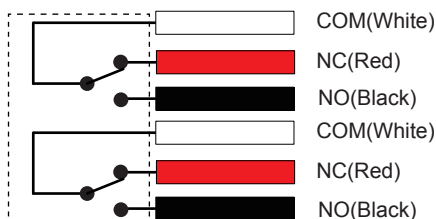

The Best Product Guarantee Since 1984®
TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040
Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125
www.tanealarm.com • E-MAIL: info@tanealarm.com