

SD-80

RECESSED CONTACTS

1"(25mm) Steel Door Recessed Type



Contact Size: 1"×.84"(25mm×21.3mm)

Standard Magnet Size: 1"×.84"(25mm×21.3mm)

Standard Gap: 1.1"(28mm)

Colors: White, Brown

12"(305mm) 22 AWG Leads Standard

Longer leads available.

Specifications


Part Number	Gap Inch(mm)	Loop Open/Closed	Reed Form	Max. Contact Rating (W)	Max. Initial Contact Resistance (mΩ)	Max. Switching Voltage (V)	Max. Switching Current (A)
SD-80	1.1"(28)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
SD-81B	1.1"(28)	OPEN	Normally Closed	3	100	AC30/DC30	0.2
SD-80 WG	1.26"(32)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
SD-82C	1.1"(28)	SPDT	SPDT	3	100	AC30/DC30	0.2
SD-84C	.75"(19)	DPDT	DPDT	3	100	AC30/DC30	0.2

OPERATING TEMPERATURE:-40°C to +60°C

Outline Dimensions

Unit: inch(mm)

SD-80/SD-81B

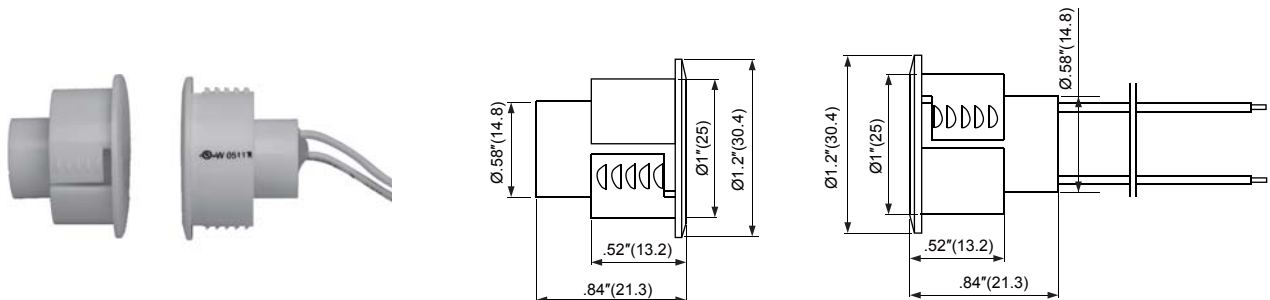

"We Contact The World"®

The Best Guarantee Since 1984 : \$50-1

TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040


Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com


Outline Dimensions

Unit: inch(mm)


SD-80 WG

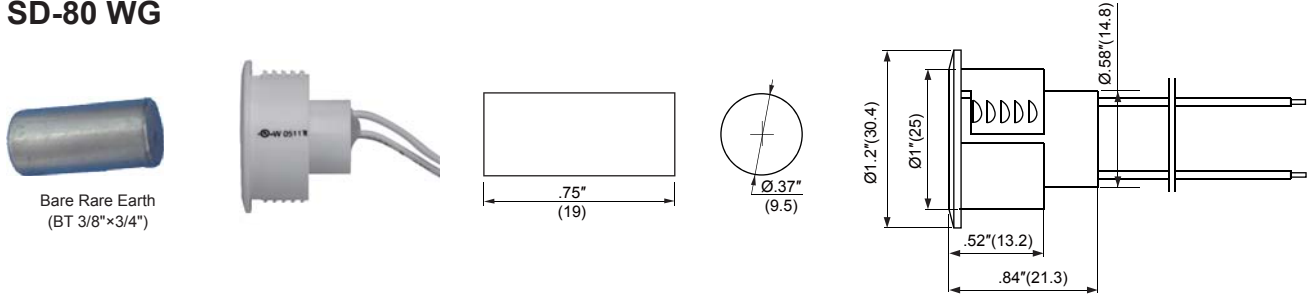

SD-82C

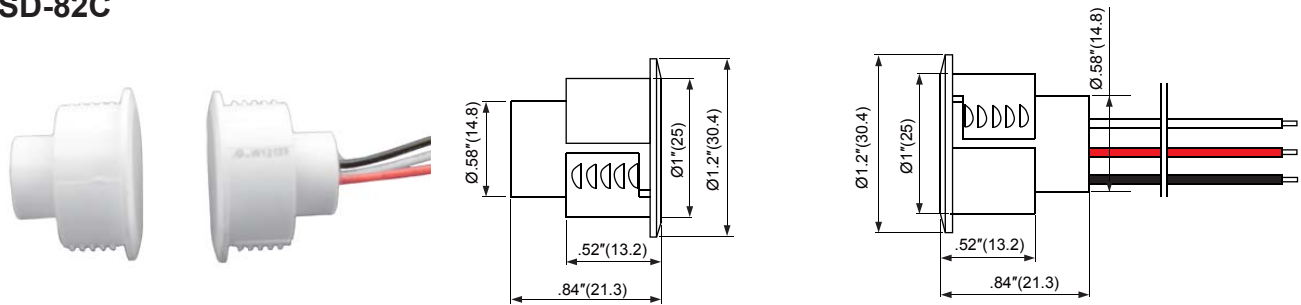


SD-84C

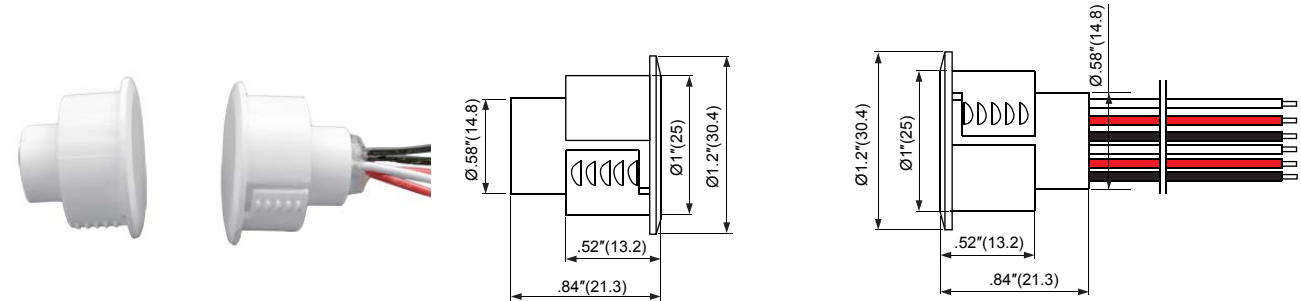


Wiring Diagram

SD-82C

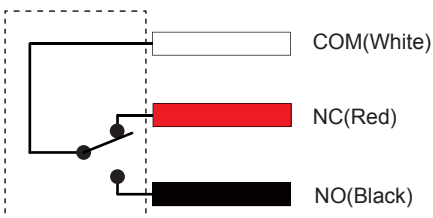

SD-84C

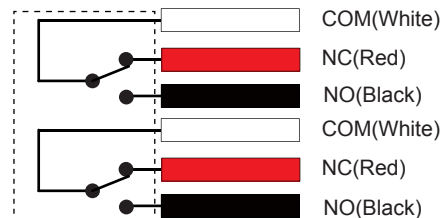

The Best Guarantee Since 1984 : \$50-1

TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com