

28" LED UHD Monitor

MW3228-F



Key Features


- 4K Ultra-HD resolution
- Slim narrow bezel design
- Using tamper-proof metal housing
- Long life cycle and stability, suitable for continuous 24/7 operation
- User-friendly operation menu, which is simple to operate
- Wide viewing angle, undistorted
- Wide array of connectivity options HDMI, DP, VGA, DVI

Specifications


Model	MW3228-F
Display	
Display Type	LED Backlight
Screen Size	28"
Pixel Pitch(mm)	0.16(W) x 0.16(H)
Max Resolution	3840×2160
Brightness	300 cd/m ²
Contrast	1000:1
Response Time	5ms
color	1.07B
Viewing Angle	Horizontal 170°, Vertical 160°
Interface	
VGA	1
HDMI	1
DP	1
DVI	1
Audio	
Audio Input	1
Speaker	2×3W
OSD	
Multi- Language	7(English, Spanish ,Korea, Simplified Chinese, France, Russia, Japanese)
Mounting	
VESA	100×100
General	
Power supply	AC 100~240V, 50~60Hz
Consumption	<40 W(on) <1W(Standby)
Operation Temperature	0°C ~ 40 °C
Operating Humidity	10%~85% (No Condensation)
Storage Temperature	-10°C ~50°C
Storage Humidity	10%~90% (No Condensation)
Dimension (mm)	660.9(W) × 388.3(H) × 49(D)
Weight:	Net Weight: 7.75 Kg Cross Weight: 9.4Kg
Accessory	
Standard	HDMI cable, Power cable ,Quick Guide
Optional	Hanging bracket, Pedestal

Appearance

Dimensions

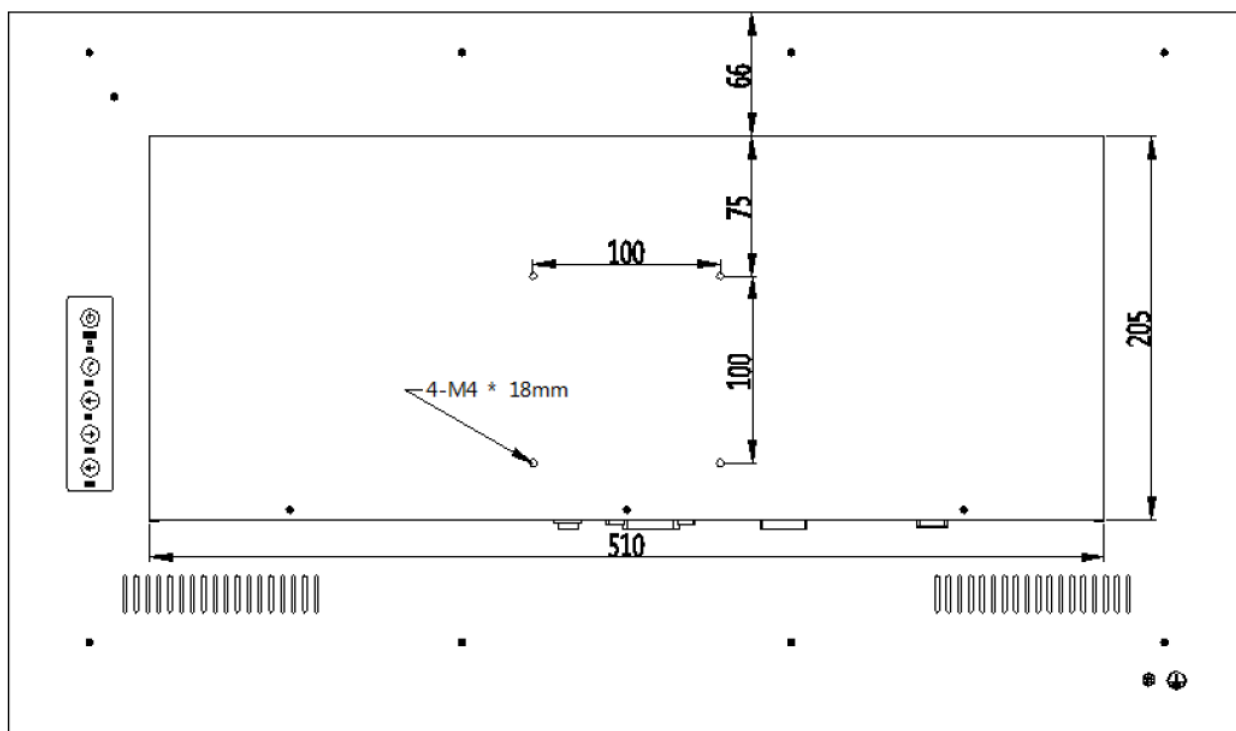

Interfaces

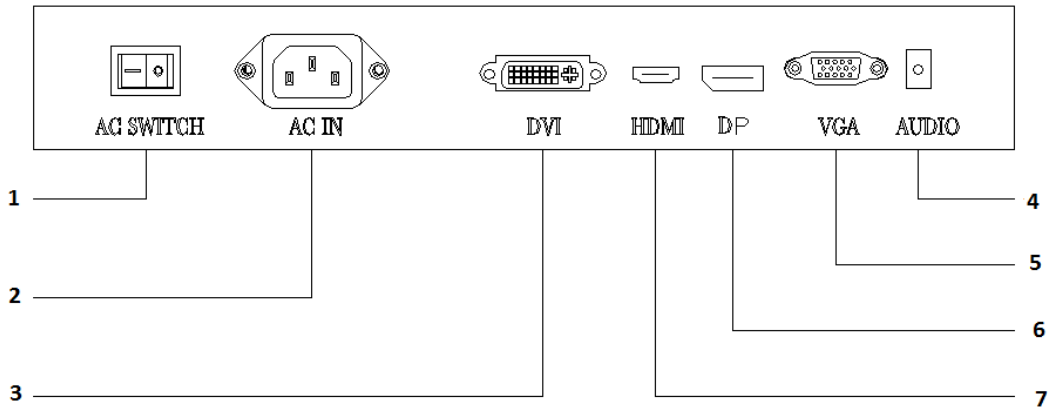

No.	Name
1	Switch
2	AC Power IN
3	DVI IN
4	AUDIO IN
5	VGA IN
6	DP IN
7	HDMI IN

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2017 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.