

NVR301-04X-P4



Key Features


- Support Ultra 265/H.265/H.264 video formats
- 4-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA simultaneous output
- Up to 4K resolution recording
- 1 SATA HDD up to 6 TB
- Support cloud upgrade

Specifications


| Model | NVR301-04X-P4 |
|---------------------------|--|
| Video/Audio Input | |
| IP Video Input | 4-ch |
| Two-way Audio Input | 1-ch, RCA |
| Network | |
| Incoming Bandwidth | 80Mbps |
| Outgoing Bandwidth | 64Mbps |
| Remote Users | 128 |
| Protocols | P2P, UPnP, NTP, DHCP, PPPoE |
| Video/Audio Output | |
| HDMI/VGA Output | HDMI: 3840x2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz |
| Recording Resolution | 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| Audio Output | 1-ch, RCA |

| | |
|---------------------------|--|
| Synchronous Playback | 4-ch |
| Corridor Mode Screen | 3/4 |
| Decoding | |
| Decoding format | Ultra 265/H.265/H.264 |
| Liveview/Playback | 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| Capability | 2 x 4k@30, 3 x 5MP@30, 4 x 4MP@30 |
| Hard Disk | |
| SATA | 1 SATA interface |
| Capacity | up to 6TB for each disk |
| Smart | |
| VCA Detection | Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking, Object Left Behind, Object Removed |
| VCA Search | Face search, Behavior search |
| Statistical Analysis | People counting |
| External Interface | |
| Network Interface | 1 RJ45 10M/100M self-adaptive Ethernet Interface |
| USB Interface | Rear panel: 1 x USB2.0, 1 x USB3.0 |
| PoE | |
| Interface | 4 independent 100 Mbps PoE network interfaces |
| Max Power | Max 30W for single port Max 54W in total (13.5W for each) |
| Supported Standard | IEEE 802.3at, IEEE 802.3af |
| General | |
| Power Supply | 48V DC Power Consumption: ≤9 W (without HDD) |
| Working Environment | -10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing) |
| Dimensions (W×D×H) | 260mm × 240mm × 47mm (10.2"×9.4"×1.9 ") |
| Weight (without HDD) | 1kg (2.20 lb) |

Dimensions

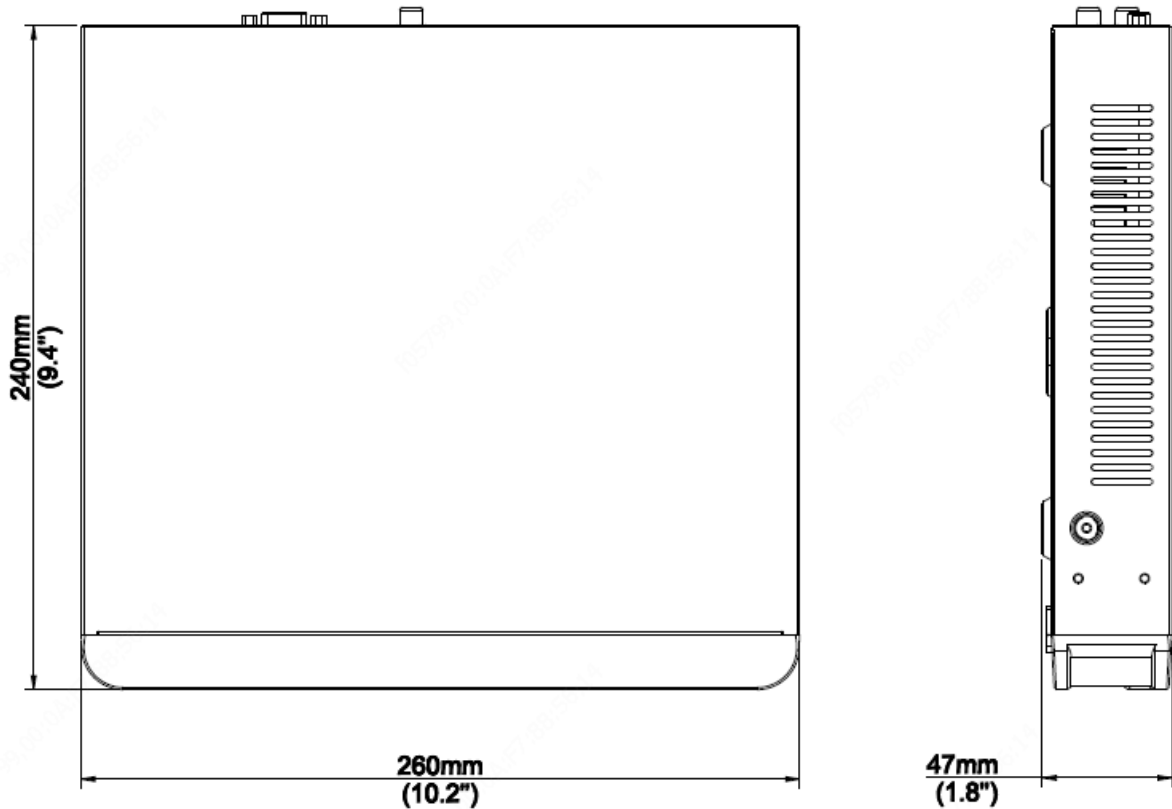

Rear Panel

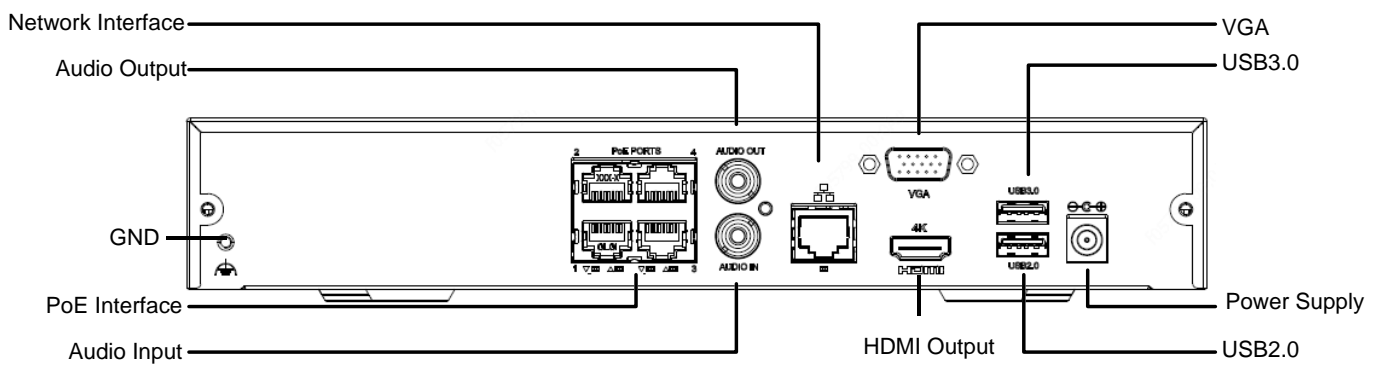

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2019 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.