


Network Video Recorder

NVR302-S-P Series

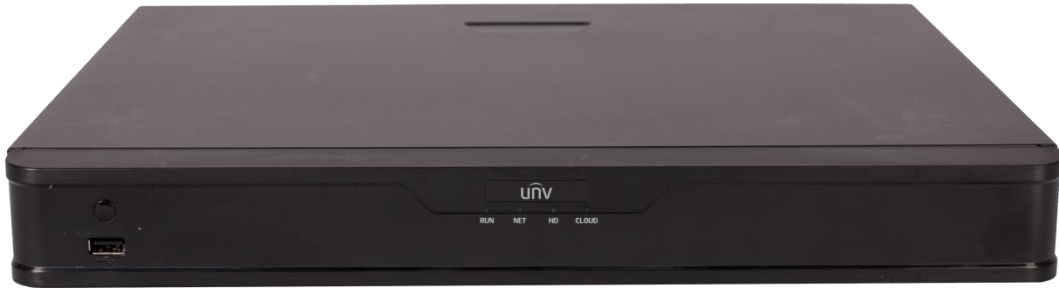

Key Features


- Support Ultra265/H.265/H.264 video formats
- 8/16-channel input
- Plug & Play with 8/16 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 2 SATA HDDs, up to 10TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

Specifications

| Model | NVR302-08S-P8 | NVR302-16S-P8 | NVR302-16S-P16 |
|---------------------------|---|---|---|
| Video/Audio Input | | | |
| IP Video Input | 8-ch | 16-ch | 16-ch |
| Two-way Audio Input | 1-ch, RCA | | |
| Network | | | |
| Incoming Bandwidth | 160Mbps | | |
| Outgoing Bandwidth | 96Mbps | 96Mbps | 96Mbps |
| Remote Users | 128 | | |
| Protocols | P2P, UPnP, NTP, DHCP, PPPoE | | |
| Video/Audio Output | | | |
| HDMI/VGA Output | VGA: 1024X768@60, 1280X720@60, 1280X1024@60, 1920X1080@50, 1920X1080@60 HDMI: 4k (3840x2160@30), 4k (3840x2160@60), 1024X768@60, 1280X720@60, 1280X1024@60, 1920X1080@50, 1920X1080@60 | | |
| Recording Resolution | 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | | |
| Audio Output | 1-ch, RCA | | |
| Synchronous Playback | 8-ch | 16-ch | 16-ch |
| Corridor Mode Screen | 3/4/5/7/9 | 3/4/5/7/9/10/12/16 | 3/4/5/7/9/10/12/16 |
| Decoding | | | |
| Decoding format | Ultra265/H.265/H.264 | | |
| Live view/Playback | 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | | |
| Capability | 1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30 | 1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30, 16 x D1 | 1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30, 16 x D1 |
| Hard Disk | | | |
| SATA | 2 SATA interfaces | | |
| Capacity | up to 10TB for each disk | | |
| External Interface | | | |
| Network Interface | 1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface | | |
| USB Interface | Front panel: 1 x USB2.0, Rear panel: 1 x USB2.0 | | |
| Alarm In | 4-ch | | |
| Alarm Out | 1-ch | | |
| PoE | | | |
| Interface | 8 independent 100Mbps PoE network interfaces | | 16 independent 100Mbps PoE network interfaces |
| Max Power | Max 30W for single port Max 130W in total (16.25W for each) | Max 30W for single port Max 130W in total (16.25W for each) | Max 30W for single port Max 240W in total (15W for each) |
| Supported Standard | IEEE 802.3af/at | | |
| General | | | |
| Power Supply | 220V AC Power Consumption: ≤9 W (without HDD) | | |
| Working Environment | -10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing) | | |


| | |
|----------------------|---|
| Dimensions (WxDxH) | 380mm x 315mm x 53mm (15.0" x 12.4" x 2.1") |
| Weight (without HDD) | ≤2.4kg (5.29lb) |

Dimensions

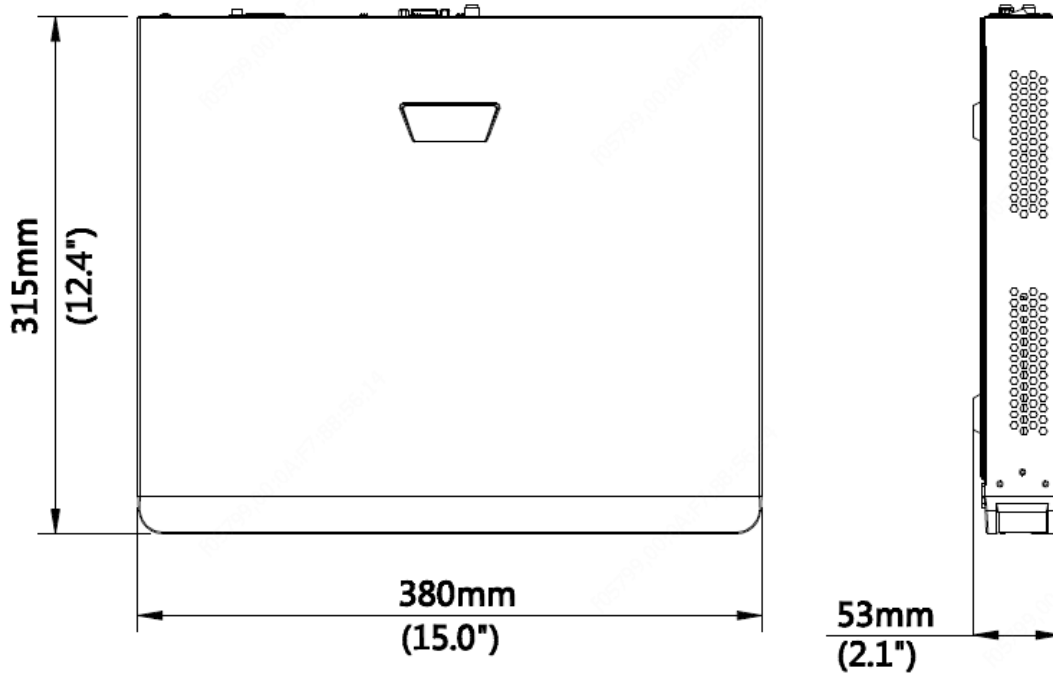

Rear Panel

Take **NVR302-16S-P8** for example

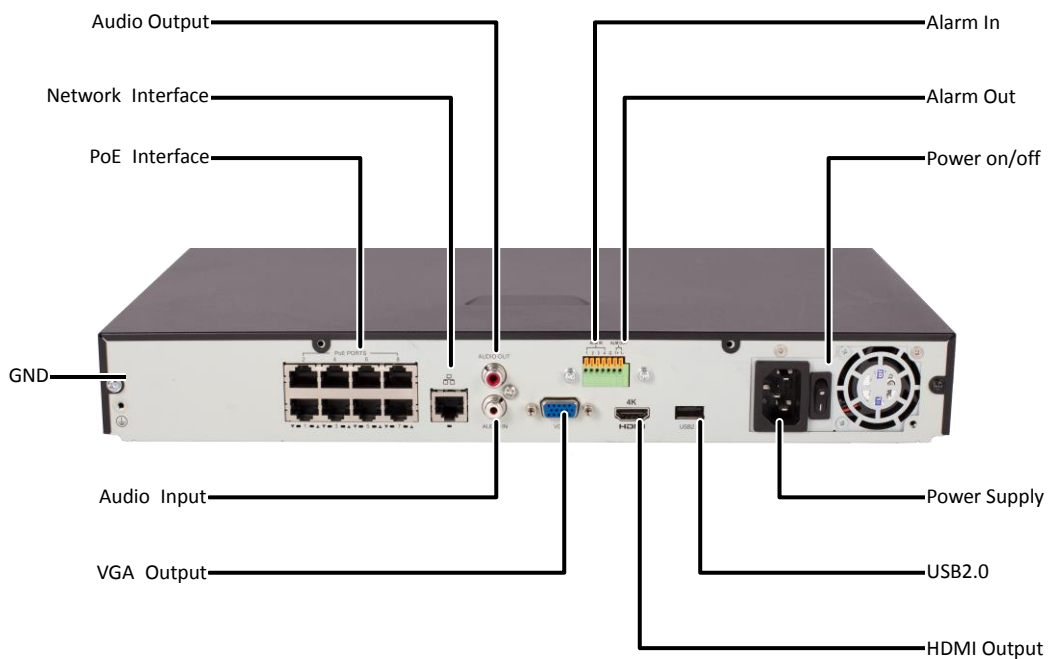

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://sgcdn.uniview.com>

©2019 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.