

XVR302-16Q2



Key Features

- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- Support audio over coaxial cable
- 16-channel BNC input
- Up to 4K resolution for recording
- Support 1-ch HDMI output at up to 4K, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coaxial cable


Specifications

Model	XVR302-16Q2
Video/Audio Input	
Analog Video Input	16-ch, BNC
IP Video Input	8-ch(only IP up to 24ch), each channel up to 4K
Supported Analog Camera Types	Support AHD input: 8MP@15fps 5MP@20fps 4MP@30fps 3MP@30fps(channel1-channel4) 1080P@30fps 720P@60fps Support TVI input: 8MP@15fps 5MP@20fps 4MP@30fps 3MP@20fps(channel1-channel4) 1080P@30fps 720P@60fps Support CVI input:


	8MP@15fps 4MP@30fps 1080P@30fps 720P@30fps Support CVBS input
Audio Input	1-ch, RCA
Video/Audio Output	
CVBS Output	1-ch, BNC
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
HDMI Output	4K(3840X2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Audio Output	1-ch, RCA
Two-way Audio	1-ch, RCA
Synchronous Playback	16-ch
Network	
Incoming Bandwidth	80Mbps (Up to 112Mbps after analog channel conversion)
Outgoing Bandwidth	160Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Encoding	
Recording Resolution	8MP Lite/5MP Lite/4MP Lite /3MP/1080P/720P/960H/D1/CIF
Recording Frame Rate	Main stream: 8MP Lite@8fps 5MP Lite@12fps 4MP Lite@15fps 3MP@15fps(channel1-channel4) 1080P@15fps 720P@30fps Sub stream: D1@12fps(Max)
Hard Disk	
SATA	2 SATA interfaces
Capacity	up to 6TB for each HDD
External Interface	
Network Interface	1 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB3.0, Front panel: 1xUSB2.0

Serial Interface	1 x RS485
Alarm In	4
Alarm Out	1
General	
Power Supply	12V DC Power Consumption: ≤ 12 W(without HDD)
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions(W×D×H)	380mm ×318mm× 53.50mm (14.96" × 12.51"×2.1")
Weight (without HDD)	≤2.0 Kg (4.4lb)

Dimensions

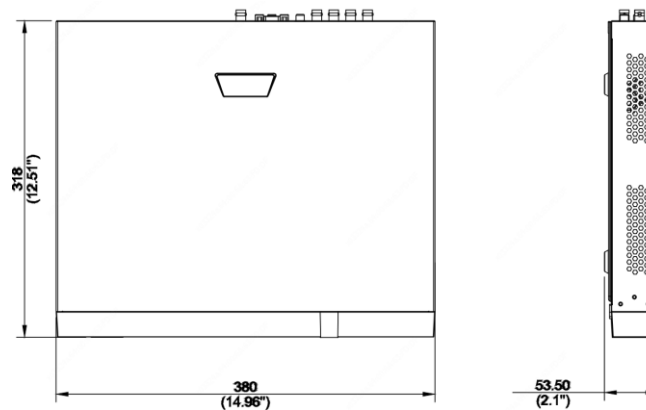

Rear Panel

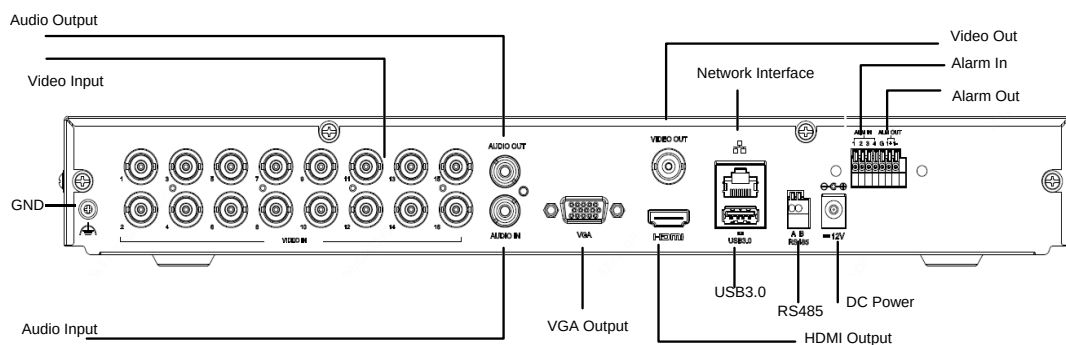

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2021 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.