


# KP-AC240

## Stand Alone Reader Dimensions

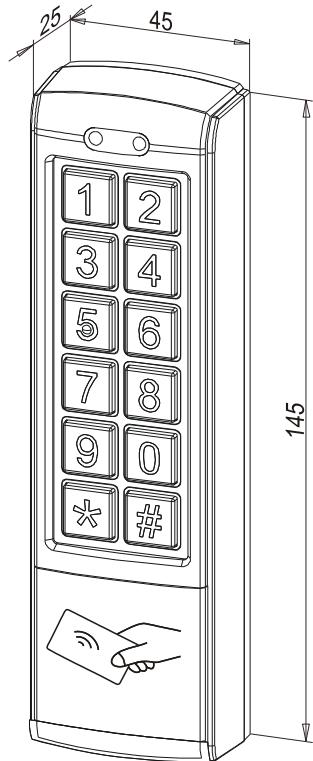

## Features

- Surface mount installation
- Epoxy sealed
- Aluminium alloy casing with vandal resistant screws
- Up to 1000+10 User entries (Cards and Pin)
- Access modes :
  - Proximity Card only
  - Pin or Proximity Card
  - Pin and Proximity Card
- Audible key responses
- Non-volatile memory
- Dual relay output for control of 2 doors
- Programmable length Master Code and Pin codes

## Description

The KP-AC240 is a dual relay output access controller. This Access control unit is able to store up to 1000 proximity card/tags and pin codes for relay 1 and also 10 card/tags and pin numbers for relay 2.

The KP-AC240 encompasses all the features required to control 2 doors from a single keypad, including Egress functions.

## Specifications

- ♦ 12 digits backlight keypad
- ♦ RFID Reader : EM 125 KHz
- ♦ Operating Voltage: 12 ~ 24V AC/DC  
Standby current: 30mA  
Working current: 160mA
- ♦ Operational temperature range: -30°C~70°C
- ♦ Cable length: 1 meter, 14-wires
- ♦ Waterproof, Dustproof: IP66 Rating
- ♦ Zone1: up to 1000 codes or cards, or combined
- ♦ Zone2: up to 10 codes or cards, or combined
- ♦ 2 relay outputs (NO/COM/NC)
- ♦ 2 EGRESS inputs
- ♦ Door release time: 0 ~ 99 seconds
- ♦ Dimensions: 45(W)×145(H)×25(D) (mm)