

## Product Guide

**A 2080C** 10 Zone 100V Line PA Speaker Selection Panel



# A 2080C 10 Zone 100V Line PA Speaker Selection Panel



### Overview

Enables the control of paging and background music over 10 speaker zones. An incoming signal is able to be switched to the zones required. An ALL CALL button is provided. The design allows multiple units to be connected together to create an infinite number of zones. Connection is via screw terminals on the rear panel of the unit.

Designed for distributed PA systems such as schools, clubs, office buildings and recreation centres. The unit is fully self contained and requires no external power source.

Suitable for 100V or 70V systems.

### Key Features

- ✓ Australian made
- ✓ 10 year manufacturer warranty with local product support
- ✓ 19" rack mount
- ✓ 10 zones & "All Call"
- ✓ 50W per zone
- ✓ Requires no power
- ✓ Units can be ganged together more zones
- ✓ Zone ID strip included

### About Redback® Public Address Products


**Redback® products are proudly designed, engineered and manufactured in Australia.**

Each unit is covered by a comprehensive 10 year parts and labour warranty. Redback® offers rock solid reliability from over 45 years experience in the commercial sound industry. Redback® offer locally available servicing and parts, plus the ability to offer feedback direct to the manufacturer.

### Specifications

Speaker connection:	Screw terminals
Power supply:	None required
Power handling:	50W per zone, total 500W
Dimensions:	482W x 152D x 44H mm
Weight:	2.2kg

### Rear Connections

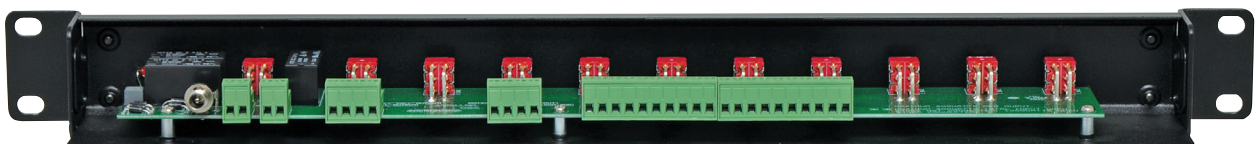

Made in Australia by Altronic Distributors Pty. Ltd.

Ph: (08) 9428 2199 Internet: [www.redbackaudio.com.au](http://www.redbackaudio.com.au)

© 2021 Altronic Distributors Pty. Ltd. Specifications subject to change without notice. E&OE. Revision date: 9/12/2021