

Securitron PowerJump ICPT Inductive Coupling Power Transfer

ASSA ABLOY

The global leader in
door opening solutions



The Securitron PowerJump ICPT transfers power contactlessly and invisibly across the door gap to run electrified hardware on the door.

No Wires or Moving Parts


- Protects your power pathway by making it invisible, eliminating wires across the gap that are vulnerable to vandalism or breakage
- Transfers power wirelessly across door gaps of up to 3/16"
- No need to core drill the door

Flexible & Versatile

- Flexible mounting: can be installed on hinge side, latch side or top of frame
- Dual voltage output 12VDC or 24VDC field selectable
- Use with electrified locks, latches or other door hardware requiring up to 6 watts (0.5A@12VDC) of power


Advanced Technology & Reliability

- Uses inductive coupling to send energy wirelessly across the door gap to power electrified locks and latches
- Adhesive backed templates for accurate installation
- MagnaCare® lifetime replacement, no-fault warranty

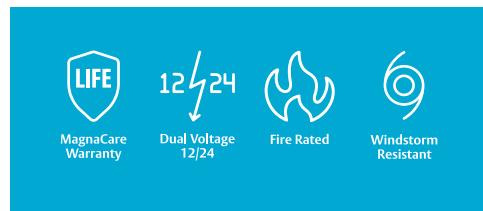


No Wires | Secure | Flexible

Dimensions

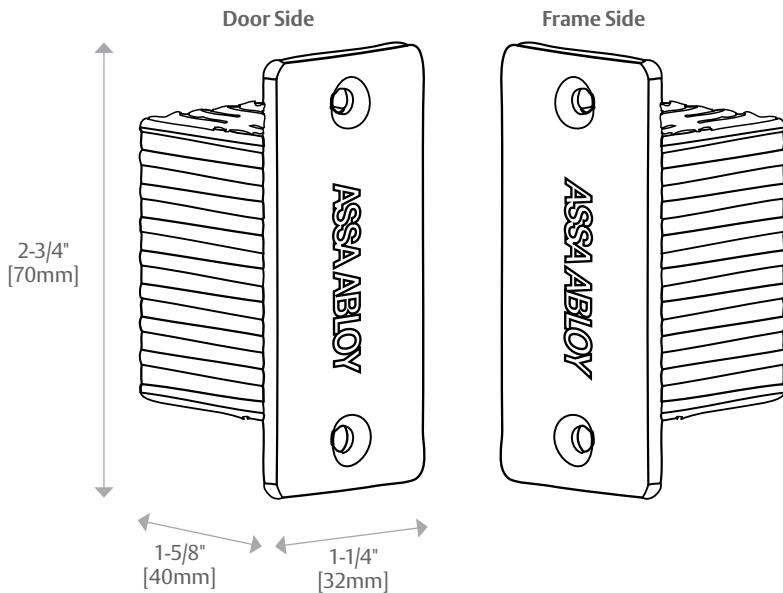

Watch how this power transfer works at <https://bit.ly/2n6GX98>

How to Order

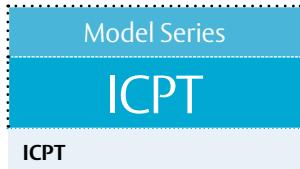

Specifications

Certifications

- UL 10C Fire Rated, 3 hour
- CAN4-S101 (ULC-S104) fire door conformant
- ANSI/SDI-BHMA A250.13
(+/- 150 psi) Windstorm Listed
- FCC Part 15 compliant

Endurance

- 2 million cycles

Dimensions

- **Send Unit:** (Frame Side)
2-3/4" H x 1-1/4" W x 1-3/8" D
[50.8mm H x 25.4mm W x 34.9mm D]
- **Receive Unit:** (Door Side)
2-3/4" H x 1-1/4" W x 1-5/8" D
[50.8mm H x 25.4mm W x 41.3mm D]

Electrical

- **Input:** 24 VDC only 500 mA max
- **Output:** 500 mA at 12 VDC
250 mA at 24 VDC

Operating Temperature

- -40° to 120°F [-40° to 49°C]