

ARLWP-85B

Infrared sensor exit button with remote control 12V-24V


Hand wave sensor button, which is activated by hand waving. When the sensor is correctly connected to your power supply and access control system, the door will open automatically when you open it with remote control.

Product Parameter

Max. Current: 50mA
Input Voltage: DC12-24V
LED: Yes
Output Terminals: NO, NC, COM
Color: Black, white
Water Proof Level: IP68
working frequency: 433Mhz
Transmit Distance: 5~8 cm
Backlight State: Blue to Green
Material: Tempered Glass Panel+ Plastic
Endurance test: 100,000 times
The distance of remote control: 20~30 m
Suitable Humidity: 0-95% (relative humidity)
Size: 86*86*11.5 mm



Dimensions

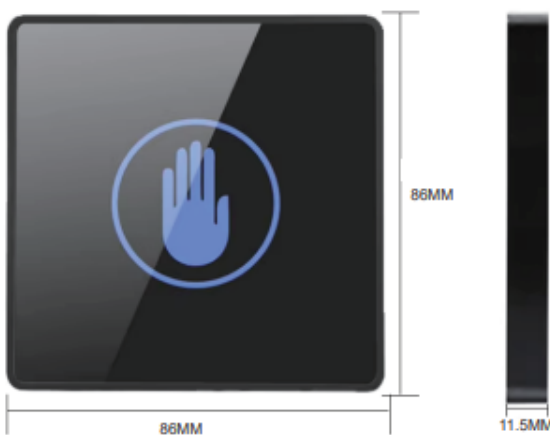

Wiring diagram

