


Data Cables

CORED DATA CABLES

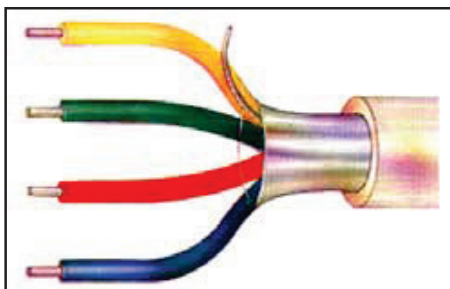


Low Voltage - UL Approved 2464

Use Data cable RS232 (Unbalanced)
Sheath Grey PVC - V105 Flame Retardant
Conductor Tinned copper wire
Pack 100m or 500m Reels
Insulation PVC V105
Screen Aluminum polyester laminate foil tape providing 100% shield earthed with a tinned copper drain wire for ease of termination .

Part Number	Description	Number of Conductors	Conductors (mm)	Nominal O.D. (mm)	Nominal Capacitance (pF/m)
BCC1100	4 CORE	4	7 x 0.20	4.8	90
BCC1110	6 CORE	6	7 x 0.20	5.5	90
BCC1120	8 CORE	8	7 x 0.20	5.9	90
BCC1130	12 CORE	12	7 x 0.20	6.9	90
BCC1140	18 CORE	18	7 x 0.20	8.1	90
BCC1150	25 CORE	25	7 X 0.20	9.3	90

PAIRED DATA CABLES

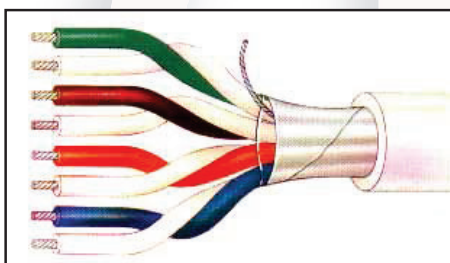

Low Voltage - UL Approved style 2919

Use Data cable RS422 (Balanced)
Sheath Grey PVC - V105 Flame Retardant
Conductor Tinned copper wire
Pack 100m or 500m Reels
Insulation Polypropylene
Screen Aluminum polyester laminate foil tape providing 100% shield earthed with a tinned copper drain wire for ease of termination .

Part Number	Number of Pairs	Number of Conductors	Conductors (mm)	Nominal O.D. (mm)	Nominal Capacitance (pF/m)
BCP2001	1	2	7 x 0.20	5.2	50
BCP2002	2	4	7 x 0.20	5.9	50
BCP2003	3	6	7 x 0.20	6.2	50
BCP2004	4	8	7 x 0.20	6.7	50
BCP2006	6	12	7 x 0.20	7.8	50
BCP2008	8	16	7 x 0.20	8.4	50
BCP2010	10	20	7 x 0.20	9.8	50
BCP2012	12	24	7 X 0.20	10.2	50
BCP2018	18	36	7 X 0.20	12.20	50
BCP2025	25	50	7 X 0.20	14.10	50

Melbourne
 Head Office
 7 Elata Drive
 Tullamarine VIC, 3043
 Ph: (03) 9338 9009
 Fax: (03) 9338 5996
 Sales@radum.com.au

Sydney
 Unit 4, 16A Hearne Street
 Mortdale, NSW, 2223
 Ph: (02) 9534 1851
 Fax: (02) 9534 2683
 Syd@radum.com.au

Queensland
 32 Redcliffe Gardens Drive
 Clontarf, QLD, 4019
 Ph: (07) 3283 3351
 Fax: (07) 3283 3102
 Qld@radum.com.au

Tasmania
 39 Pitcairn Street,
 Glenorchy, TAS, 7010
 Ph: 1300 1 72386
 Fax: (03) 6272 5755
 Tas@radum.com.au

Western Australia
 Unit 18, 9 Inspiration Drive
 Wangara, WA, 6065
 Ph: (08) 93039068
 Fax: (08) 93039069
 Wa@radum.com.au